


L7800ML Series



3100

Monolithic Linear IC

5 to 24V 1A 3-Pin Voltage Regulator

©2608

Features

- Output voltage L7805ML:5V L7806ML:6V L7807ML:7V L7808ML:8V
L7809ML:9V L7810ML:10V L7812ML:12V L7815ML:15V
L7818ML:18V L7820ML:20V L7824ML:24V
- Output current 1A
- On-chip overheat protector
- On-chip overcurrent limiter
- On-chip ASO protector
- TO-220ML package facilitating easy mounting and thermal design
- Micaless version that insulates the package from each pin, requiring no insulation for mounting

[Common to L7800ML series]

Maximum Ratings at Ta=25°C

				unit
Maximum Supply Voltage	V _{CC} max	Pin1	35	V
Allowable Power Dissipation	Pd max		2	W
		(Tc=25°C)	15	W
Operating Temperature	Topg		-20 to +80	°C
Storage Temperature	Tstg		-40 to +150	°C

[L7805ML]

Recommended Operating Conditions at Ta=25°C

			unit
Input Voltage	V _{IN}		7.5 to 20 V
Output Current	I _{OUT}		5 to 1000 mA


Operating Characteristics at Ta=25°C, V_{IN}=10V, I_{OUT}=500mA,

See specified Test Circuit.


			min	typ	max	unit
Output Voltage	V _{OUT}	Tj=25°C	4.8	5.0	5.2	V
Line Regulation	ΔV _{oline}	Tj=25°C, 7V ≤ V _{IN} ≤ 25V		3.0	50	mV
		" 8V ≤ V _{IN} ≤ 20V		1.0	25	mV
Load Regulation	ΔV _{oload}	Tj=25°C, 5mA ≤ I _{OUT} ≤ 1.5A			100	mV
		" 250mA ≤ I _{OUT} ≤ 750mA			50	mV

Continued on next page.

Equivalent Circuit

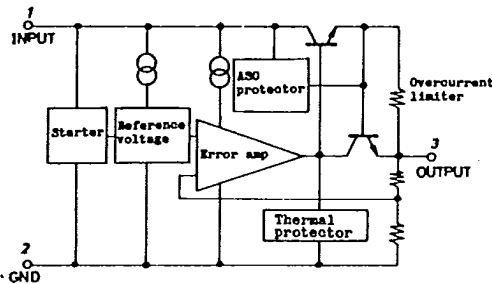

Case Outline 3100-S3TR (unit:mm)

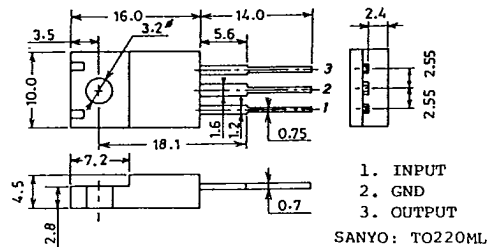

7017TA, TS No.2608-1/7

L7800ML Series

T-58-11-13

Continued from preceding page.

			min	typ	max	unit
Output Voltage	V_{OUT}	$7V \leq V_{IN} \leq 20V, 5mA \leq I_{OUT} \leq 1A$	4.75		5.25	V
Current Dissipation	I_{CC}	$T_j = 25^\circ C$			8.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$7V \leq V_{IN} \leq 25V$			1.3	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 1A$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		40		μV
Ripple Rejection	R_{rej}	$f = 120Hz$ $8V \leq V_{IN} \leq 19V$ $T_j = 25^\circ C$	62	80		dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT} = 1A$		2.0		V
Short Current	I_{OS}	$T_j = 25^\circ C, V_{IN} = 35V, \text{to GND}$		300		mA
Peak Output Current	I_{op}	$T_j = 25^\circ C$		2.2		A

[L7806ML]

Recommended Operating Conditions at $T_a = 25^\circ C$

			unit
Input Voltage	V_{IN}	8.5 to 21	V
Output Current	I_{OUT}	5 to 1000	mA

Operating Characteristics at $T_a = 25^\circ C, V_{IN} = 11V, I_{OUT} = 500mA$,
See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j = 25^\circ C$	5.75	6.0	6.25	V
Line Regulation	ΔV_{oline}	$T_j = 25^\circ C, 8V \leq V_{IN} \leq 25V$ " $9V \leq V_{IN} \leq 20V$		5.0	60	mV
Load Regulation	ΔV_{oload}	$T_j = 25^\circ C, 5mA \leq I_{OUT} \leq 1.5A$ " $250mA \leq I_{OUT} \leq 750mA$			120	mV
Output Voltage	V_{OUT}	$8V \leq V_{IN} \leq 21V, 5mA \leq I_{OUT} \leq 1A$	5.7		6.3	V
Current Dissipation	I_{CC}	$T_j = 25^\circ C$			8.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$8V \leq V_{IN} \leq 25V$			1.3	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 1A$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		45		μV
Ripple Rejection	R_{rej}	$f = 120Hz$ $9V \leq V_{IN} \leq 20V$ $T_j = 25^\circ C$	59	80		dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT} = 1A$		2.0		V
Short Current	I_{OS}	$T_j = 25^\circ C, V_{IN} = 35V, \text{to GND}$		300		mA
Peak Output Current	I_{op}	$T_j = 25^\circ C$		2.2		A

[L7807ML]

Recommended Operating Conditions at $T_a = 25^\circ C$

			unit
Input Voltage	V_{IN}	9.5 to 22	V
Output Current	I_{OUT}	5 to 1000	mA

Continued on next page.

L7800ML Series

T-58-11-13

Continued from preceding page.

Operating Characteristics at Ta=25°C, V_{IN}=12V, I_{OUT}=500mA,
See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V _{OUT}	T _j =25°C	6.72	7.0	7.28	V
Line Regulation	ΔV _{oline}	T _j =25°C, 9V ≤ V _{IN} ≤ 25V		6.0	60	mV
		" 10V ≤ V _{IN} ≤ 20V		2.0	30	mV
Load Regulation	ΔV _{oload}	T _j =25°C, 5mA ≤ I _{OUT} ≤ 1.5A			140	mV
		" 250mA ≤ I _{OUT} ≤ 750mA			70	mV
Output Voltage	V _{OUT}	9V ≤ V _{IN} ≤ 22V, 5mA ≤ I _{OUT} ≤ 1A	6.6		7.4	V
Current Dissipation	I _{CC}	T _j =25°C			8.0	mA
Current Dissipation Variation (Line)	ΔI _{CCline}	9V ≤ V _{IN} ≤ 25V			1.3	mA
Current Dissipation Variation (Load)	ΔI _{CCload}	5mA ≤ I _{OUT} ≤ 1A			0.5	mA
Output Noise Voltage	V _{NO}	10Hz ≤ f ≤ 100kHz		48		μV
Ripple Rejection	R _{rej}	f=120Hz	58	80		dB
		10V ≤ V _{IN} ≤ 21V				
		T _j =25°C				
Minimum Input-Output Voltage Drop	V _{drop}	I _{OUT} =1A		2.0		V
Short Current	I _{OS}	T _j =25°C, V _{IN} =35V, to GND		300		mA
Peak Output Current	I _{op}	T _j =25°C		2.2		A

[L7808ML]

Recommended Operating Conditions at Ta=25°C

				unit
Input Voltage	V _{IN}		10.5 to 23	V
Output Current	I _{OUT}		5 to 1000	mA

Operating Characteristics at Ta=25°C, V_{IN}=15V, I_{OUT}=500mA,
See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V _{OUT}	T _j =25°C	7.7	8.0	8.3	V
Line Regulation	ΔV _{oline}	T _j =25°C, 10.5V ≤ V _{IN} ≤ 25V		6.0	60	mV
		" 11V ≤ V _{IN} ≤ 20V		2.0	30	mV
Load Regulation	ΔV _{oload}	T _j =25°C, 5mA ≤ I _{OUT} ≤ 1.5A			160	mV
		" 250mA ≤ I _{OUT} ≤ 750mA			80	mV
Output Voltage	V _{OUT}	10.5V ≤ V _{IN} ≤ 23V, 5mA ≤ I _{OUT} ≤ 1A	7.6		8.4	V
Current Dissipation	I _{CC}	T _j =25°C			8.0	mA
Current Dissipation Variation (Line)	ΔI _{CCline}	10.5V ≤ V _{IN} ≤ 25V			1.0	mA
Current Dissipation Variation (Load)	ΔI _{CCload}	5mA ≤ I _{OUT} ≤ 1A			0.5	mA
Output Noise Voltage	V _{NO}	10Hz ≤ f ≤ 100kHz		50		μV
Ripple Rejection	R _{rej}	f=120Hz	56	80		dB
		11.5V ≤ V _{IN} ≤ 22V				
		T _j =25°C				
Minimum Input-Output Voltage Drop	V _{drop}	I _{OUT} =1A		2.0		V
Short Current	I _{OS}	T _j =25°C, V _{IN} =35V, to GND		300		mA
Peak Output Current	I _{op}	T _j =25°C		2.2		A

L7800ML Series

T-58-11-13

[L7809ML]**Recommended Operating Conditions at Ta=25°C**

			unit
Input Voltage	V_{IN}	12 to 25	V
Output Current	I_{OUT}	5 to 1000	mA

Operating Characteristics at Ta=25°C, $V_{IN}=16V$, $I_{OUT}=500mA$,

See specified Test Circuit.			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ C$	8.6	9.0	9.4	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ C, 11.5V \leq V_{IN} \leq 25V$		6.0	100	mV
		" $12V \leq V_{IN} \leq 20V$		2.0	50	mV
Load Regulation	ΔV_{oload}	$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 1.5A$			180	mV
		" $250mA \leq I_{OUT} \leq 750mA$			90	mV
Output Voltage	V_{OUT}	$11.5V \leq V_{IN} \leq 24V, 5mA \leq I_{OUT} \leq 1A$	8.5		9.5	V
Current Dissipation	I_{CC}	$T_j=25^\circ C$			8.0	mA
Current Dissipation	ΔI_{CCline}	$11.5V \leq V_{IN} \leq 25V$			1.0	mA
Variation (Line)						
Current Dissipation	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 1A$			0.5	mA
Variation (Load)						
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		60		μV
Ripple Rejection	R_{rej}	$f=120Hz$	56	80		dB
		$12V \leq V_{IN} \leq 23V$				
		$T_j=25^\circ C$				
Minimum Input-Output	V_{drop}	$I_{OUT}=1A$		2.0		V
Voltage Drop						
Short Current	I_{OS}	$T_j=25^\circ C, V_{IN}=35V, to GND$		300		mA
Peak Output Current	I_{op}	$T_j=25^\circ C$		2.2		A

[L7810ML]**Recommended Operating Conditions at Ta=25°C**

			unit
Input Voltage	V_{IN}	13 to 25	V
Output Current	I_{OUT}	5 to 1000	mA

Operating Characteristics at Ta=25°C, $V_{IN}=17V$, $I_{OUT}=500mA$,

See specified Test Circuit.			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ C$	9.6	10.0	10.4	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ C, 12.5V \leq V_{IN} \leq 25V$		7.0	100	mV
		" $13V \leq V_{IN} \leq 22V$		2.0	50	mV
Load Regulation	ΔV_{oload}	$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 1.5A$			200	mV
		" $250mA \leq I_{OUT} \leq 750mA$			100	mV
Output Voltage	V_{OUT}	$12.5V \leq V_{IN} \leq 25V, 5mA \leq I_{OUT} \leq 1A$	9.5		10.5	V
Current Dissipation	I_{CC}	$T_j=25^\circ C$			8.0	mA
Current Dissipation	ΔI_{CCline}	$12.5V \leq V_{IN} \leq 25V$			1.0	mA
Variation (Line)						
Current Dissipation	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 1A$			0.5	mA
Variation (Load)						
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		65		μV
Ripple Rejection	R_{rej}	$f=120Hz$	55	80		dB
		$13V \leq V_{IN} \leq 25V$				
		$T_j=25^\circ C$				
Minimum Input-Output	V_{drop}	$I_{OUT}=1A$		2.0		V
Voltage Drop						
Short Current	I_{OS}	$T_j=25^\circ C, V_{IN}=35V, to GND$		300		mA
Peak Output Current	I_{op}	$T_j=25^\circ C$		2.2		A

L7800ML Series

T-58-11-13

[L7812ML]**Recommended Operating Conditions at Ta=25°C**

			unit
Input Voltage	V_{IN}	15 to 25	V
Output Current	I_{OUT}	5 to 1000	mA

Operating Characteristics at Ta=25°C, $V_{IN}=19V$, $I_{OUT}=500mA$,

See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ C$	11.5	12.0	12.5	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ C, 14.5V \leq V_{IN} \leq 30V$		8.0	100	mV
		" $16V \leq V_{IN} \leq 25V$		2.0	50	mV
Load Regulation	ΔV_{oload}	$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 1.5A$			240	mV
		" $250mA \leq I_{OUT} \leq 750mA$			120	mV
Output Voltage	V_{OUT}	$14.5V \leq V_{IN} \leq 27V, 5mA \leq I_{OUT} \leq 1A$	11.4		12.6	V
Current Dissipation	I_{CC}	$T_j=25^\circ C$			8.0	mA
Current Dissipation	ΔI_{CCline}	$14.5V \leq V_{IN} \leq 30V$			1.0	mA
Variation (Line)						
Current Dissipation	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 1A$			0.5	mA
Variation (Load)						
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$			75	μV
Ripple Rejection	R_{rej}	$f=120Hz$	55	80		dB
		$15V \leq V_{IN} \leq 25V$				
		$T_j=25^\circ C$				
Minimum Input-Output	V_{drop}	$I_{OUT}=1A$			2.0	V
Voltage Drop						
Short Current	I_{OS}	$T_j=25^\circ C, V_{IN}=35V, to GND$			300	mA
Peak Output Current	I_{op}	$T_j=25^\circ C$			2.2	A

[L7815ML]**Recommended Operating Conditions at Ta=25°C**

			unit
Input Voltage	V_{IN}	18 to 30	V
Output Current	I_{OUT}	5 to 1000	mA

Operating Characteristics at Ta=25°C, $V_{IN}=23V$, $I_{OUT}=500mA$,

See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ C$	14.4	15.0	15.6	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ C, 17.5V \leq V_{IN} \leq 30V$		10.0	100	mV
		" $19V \leq V_{IN} \leq 30V$		3.0	50	mV
Load Regulation	ΔV_{oload}	$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 1.5A$			300	mV
		" $250mA \leq I_{OUT} \leq 750mA$			150	mV
Output Voltage	V_{OUT}	$17.5V \leq V_{IN} \leq 30V, 5mA \leq I_{OUT} \leq 1A$	14.25		15.75	V
Current Dissipation	I_{CC}	$T_j=25^\circ C$			8.0	mA
Current Dissipation	ΔI_{CCline}	$17.5V \leq V_{IN} \leq 30V$			1.0	mA
Variation (Line)						
Current Dissipation	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 1A$			0.5	mA
Variation (Load)						
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$			90	μV
Ripple Rejection	R_{rej}	$f=120Hz$	54	70		dB
		$18.5V \leq V_{IN} \leq 28.5V$				
		$T_j=25^\circ C$				
Minimum Input-Output	V_{drop}	$I_{OUT}=1A$			2.0	V
Voltage Drop						
Short Current	I_{OS}	$T_j=25^\circ C, V_{IN}=35V, to GND$			300	mA
Peak Output Current	I_{op}	$T_j=25^\circ C$			2.1	A

L7800ML Series

T-58-11-13

[L7818ML]**Recommended Operating Conditions at Ta=25°C**

			unit
Input Voltage	V_{IN}	21 to 33	V
Output Current	I_{OUT}	5 to 1000	mA

Operating Characteristics at Ta=25°C, $V_{IN}=27V, I_{OUT}=500mA$,

See specified Test Circuit.			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ C$	17.3	18.0	18.7	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ C, 21V \leq V_{IN} \leq 35V$		10.0	100	mV
		" $22V \leq V_{IN} \leq 35V$		5.0	50	mV
Load Regulation	ΔV_{oload}	$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 1.5A$			360	mV
		" $250mA \leq I_{OUT} \leq 750mA$			180	mV
Output Voltage	V_{OUT}	$21V \leq V_{IN} \leq 33V, 5mA \leq I_{OUT} \leq 1A$	17.1		18.9	V
Current Dissipation	I_{CC}	$T_j=25^\circ C$			8.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$21V \leq V_{IN} \leq 33V$			1.0	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 1A$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		100		μV
Ripple Rejection	R_{rej}	$f=120Hz$	53	70		dB
		$22V \leq V_{IN} \leq 33V$ $T_j=25^\circ C$				
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=1A$		2.0		V
Short Current	I_{OS}	$T_j=25^\circ C, V_{IN}=35V, to GND$		300		mA
Peak Output Current	I_{op}	$T_j=25^\circ C$		2.1		A

[L7820ML]**Recommended Operating Conditions at Ta=25°C**

			unit
Input Voltage	V_{IN}	23 to 35	V
Output Current	I_{OUT}	5 to 1000	mA

Operating Characteristics at Ta=25°C, $V_{IN}=29V, I_{OUT}=500mA$,

See specified Test Circuit.			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ C$	19.2	20.0	20.8	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ C, 23V \leq V_{IN} \leq 35V$		10.0	100	mV
		" $24V \leq V_{IN} \leq 35V$		5.0	50	mV
Load Regulation	ΔV_{oload}	$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 1.5A$			400	mV
		" $250mA \leq I_{OUT} \leq 750mA$			200	mV
Output Voltage	V_{OUT}	$23V \leq V_{IN} \leq 35V, 5mA \leq I_{OUT} \leq 1A$	19.0		21.0	V
Current Dissipation	I_{CC}	$T_j=25^\circ C$			8.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$23V \leq V_{IN} \leq 35V$			1.0	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 1A$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		110		μV
Ripple Rejection	R_{rej}	$f=120Hz$	53	70		dB
		$24V \leq V_{IN} \leq 34V$ $T_j=25^\circ C$				
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=1A$		2.0		V
Short Current	I_{OS}	$T_j=25^\circ C, V_{IN}=35V, to GND$		300		mA
Peak Output Current	I_{op}	$T_j=25^\circ C$		2.1		A

L7800ML Series

T-58-11-13

[L7824ML]

Recommended Operating Conditions at Ta=25°C

Parameter	Symbol	Value	unit
Input Voltage	V _{IN}	27 to 35	V
Output Current	I _{OUT}	5 to 1000	mA

Operating Characteristics at Ta=25°C, V_{IN}=33V, I_{OUT}=500mA,

See specified Test Circuit.

Parameter	Symbol	Conditions	min	typ	max	unit
Output Voltage	V _{OUT}	T _j =25°C	23.0	24.0	25.0	V
Line Regulation	ΔV _{oline}	T _j =25°C, 27V ≤ V _{IN} ≤ 35V		10.0	100	mV
		" 28V ≤ V _{IN} ≤ 35V		5.0	50	mV
Load Regulation	ΔV _{oload}	T _j =25°C, 5mA ≤ I _{OUT} ≤ 1.5A			480	mV
		" 250mA ≤ I _{OUT} ≤ 750mA			240	mV
Output Voltage	V _{OUT}	27V ≤ V _{IN} ≤ 35V, 5mA ≤ I _{OUT} ≤ 1A	22.8		25.2	V
Current Dissipation	I _{CC}	T _j =25°C			8.0	mA
Current Dissipation Variation (Line)	ΔI _{CCline}	27V ≤ V _{IN} ≤ 35V			1.0	mA
Current Dissipation Variation (Load)	ΔI _{CCload}	5mA ≤ I _{OUT} ≤ 1A			0.5	mA
Output Noise Voltage	V _{NO}	10Hz ≤ f ≤ 100kHz			170	μV
Ripple Rejection	R _{rej}	f=120Hz	50	70		dB
		28V ≤ V _{IN} ≤ 35V				
		T _j =25°C				
Minimum Input-Output Voltage Drop	V _{drop}	I _{OUT} =1A		2.0		V
Short Current	I _{OS}	T _j =25°C, V _{IN} =35V, to GND			300	mA
Peak Output Current	I _{op}	T _j =25°C			2.1	A

Test Circuit (Common to L7800ML Series)

