

High Extinction Ratio InGaAs Photodetector Module

SC Connector Receptacle Package Preliminary Specifications

Features

- High responsivity at 1300 nm
- Bandwidth greater than 1 GHz
- High extinction ratio
- Rugged coaxial package

Applications

- Fiber optic receivers
 - Passive optical networks
 - Test & measurement equipment

Preliminary Specifications
Optical / Electrical Characteristics
(@ 25°C, $V_R = 5V$ Unless otherwise noted.)


**High Extinction Ratio
InGaAs Photodetector Module**

EPM601RSC

Parameter	Min.	Typ.	Max.	Units
Active Diameter		75		μm
Responsivity @ 1300 nm ¹	0.75	0.80		A/W
Extinction Ratio ²	500	1000		
Dark Current		0.15	0.6	nA
Total Capacitance ³				
@ 5V		1.1	1.2	pF
@ 2.5V		1.2	1.3	pF
Bandwidth ⁴		1.5		GHz
Rise Time ⁵		200		ps

Notes:

- ¹ Measured with 50 μm , 0.2 N.A., graded index fiber. Expect 0.75 A/W minimum responsivity with singlemode fiber.
- ² $V_f = 3V$. Ratio is $I(1) / I(0)$ out of photodiode 20ns after pulse turned off. 50/125 μm MMF used.
- ³ Measured with case and cathode connected
- ⁴ -3 dB point into a 50 Ω load
- ⁵ $R_{L,DC} = 50 \Omega$

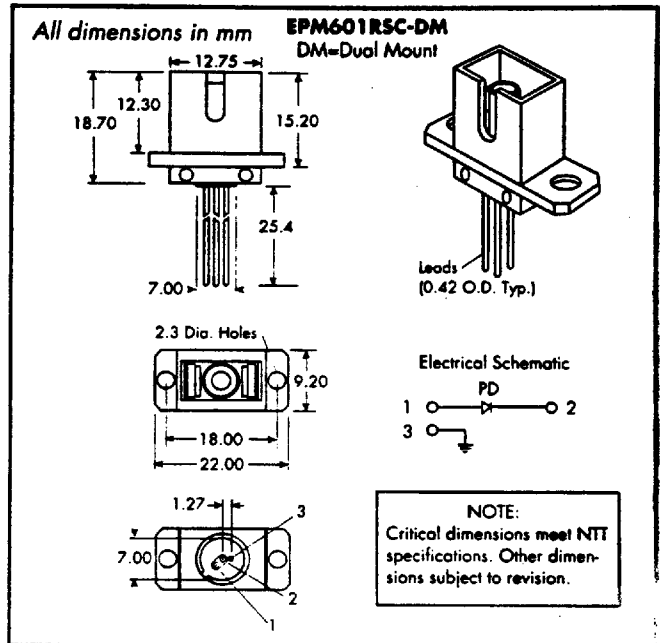

Maximum Ratings

EPM601RSC

Parameter	Rating	Units
Reverse Voltage	25	V
Reverse Current ^A	10	mA
Forward Current ^B	10	mA
Operating Temperature	-40 / +85	°C
Storage Temperature	-40 / +85	°C

Notes:

- ^A Under reverse bias, current at which device may be damaged.
- ^B Under forward bias, current at which device may be damaged.

Figure 1

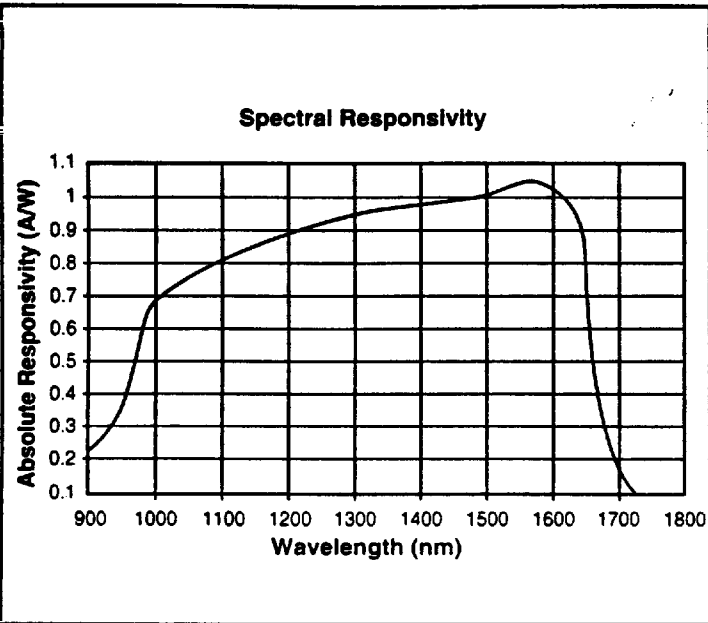


Figure 2

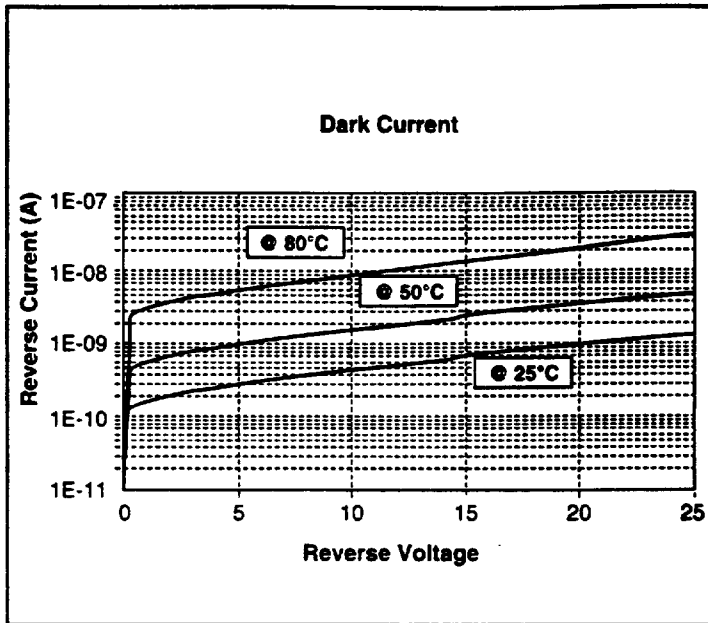


Figure 3


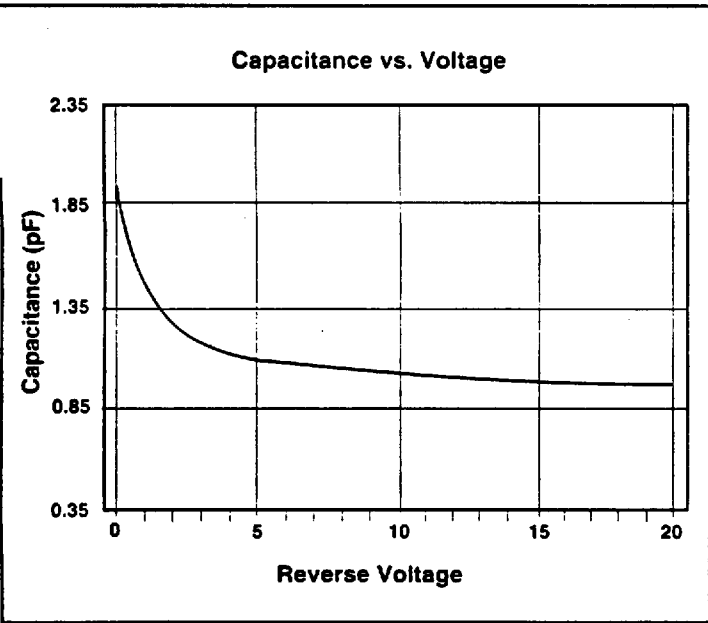


Figure 4

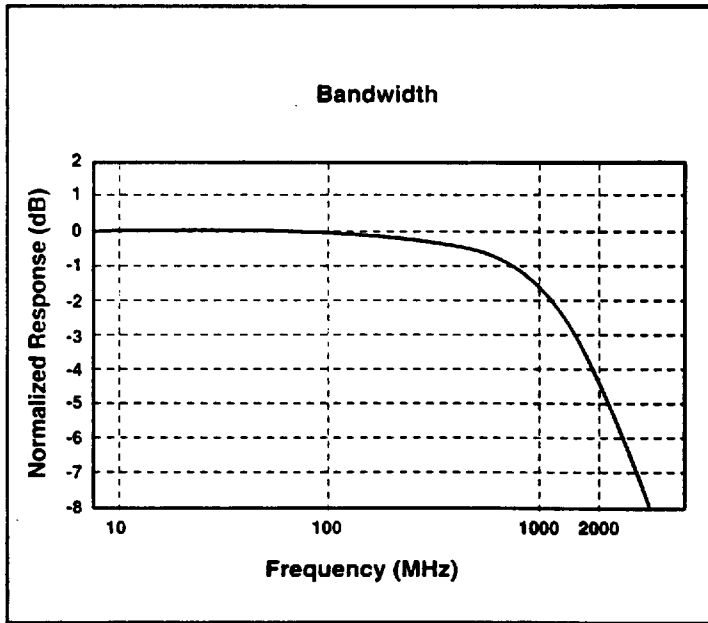

EPITAXX, Inc. believes the information contained in this document to be accurate. However, no responsibility is assumed for its use nor for any infringement of the rights of third parties. EPITAXX, Inc. reserves the right to introduce changes without notice.

EPITAXX

Corporate Headquarters
 7 Graphics Drive • West Trenton, NJ 08628
 TEL (609) 538-1800 • FAX (609) 538-1684

West Coast Sales Office
 Los Angeles, CA 90067
 TEL (310) 551-6507 • FAX (310) 551-6577

2

■ 3360406 0000322 495 ■