


# High Operating Temperature Poly-carbonmonofluoride Lithium Coin Batteries (BR "A" Series): Individual Specifications

## BR2330A

### ■ Dimensions(mm)




Weight:3.2g

**Note:** This bare cell diagram is for size reference only. Please refer to the tab configurations at the end of this section for available tabs.

## BR2450A\*

### ■ Dimensions(mm)



Weight:5.0g

**Note:** This bare cell diagram is for size reference only. Please refer to the tab configurations at the end of this section for available tabs.


### ■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	255
Continuous standard load (mA)	0.03
Operating temperature (C)	-40 ~ +125

### ■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	550
Continuous standard load (mA)	0.03
Operating temperature (C)	-40 ~ +125

### ■ Temperature Characteristics

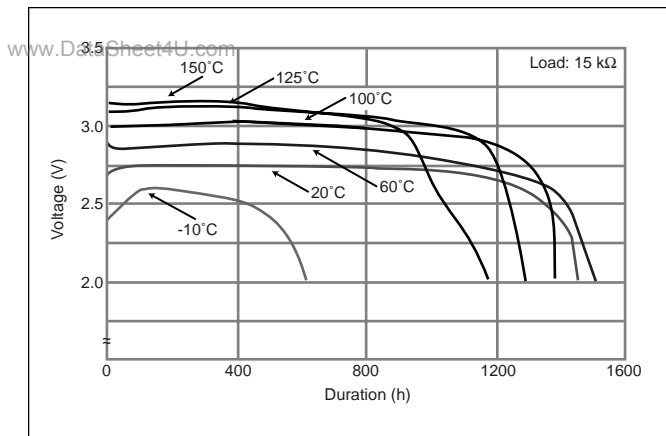

\* Please contact Panasonic for the latest information on this product.