



Features


- ◇ For RF SAW filter
- ◇ Single-ended operation
- ◇ Ceramic Surface Mount Package
- ◇ Small size
- ◇ No matching required for operation at 50Ω
- ◇ RoHS compliant (2002/95/EC), Pb-free

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	422.5	-
Insertion Loss	dB	-	1.5	2.5
1 dB Bandwidth	MHz	6	6.37	-
Passband Variation(420~425MHz)	dB	-	0.6	-
Absolute Delay	usec	-	0.12	-
Ultimate Rejection	0~400MHz	dB	40	-
	420~425MHz	dB	20	-
	450~600MHz	dB	40	-
Material Temperature coefficient	KHz/°C	-13.52		
Substrate Material	-	42LT		
Ambient Temperature	°C	25		
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-45	-	+105
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1A		
Package Size	SMD5.0*5.0			

Notes:

1. All specifications are based on the test circuit shown;
2. In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
4. This is the optimum impedance in order to achieve the performance show.

	SIPAT Co., Ltd. (CETC No.26 Research Institute) #14 Nanping Huayuan Road, Chongqing, China, 400060	Part Number	LBT42301	
		Rev. Date	2008-07-22	
		Ver.	1.0	Page


Matching Configuration



Source/Load Impedance=50 ohm

Notes - Component values may change depending on board layout.

Package Dimension

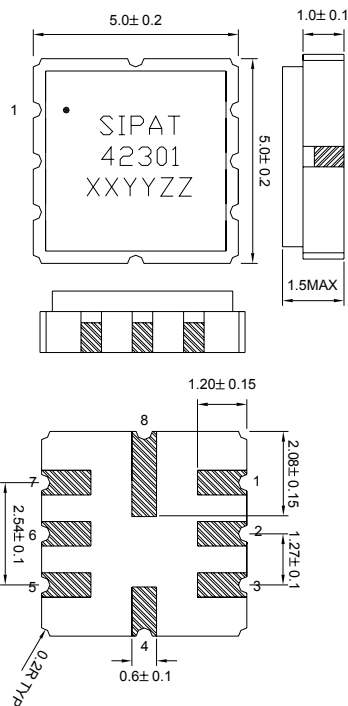

Pad Configuration:

Input: 2
Output: 6
Ground: All Others

Marking Configuration:

- 1) •: Pad Number 1 Index
- 2) SIPAT: Manufacturer Name
- 3) 42301: Part Number
- 4) XXYY: Date(Year/month)
- 5) ZZ: Identified Code

Package: SMD5.0*5.0

Unit: mm




SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBT42301	
Rev. Date	2008-07-22	
Ver.	1.0	Page 2/3


Typical Performance

Frequency Respond

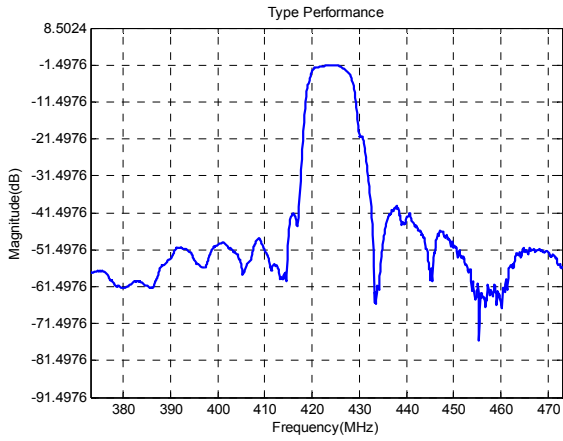


Horizontal: 10MHz/Div Vertical: 10dB/Div

Passband Respond

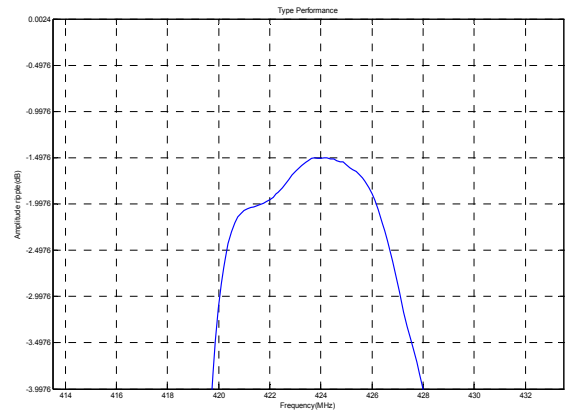


Horizontal: 2MHz/Div Vertical: 0.5dB/Div

Group Delay Variation($f_0 \pm 3\text{MHz}$)

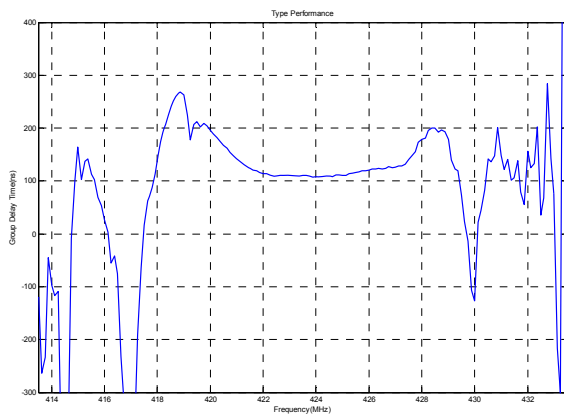


Horizontal: 2MHz/Div Vertical: 100ns/Div

Phase Linearity($f_0 \pm 3\text{MHz}$)

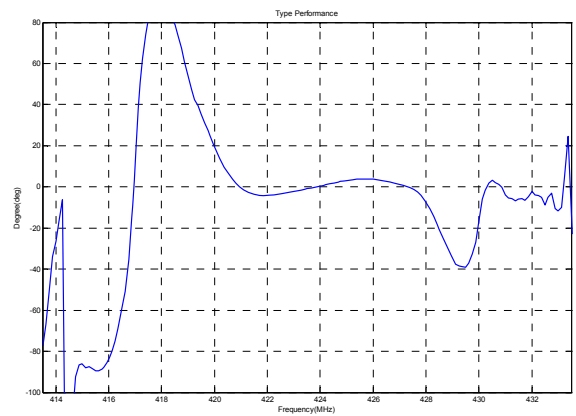


Horizontal: 2MHz/Div Vertical: 20deg/Div

Smith Chart S11

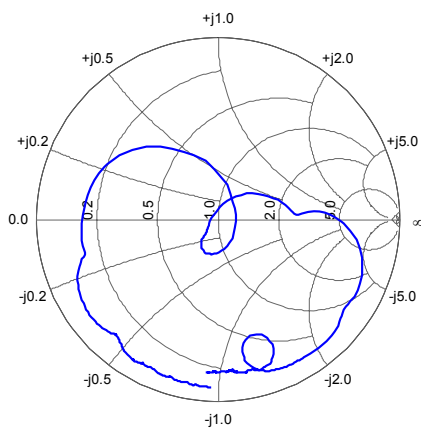

Smith Chart S22

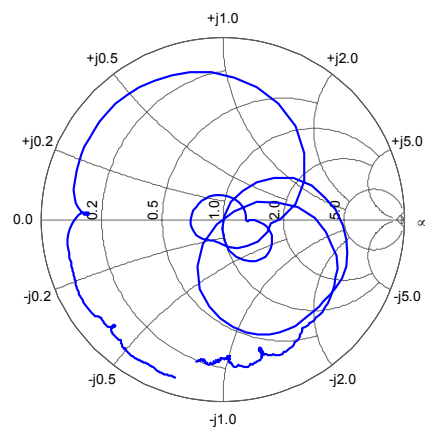

SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBT42301	
Rev. Date	2008-07-22	
Ver.	1.0	Page 3/3