


TOLERANCE UNLESS SPECIFIED =

.XXX = +/- .005


.XX = +/- .015

FRACTIONS = +/- .032



28-180.DC2




XXXX
VDE REG. NO.



MTG

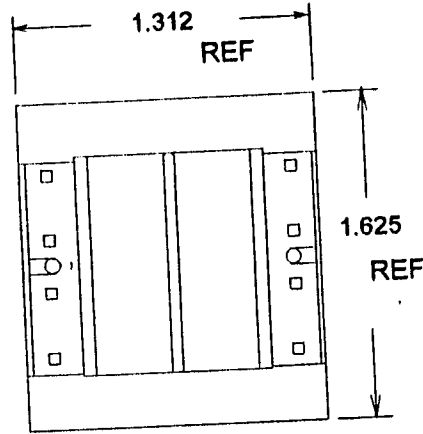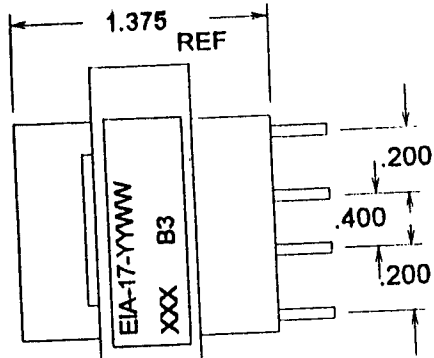

PC PINS .025 SQ

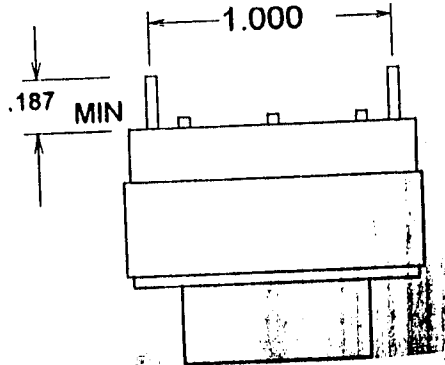

115/230V
50/60 HZ

PRI 2

SEC 2

14 V @ 0.18 A

PRI 1

SEC 1

14 V @ 0.18 A

5 VA

PRODUCTION TESTS

URNS RATIO = 100%

DC RESISTANCE IN OHMS	1-3 =	340 NOM
	4-6 =	408 NOM
	7-9 =	10.3 NOM
	10-12 =	12.1 NOM

MAX EXCITATION CURRENT = .016 A

APPLY 230V 60HZ 1-6 (3+4)

PRI WDGS 114.5 TO 115.5 V

SEC WDGS 17.7 TO 18.5 V

HIPOT: 4000V P-S

4000V P,S, TO CORE

600V P-P, S-S