

WORLDWIDE



## 8 Watt LED Strip

### Light Source

- 6 High Power Light Emitting Diodes (1 Watt LEDs)
- Colors: Cool White, Warm White, Blue, Cyan, Green, Amber and Red
- Consistent unit-to-unit color temperature

### • Model-ILL2A0005

- 11.9" (302mm) x 0.5" (13mm) strip
- Operating life 50,000 hours
- Metal Clad PCB Substrate
- 8" power leads
- Compatible with range of standard and custom drivers
- For Decorative Edge Lighting, Cove Lighting, Architectural Lighting, Task Lighting, Point of Purchase, Cabinet and Display Case Lighting




P/N	Color	Color Temp - Dominant Wavelength	Typical Luminous Flux (Lumens)	Design Current (mA)	Power Consumption (Watts)
ILL2A0005A	Cool White	6000K +/- 250K	240	350	7.5
ILL2A0005B	Warm White	3300K +/- 250K	120	350	7.5
ILL2A0005C	Blue	470nm	72	350	7.5
ILL2A0005D	Cyan	505nm	240	350	7.5
ILL2A0005E	Green	530nm	240	350	7.5
ILL2A0005F	Amber	589nm	252	350	5.5
ILL2A0005G	Red	625nm	264	350	5.5

WORLDWIDE




## Specifications

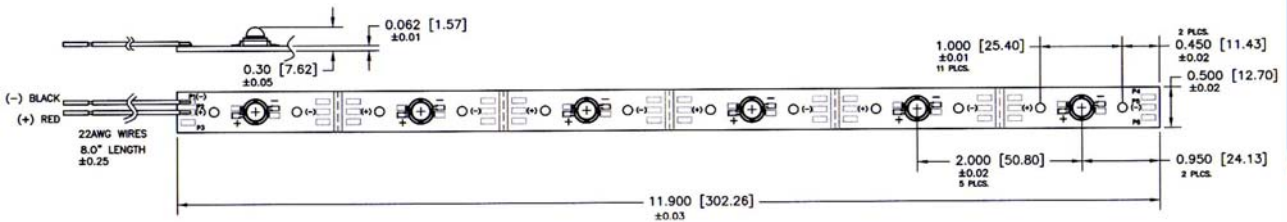


### Operating Specifications:

- Operating PCB temperature: 65 °C (Recommended)
- Maximum PCB temperature: 100 °C
- Thermal Resistance (Rthj-a): 8.4 °C/W
- Projected life: 50,000 hours (70% lumen maintenance at 65 °C)
- \* Additional heat sinking required, refer to CML technical support for thermal management guidelines

## Photometric Data

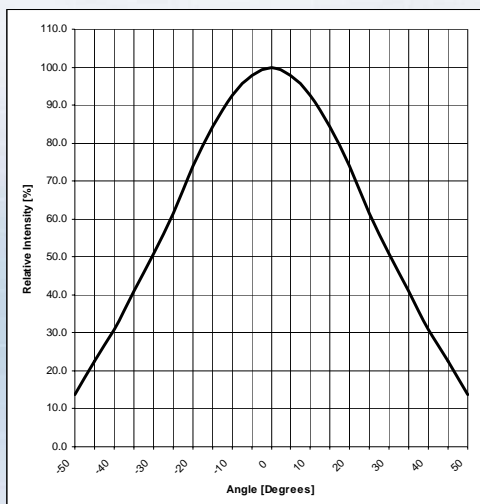

Radiation Pattern (in line – parallel) (CW)

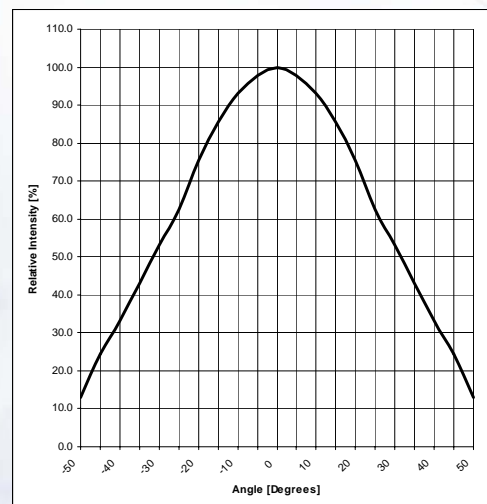

Radiation Pattern (orthogonal) (CW)



America:  
CML Innovative Technologies, Inc.  
147 Central Avenue  
Hackensack - NJ 07601 - USA  
Tel: 1-201-489 - 8989  
Fax: 1-201-489 - 6911  
e-mail: americas@cml-it.com

Europe:  
CML Technologies GmbH & Co. KG  
Robert-Bunsen-Str. 1  
67098 Bad Dürkheim - GERMANY  
Tel: +49 (0) 6322 9567-0  
Fax: +49 (0) 6322 9567-88  
e-mail: europe@cml-it.com

Asia:  
CML Innovative Technologies, Inc.  
61 Aida Street  
Singapore 459975  
Tel: (65) 9630 - 5003  
e-mail: asia@cml-it.com