


# Piezo Buzzer (DC)




CPB3207


Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB3207HC35BPA	3 ~ 24	12	6	85 at 10cm	3500 ± 500	Continuous	-20 ~ +60	ABS	8
CPB3207HC58BPA	3 ~ 24	12	8	85 at 10cm	5800 ± 500	Continuous	-20 ~ +60	ABS	8

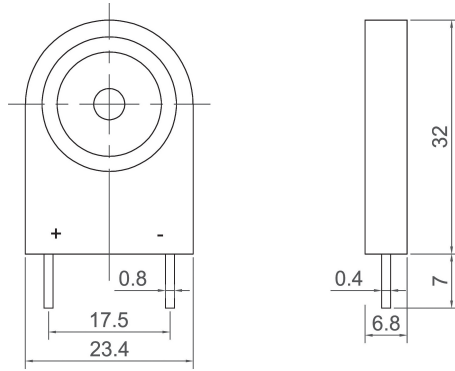

CPB3214

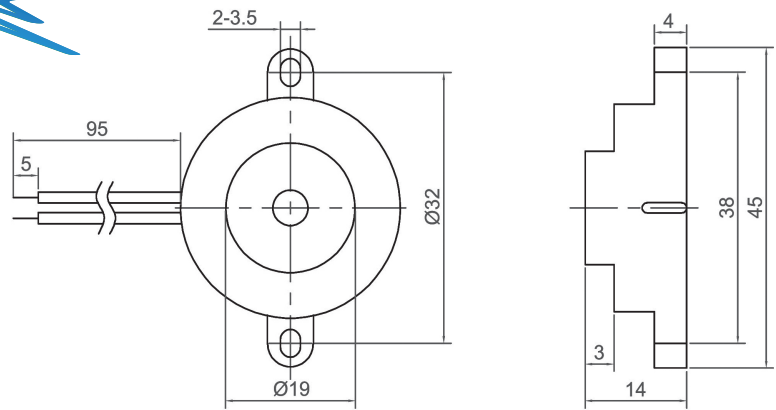

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB3214HC39BW	3 ~ 28	12	15	87 at 30cm	3900 ± 500	Continuous	-20 ~ +60	ABS	8

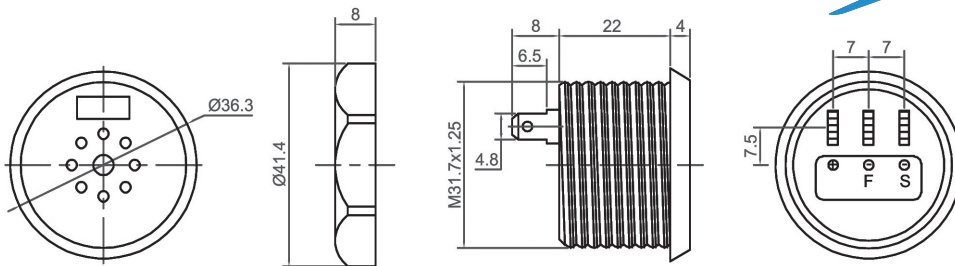

CPB3626-H

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB3626HC30BG	5 ~ 28	12	18	85 at 1m	3000 ± 500	Continuous	-20 ~ +60	ABS	35
CPB3626HCF30BG	5 ~ 28	12	18	85 at 1m	3000 ± 500	Continuous / Fast Pulse	-20 ~ +60	ABS	35
CPB3626HF30BG	5 ~ 28	12	18	85 at 1m	3000 ± 500	Fast Pulse	-20 ~ +60	ABS	35

**Your Efficient Supplier**  
[www.canopus.com.hk](http://www.canopus.com.hk)

TEL.: (852) 2806 2812

Fax: (852) 2652 2216

CANOPUS