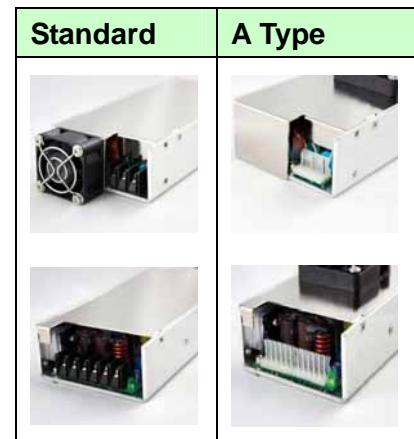


**KEY FEATURES**

- Enclosed Switching Power Supply
- Universal Input: 90-264 VAC
- With P.F.C. Function, PF>0.95
- Cooling by Built-in 12 VDC FAN
- 240W Convection without FAN
- Protections: Over Load / Over Voltage /  
Over Temperature / Short Circuit  
All by Auto-recovery
- Leakage Current <300uA
- High Power Density
- High Efficiency up to 93%
- RoHS Compliant Design
- Ultra Compact Size: 6.8 x 3.2 x 2.1 Inches
- 3-Years Product Warranty


**ELECTRICAL SPECIFICATIONS**

Model No.	AQF360E-12S	AQF360E-24S	AQF360E-36S	AQF360E-48S	AQF360E-54S
Max Output Wattage (W)	360W				
Input	Voltage				
	90-264 VAC or 120-370 VDC				
	Frequency (Hz)				
	47-63 Hz				
	Current (Full load)				
	< 4.0 A max. (115 VAC) / < 2.0 A max. (230 VAC)				
Output	Inrush Current (<2ms)				
	< 30 A max. (115 VAC) / < 60 A max. (230 VAC)				
	Leakage Current				
	< 0.3 mA max.(240VAC 63Hz)				
	Power Factor				
	PF>0.98 (115 VAC) / PF>0.93 (230 VAC) at Full Load				
	Voltage (V.DC.)				
	12V      24V      36V      48V      54V				
	Trim				
	10.8 ~ 13.2V    21.6 ~ 26.4V    32.7 ~ 39.6V    44 ~ 51V    51.3 ~ 56.7V				
	Voltage Accuracy				
	±2%				
Current (Convection) (A) max					
30      15      10      7.5      6.66					
Line Regulation (LL-HL) (typ.)					
±1%					
Load Regulation (5-100%) (typ.)					
±1%					
Minimum Load					
1%					
Maximum Capacitive Load					
85000 uF      48000 uF      21000 uF      13000 uF      7000 uF					
Ripple & Noise (max.)					
150mVp-p      200mVp-p					
Efficiency (typ.)					
89%      91%      92%      93%      93%					
Hold-up Time					
12 ms min.					
Switching Frequency					
75 kHz					
Protection	Over Power Protection				
	Auto recovery				
	Over Voltage Protection				
	Auto recovery				
Over Temperature					
Auto recovery					
Short Circuit Protection					
Auto-recovery					
Isolation	Input-Output (V.AC)				
	3000V				
	Input-FG (V.AC)				
1500V					
Output-FG (V.AC)					
500V					
Environment	Operating Temperature				
	-10°C...+70°C (with derating)				
	Storage Temperature				
	-25°C...+85°C				
	Temperature Coefficient				
	±0.03%/°C ( 0~50°C )				
Humidity					
95% RH					
MTBF					
>120,000 h @ 25°C (MIL-HDBK-217F)					
Vibration					
10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes.					

1. All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

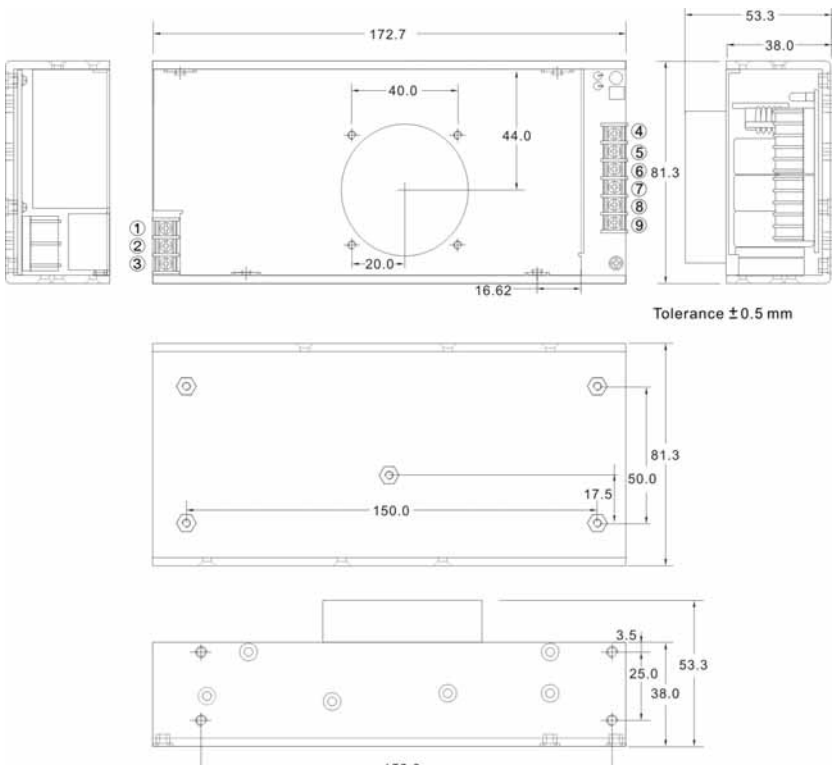


2. Ripple &amp; Noise are measured at 20MHz of bandwidth with 0.1uF &amp; 47uF parallel capacitor.

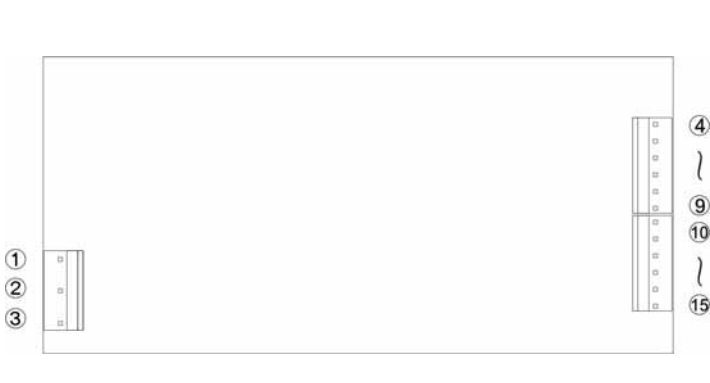


**ELECTRICAL SPECIFICATIONS**

Model No.		AQF360E-12S	AQF360E-24S	AQF360E-36S	AQF360E-48S	AQF360E-54S
Physical	Dimension (L x W x H)	6.8 x 3.2 x 2.1 Inches (172.7 x 81.3 x 53.3 mm) Tolerance $\pm 0.5$ mm				
	Weight	729 g				
	Cooling Method	Cooling by Built-in DC FAN				
Safety	Agency Approvals	CE, UL60950				
EMC	EMI (Conducted & Radiated Emission)	EN 55022 class B				
	EMS (Noise Immunity)	EN 55024				

1. All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.
2. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.

**MECHANICAL DIMENSION ( Top View )**

Standard													
	<table border="1"> <thead> <tr> <th style="background-color: #ffcc99;">PIN#</th> <th style="background-color: #ffcc99;">SINGLE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>FG</td> </tr> <tr> <td>2</td> <td>AC IN (N)</td> </tr> <tr> <td>3</td> <td>AC IN (L)</td> </tr> <tr> <td>4~6</td> <td>+DC OUT</td> </tr> <tr> <td>7~9</td> <td>-DC OUT</td> </tr> </tbody> </table> <div style="display: flex; justify-content: space-around; margin-top: 10px;">   </div>	PIN#	SINGLE	1	FG	2	AC IN (N)	3	AC IN (L)	4~6	+DC OUT	7~9	-DC OUT
PIN#	SINGLE												
1	FG												
2	AC IN (N)												
3	AC IN (L)												
4~6	+DC OUT												
7~9	-DC OUT												

A Type													
	<table border="1"> <thead> <tr> <th style="background-color: #ffcc99;">PIN#</th> <th style="background-color: #ffcc99;">SINGLE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>FG</td> </tr> <tr> <td>2</td> <td>AC IN (N)</td> </tr> <tr> <td>3</td> <td>AC IN (L)</td> </tr> <tr> <td>4~9</td> <td>+DC OUT</td> </tr> <tr> <td>10~15</td> <td>-DC OUT</td> </tr> </tbody> </table> <div style="display: flex; justify-content: space-around; margin-top: 10px;">   </div>	PIN#	SINGLE	1	FG	2	AC IN (N)	3	AC IN (L)	4~9	+DC OUT	10~15	-DC OUT
PIN#	SINGLE												
1	FG												
2	AC IN (N)												
3	AC IN (L)												
4~9	+DC OUT												
10~15	-DC OUT												

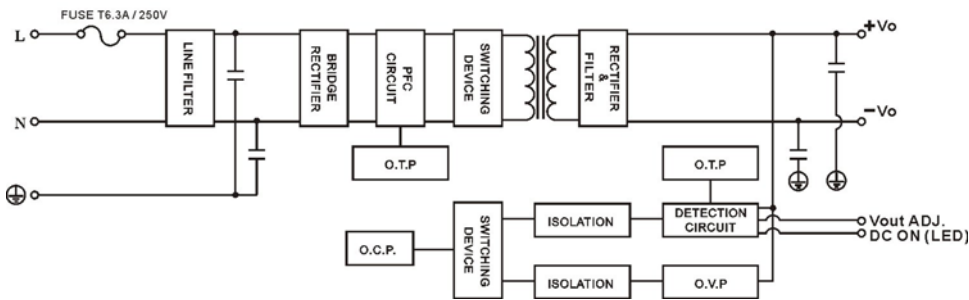
**ASSEMBLY INSTRUCTIONS**

\*U Case T=2.0mm

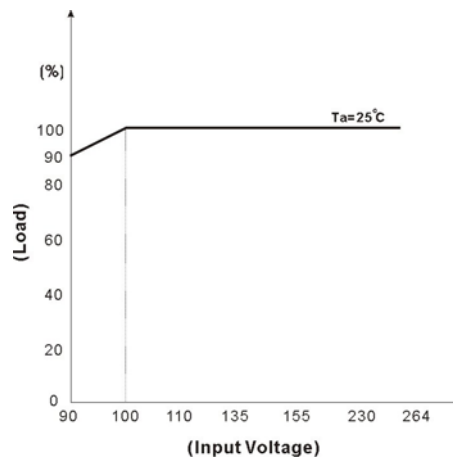
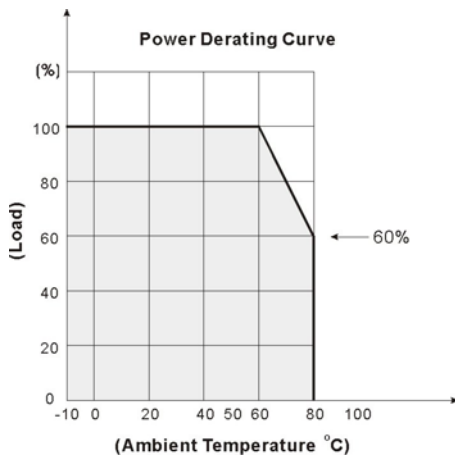
Customer screws into the length of the case no higher than 0.5mm  
(Namely screw length for load plate thickness plus 2.5mm)

**BLOCK DIAGRAM**

Single Output

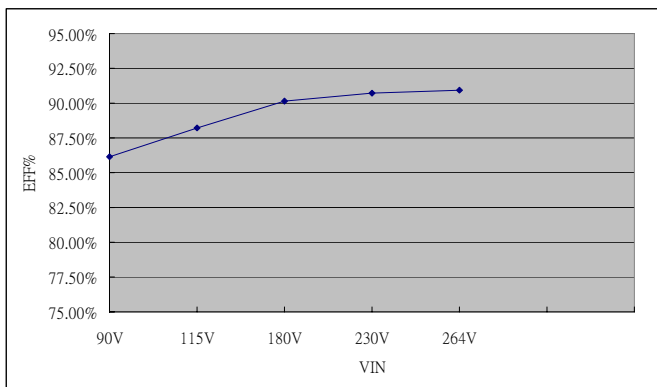


**DERATING**

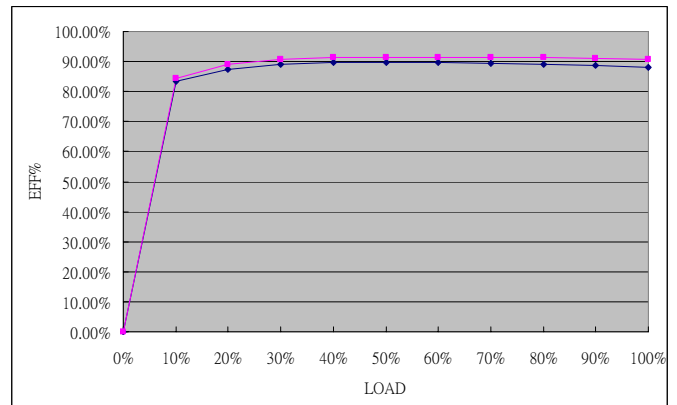


**EFFICIENCY VERSUS LOAD**
**AQF360E-12S**
**VIN VS Efficiency**

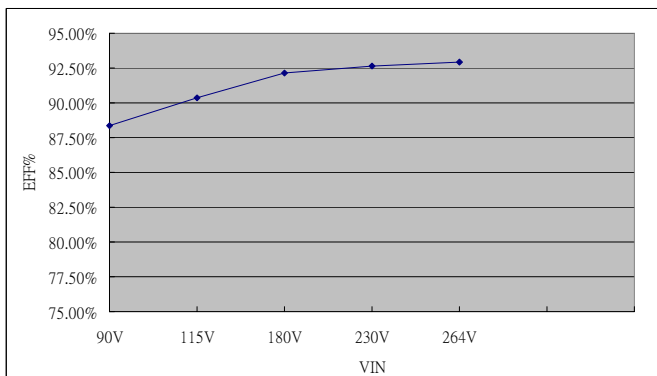
Input Voltage (V)	90	115	180	230	264
Efficiency (%)	86.12	88.20	90.15	90.69	90.95


**LOAD VS Efficiency**

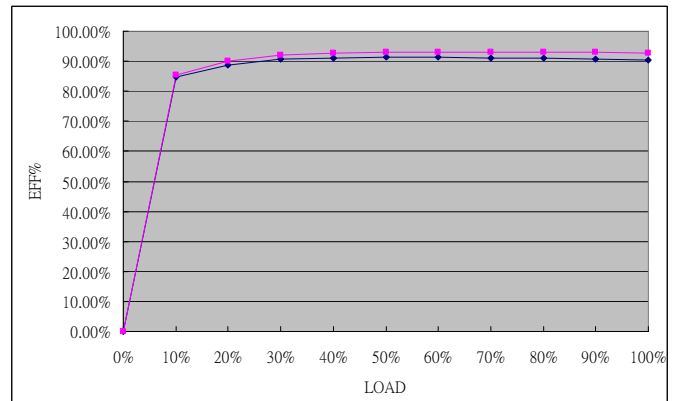
Load (%)	0	10	20	30	40	50
115V (%)	0	83.25	87.43	89.02	89.67	89.80
230V (%)	0	84.38	88.94	90.75	91.24	91.49
Load (%)	60	70	80	90	100	
115V (%)	89.64	89.39	89.00	88.65	88.20	
230V (%)	91.46	91.38	91.22	91.02	90.09	


**AQF360E-24S**
**VIN VS Efficiency**

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	88.36	90.35	92.13	92.67	92.96

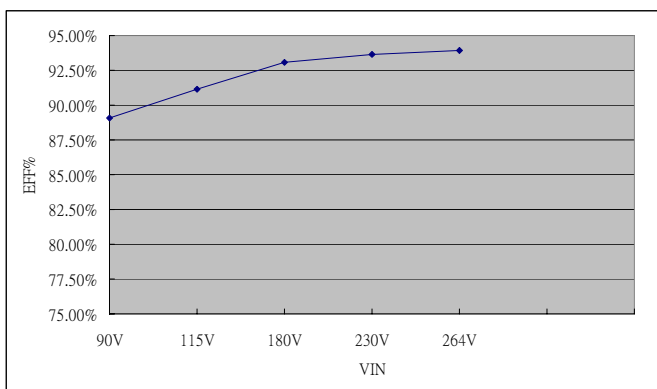

**LOAD VS Efficiency**

Load (%)	0	10	20	30	40	50
115V (%)	0	84.77	88.62	90.54	91.14	91.33
230V (%)	0	85.54	90.08	92.06	92.62	92.99
Load (%)	60	70	80	90	100	
115V (%)	91.32	91.18	90.98	90.70	90.35	
230V (%)	93.08	93.08	93.02	92.91	92.67	

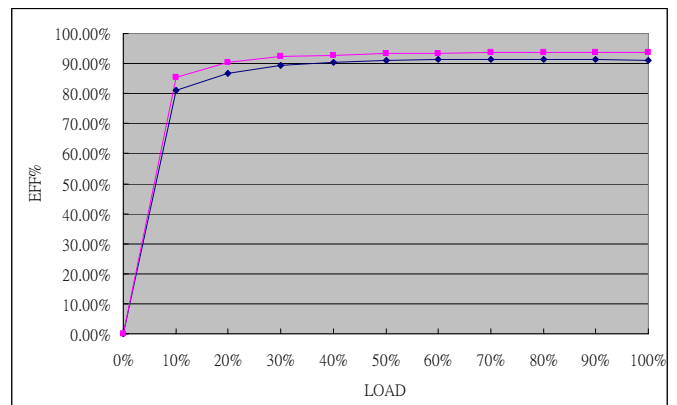


**EFFICIENCY VERSUS LOAD**
**AQF360E-36S**
**VIN VS Efficiency**

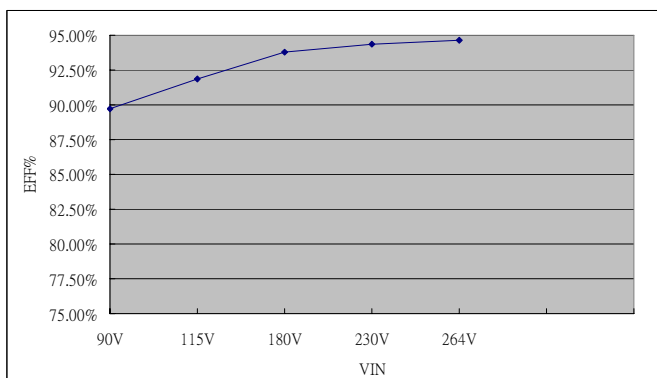
Input Voltage (V)	90	115	180	230	264
Efficiency (%)	89.04	91.17	93.06	93.64	93.93


**LOAD VS Efficiency**

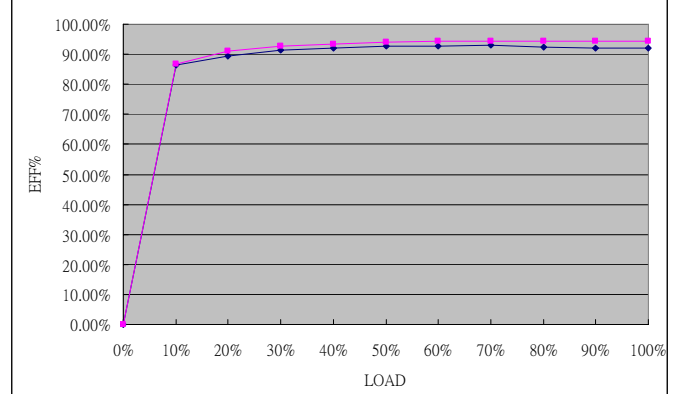
Load (%)	0	10	20	30	40	50
115V (%)	0	80.96	86.76	89.39	90.51	91.01
230V (%)	0	85.51	90.25	92.24	92.82	93.39
Load (%)	60	70	80	90	100	
115V (%)	91.21	91.36	91.37	91.31	91.17	
230V (%)	93.46	93.68	93.76	93.68	93.64	


**AQF360E-48S**
**VIN VS Efficiency**

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	89.75	91.89	93.79	94.36	94.67

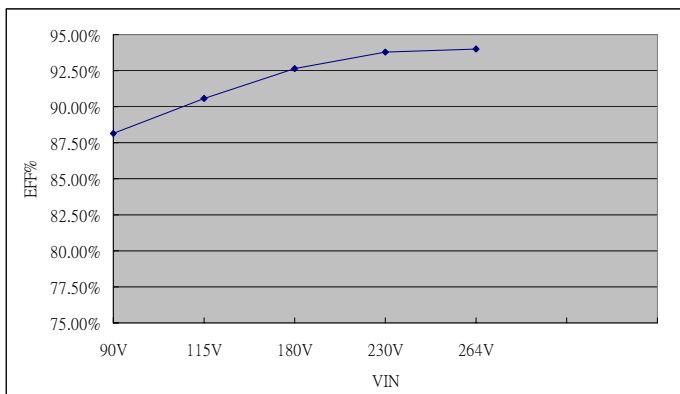

**LOAD VS Efficiency**

Load (%)	0	10	20	30	40	50
115V (%)	0	86.43	89.33	91.43	92.17	92.58
230V (%)	0	86.80	90.87	92.74	93.47	94.02
Load (%)	60	70	80	90	100	
115V (%)	92.58	93.00	92.38	92.18	91.89	
230V (%)	94.02	94.23	94.24	94.40	94.36	



**EFFICIENCY VERSUS LOAD**
**AQF360E-54S**
**VIN VS Efficiency**

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	88.12	90.58	92.65	93.79	93.99


**LOAD VS Efficiency**

Load (%)	0	10	20	30	40	50
115V (%)	0.00	86.37	88.87	89.82	90.28	90.91
230V (%)	0.00	88.59	91.67	92.80	93.35	93.66
Load (%)	60	70	80	90	100	
115V (%)	90.98	90.96	90.95	90.87	90.58	
230V (%)	93.79	93.83	93.86	93.80	93.79	

