


## DESCRIPTION

The IP102/A is a monolithic IC that includes two operational amplifiers, two comparators and an adjustable shunt regulator. This device is offering space and cost saving in many applications like power supply management or data acquisition systems.

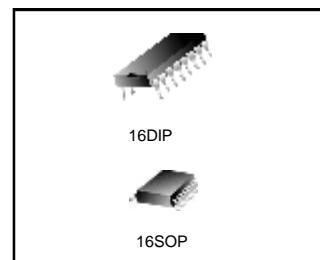

## FEATURES

### Operational Amplifiers

- Low Supply Current : 200uA/amp
- Medium Speed : 1.5MHz
- Low Level Output Voltage Close to VEE : 0.1V Typ.

### Comparators

- Low Supply Current : 200uA/amp( $V_{CC} = 5V$ )
- Low Output Saturation Voltage 0.1V ( $I_O = 4mA$ )


### Adjustable Shunt Regulator

- Adjustable Output Voltage :  $V_{ref}$  to 18V
- Sink Current Capability : 0.5 to 150mA
- 1% Voltage Precision
- Latch-up Immunity


## ORDERING INFORMATION

Device	Package	Operating Temp
IP102A	16DIP	-40°C ~ +85°C
IP102A	16SOP	

## BLOCK DIAGRAM

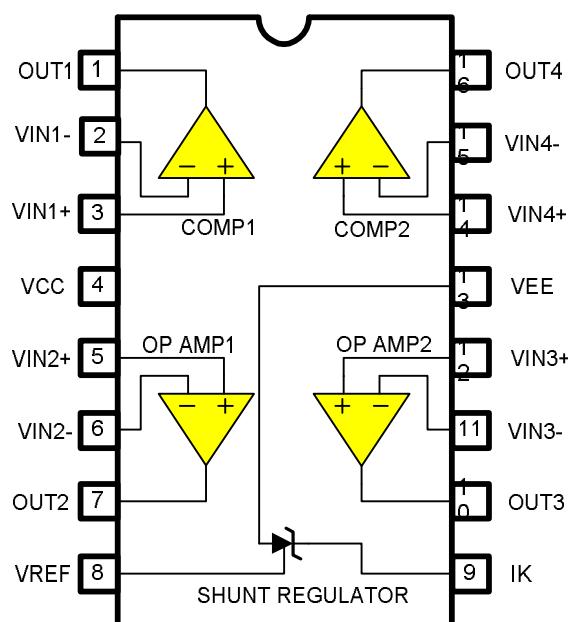

### PIN CONNECTIONS

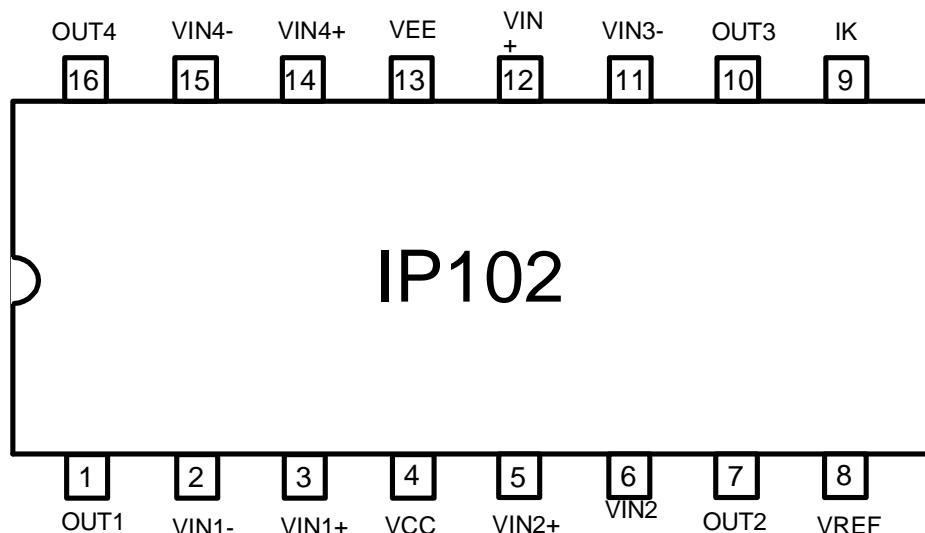

### PIN DESCRIPTIONS

NO	SYMBOL	I/O	DESCRIPTION
1	OUT1	O	Comparator 1 Output
2	VIN1-	I	Comparator 1 Inverting Input
3	VIN1+	I	Comparator 1 Non-Inverting Input
4	VCC	-	Positive Supply Voltage
5	VIN2+	I	OP-Amp 1 Non-Inverting Input
6	VIN2-	I	OP-Amp 1 Inverting Input
7	OUT2	O	OP-Amp 1 Output
8	VREF	-	Adjustable Shunt Regulator Voltage Reference
9	IK	I	Adjustable Shunt Regulator Cathode
10	OUT3	O	OP-Amp 2 Output
11	VIN3-	I	OP-Amp 2 Inverting Input
12	VIN3+	I	OP-Amp 2 Non-Inverting Input
13	VEE	-	Negative Supply Voltage
14	VIN4+	I	Comparator 2 Non-Inverting Input
15	VIN4-	I	Comparator 2 Inverting Input
16	OUT4	O	Comparator 2 Output

**ABSOLUTE MAXIMUM RATINGS**

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	Vcc	18	V
Operating temperature	Topr	-40 ~ +85	°C
Storage temperature	Tstg	-65 ~ 150	°C

**ELECTRICAL CHARACTERISTICS**


Ta = 25°C, Vcc = 5V, Vee = GND (unless otherwise specified. )

TOTAL SUPPLY VOLTAGE SECTION						
CHARACTERISTICS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Total Supply Current	Icc	Vee = 0V, No Load		0.8	1.5	mA
Operational Amplifiers						
Input Offset Voltage	Vio			1	4.5	mV
Input Offset Current	Iio				50	nA
Input Bias Current	lib			50	150	nA
Large Signal Voltage Gain	Avd	Vcc=15V, Vo=5~10V, Rload =10K	60	100		dB
Supply Voltage Rejection Ratio	SVRR	Vcc= 5V to 15V	65	100		dB
Common Mode Rejection Ratio	CMRR	Vcc=15V, Vicm=0~(Vcc)-1.8V	70	90		dB
Output Source Current	Isource	Vo=2.5V, Vid=+-1V	3	6		mA
Output Sink Current	Isink	Vo=2.5V, Vid=+-1V	3	6		mA
Phase Margin	PM	Rload=10K,Cload=100pF		55		Degree
Output Voltage High	Voh	Vcc=15V, Rload=10K	12	13		V
Output Voltage Low	Vol	Rload=10K		100	150	mV
Slew Rate	SR	Vi=10V, Vcc=12V,Rload=10K,Cloa d=100pF	0.5	0.75		V/us
Gain Bandwidth	GB	Rload=10K,Cload=100pF,f =100khz	1.0	1.5		MHz
Total Harmonic Distortion	THD			0.05		%

### ELECTRICAL CHARACTERISTICS

T<sub>a</sub> = 25°C, V<sub>CC</sub> = 5V, V<sub>EE</sub>=GND (unless otherwise specified. )

Comparators						
CHARACTERISTICS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	V <sub>IO</sub>				5	mV
Input Offset Current	I <sub>IO</sub>				50	nA
Input Bias Current	I <sub>IB</sub>				200	nA
High Level Output Current	I <sub>OH</sub>	V <sub>ID</sub> = +1V, V <sub>CC</sub> =V <sub>O</sub> =15V		0.1	1	uA
Large Signal Voltage Gain	A <sub>VD</sub>	V <sub>CC</sub> =+15V, R <sub>LOAD</sub> =15K, V <sub>O</sub> =1V to 11V		200		V/mV
Low Level Output Voltage	V <sub>OL</sub>	V <sub>ID</sub> = -1V, I <sub>SC</sub> = 4mA		100	400	mV
Output Sink Current	I <sub>SC</sub>	V <sub>ID</sub> = -1V, V <sub>O</sub> = 1.5V	6	16		mA
Input Common Mode Voltage Range	V <sub>ICM</sub>		0		(V <sub>CC</sub> ) - 1.5	V
Differential Input Voltage	V <sub>ID</sub>				V <sub>CC</sub>	V
Adjustable Shunt Regulator						
Cathode to Anode Voltage	V <sub>KA</sub>		V <sub>REF</sub>		18	V
Cathode Current	I <sub>K</sub>		0.5		150	mA
Reference Input Voltage	V <sub>REF</sub>	IP102	2.475	2.5	2.525	V
Reference Input Voltage Deviation	dV <sub>REF</sub>	V <sub>KA</sub> =V <sub>REF</sub> , I <sub>K</sub> =10mA -40°C < T <sub>a</sub> < 85°C		7	30	mV
Load Regulation	R <sub>LOAD</sub>	V <sub>KA</sub> =V <sub>REF</sub> , I <sub>K</sub> =10mA~100mA		20	50	mV
Minimum Cathode Current for Regulation	I <sub>MIN</sub>	V <sub>KA</sub> = V <sub>REF</sub>		0.2	0.5	mA
Off-State Cathode Current	I <sub>OFF</sub>	V <sub>KA</sub> =18V, V <sub>REF</sub> =0V		0.1	1	uA

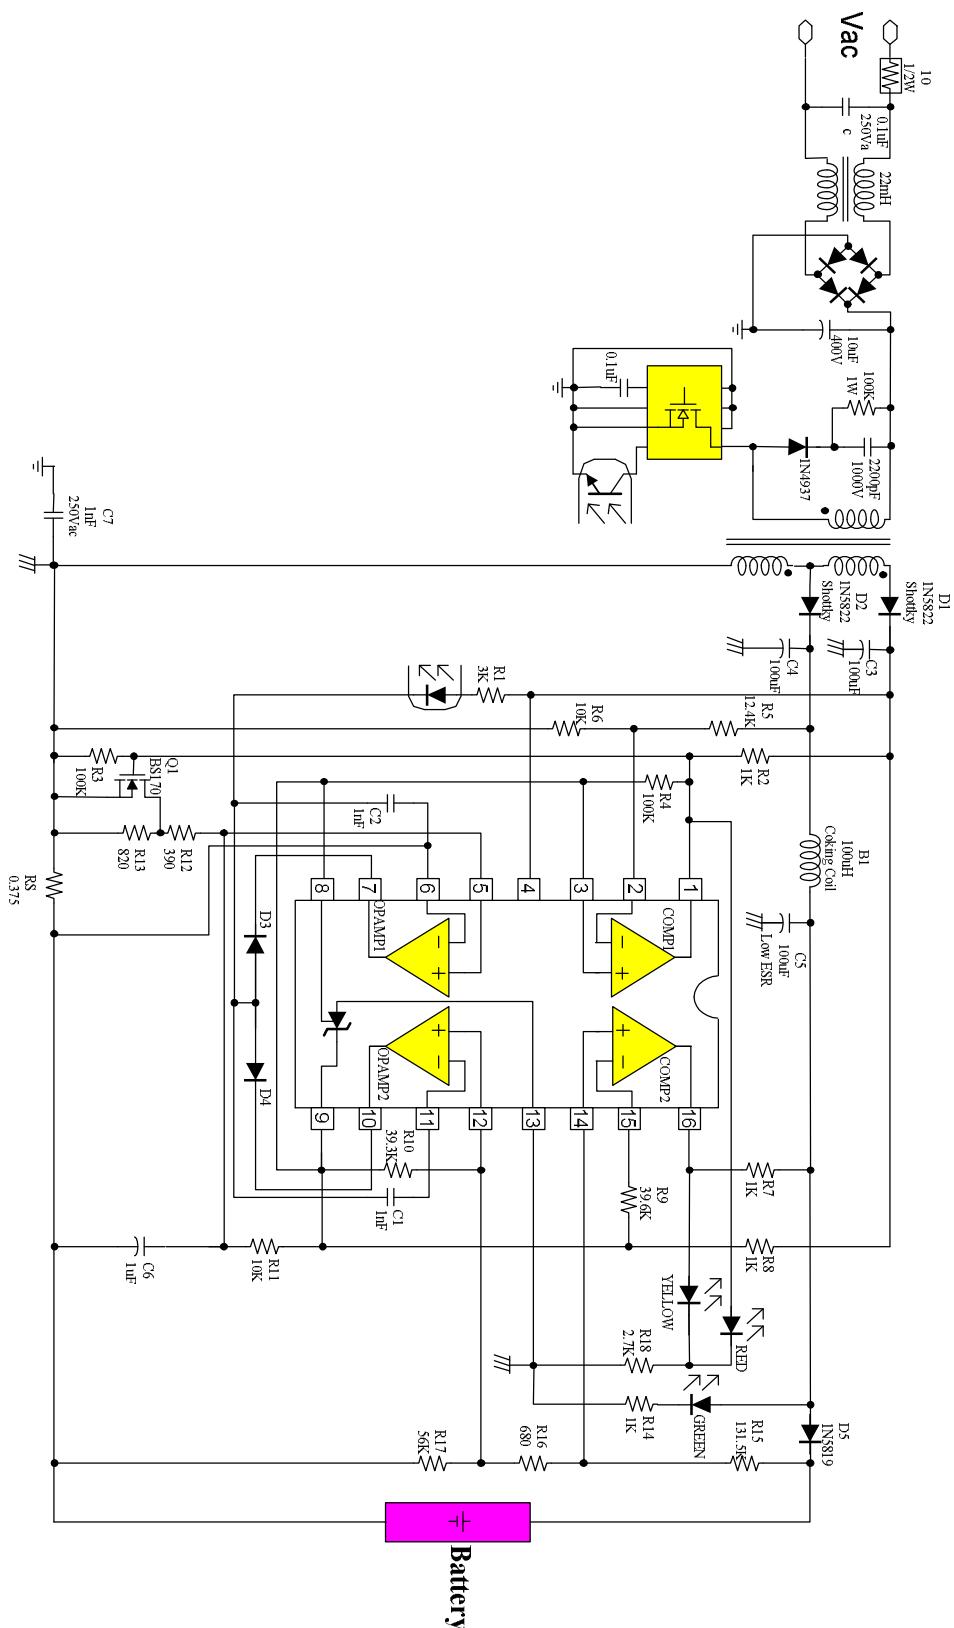**TYPICAL APPLICATION**


**ELECTRICAL DIAGRAMS**

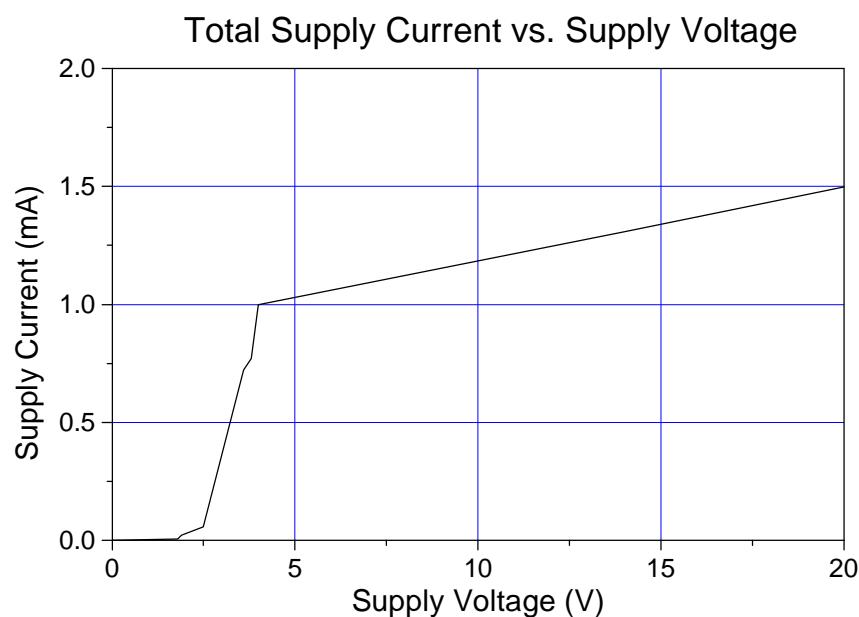


Fig.1 : Total Supply Current vs. Supply Voltage

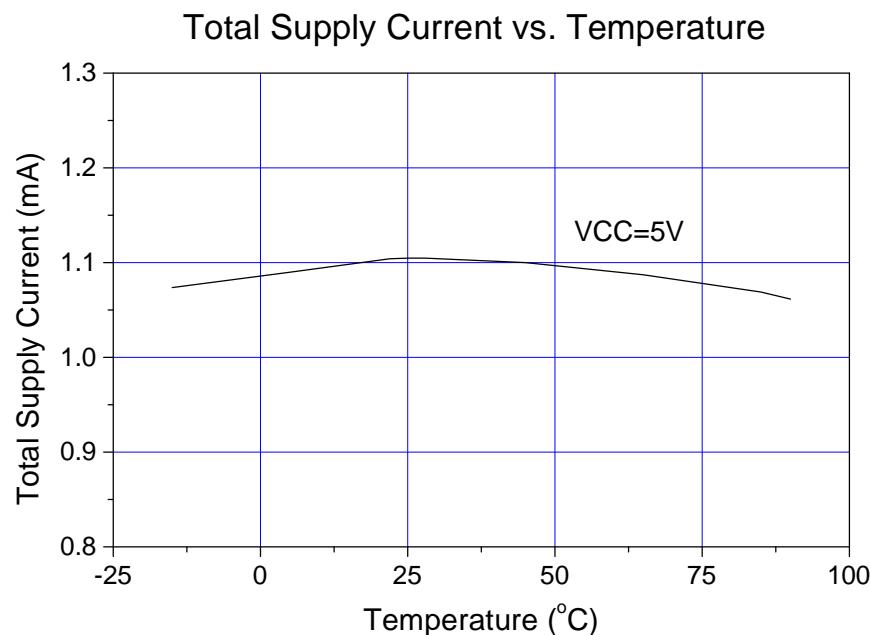


Fig.2 : Total Supply Current vs. Temperature

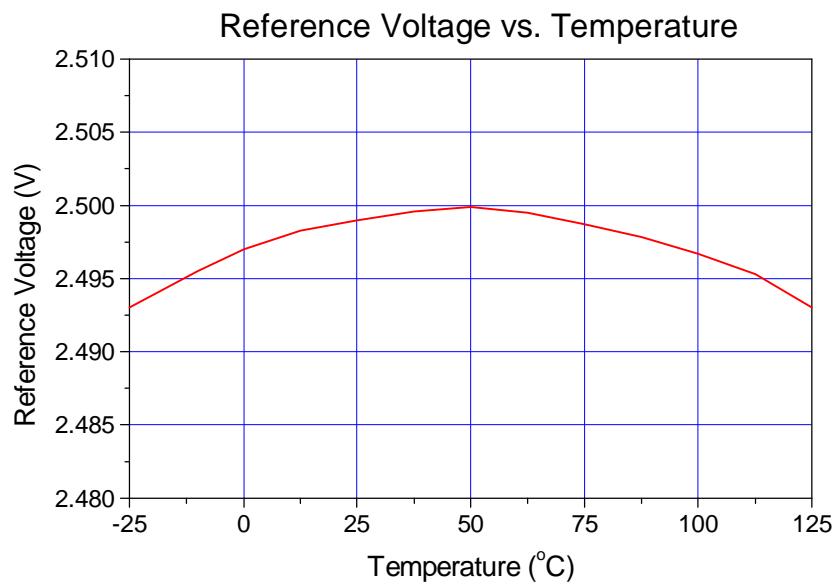


Fig.3 : Reference Voltage vs. Temperature

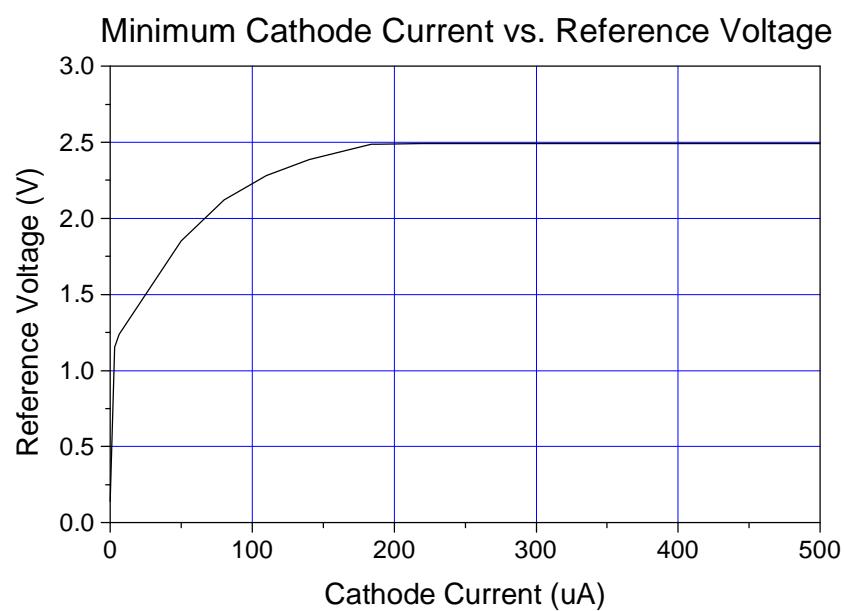


Fig.4 : Minimum Cathode Current VS. Reference Voltage

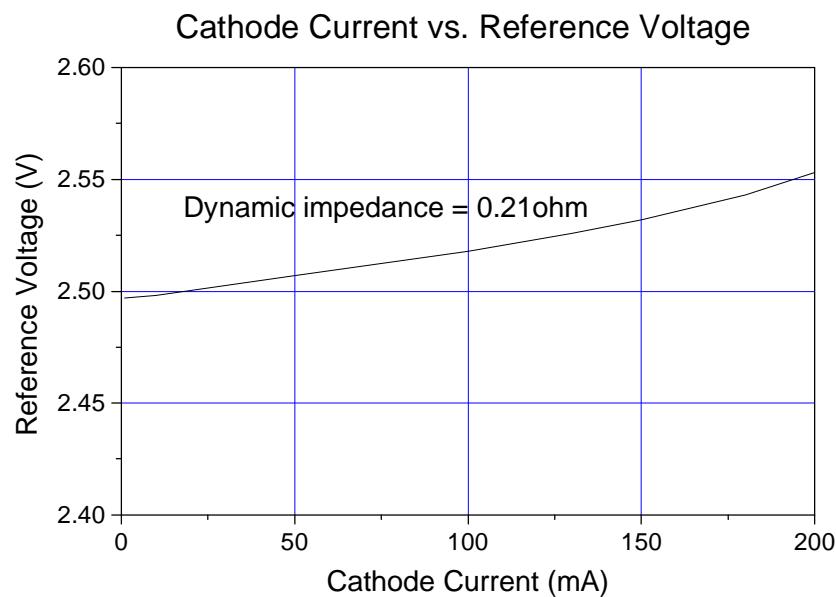


Fig.5 : Cathode Current vs. Reference Voltage

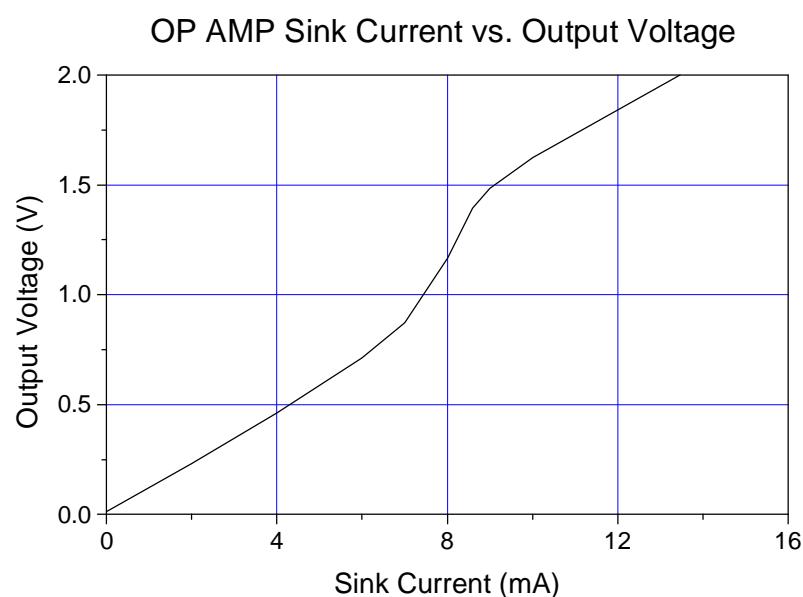


Fig.6 : OP AMP Sink Current vs. Output Voltage

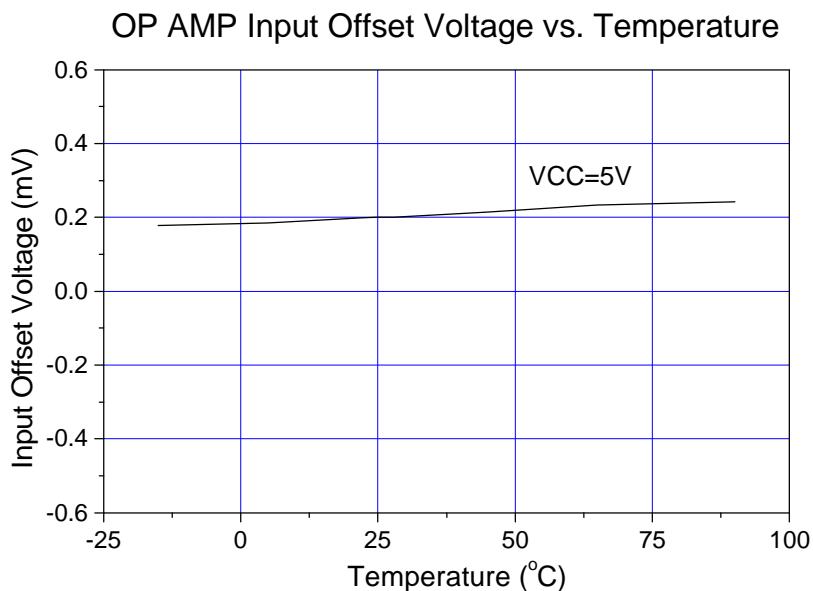


Fig.7 : OP AMP Input Offset Voltage vs. Temperature

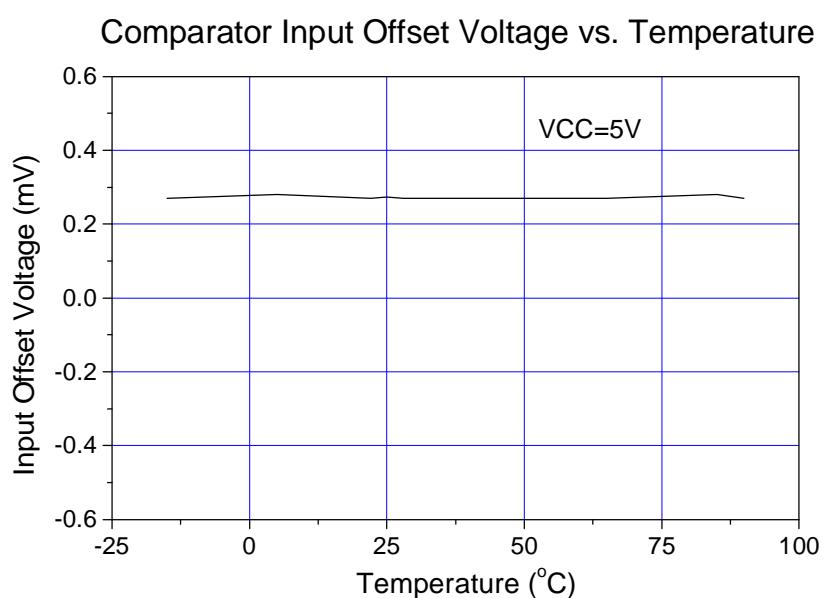


Fig.8 : Comparator Input Offset Voltage vs. Temperature


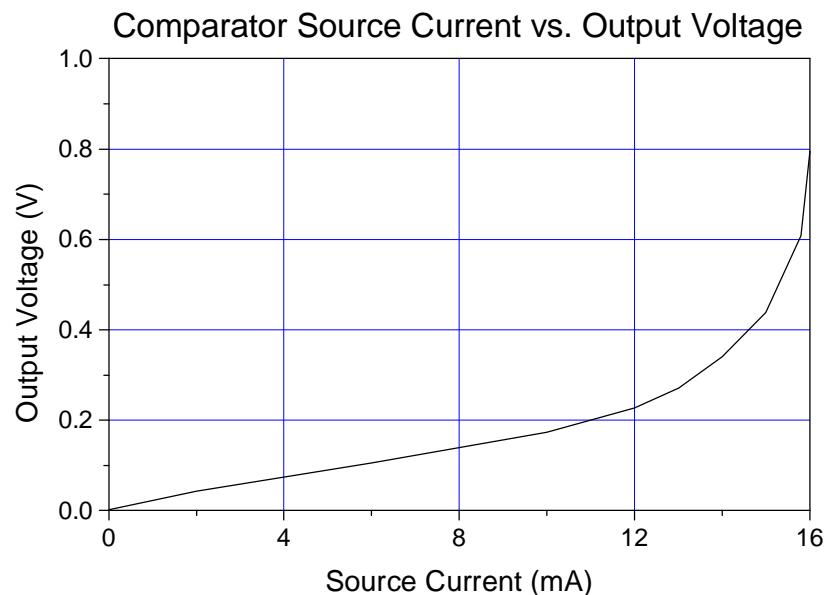


Fig.9 : Comparator Source Current vs. Output Voltage

**PACKAGE DIMENSION**
**16-DIP**


**PACKAGE DIMENSION**

**16-SOP**

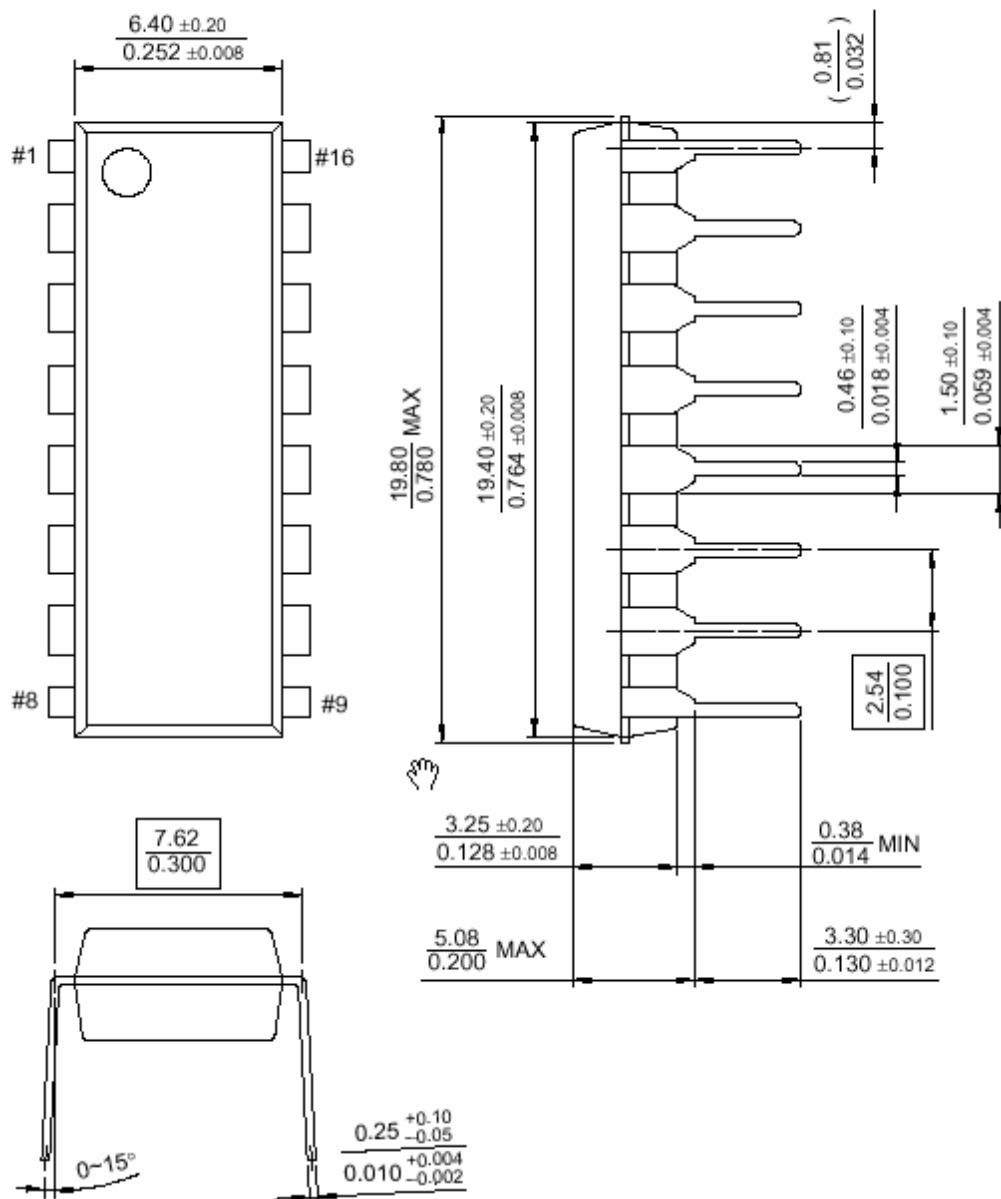