


used for: D-SUB

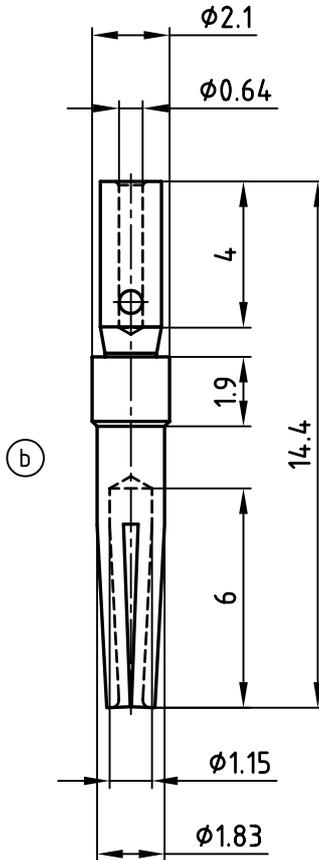

**Notes:**

- Material: brass
- Finish: hard-gold-plated in the contact area
- Temperature range:  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- Rated current: 5.0A
- Contact resistance:  $\leq 10\text{m}\Omega$

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.  
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH  
 DO NOT ALTER CAD DRAWING BY HAND

tolerance			 dim. in mm		
2003	date	name	title: <b>CRIMP SOCKET CONTACT</b> screw machined version accepts cable AWG 28-24		
drawn	14.02.	Parei			
appd.	14.02.	Kühle			
norm					
d-old					
1 x b	Ä 2127	02.12.2004	Lehmen	dwg no: AutoCAD 2000 <b>16K1A886</b> part no: <b>162A18719X</b>	
rev.	description	date	name		



scale: 5:1		material: SEE NOTES	
title:		dwg no: AutoCAD 2000 <b>16K1A886</b> part no: <b>162A18719X</b>	
DIN-A		sh: 1/1	