

Product Preview

Low Voltage 1:4 CMOS Clock Buffer

The MPC94551 is a CMOS 1:4 fanout buffer. The MPC94551 is ideal for applications requiring lower voltage.

Features

- 1:4 CMOS fanout buffer
- 250 ps output to output skew
- I/O frequency up to 160 MHz operation
- Non-inverting output clock
- 3.3 V supply voltage
- Output Enable mode tri-states outputs
- -40°C to 85°C industrial temperature range
- Standard 8-lead SOIC package

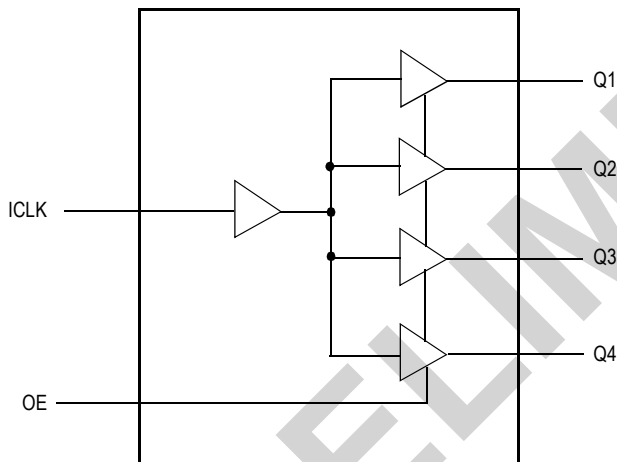


Figure 1. Logic Diagram

MPC94551

1:4 LVCMOS CLOCK BUFFER



D SUFFIX
8-LEAD SOIC PACKAGE
CASE 751-06

ORDERING INFORMATION

Device	Package
MPC94551D	SO-8
MPC94551DR2	SO-8

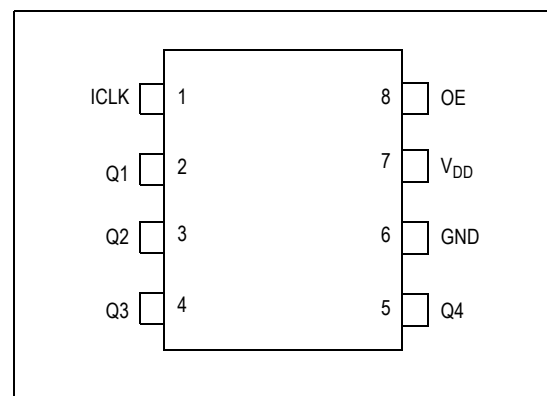


Figure 2. Pin Assignment

This document contains certain information on a new product. Specifications and information herein are subject to change without notice.

© Motorola, Inc. 2004



For More Information On This Product,
Go to: www.freescale.com

Table 1. Pin Description

Pin Number	Pin Name	Pin Type	Pin Description
1	ICLK	Input	Clock input, internal pull-up resistor
2	Q1	Output	Clock output ¹
3	Q2	Output	Clock output ¹
4	Q3	Output	Clock output ¹
5	Q4	Output	Clock output ¹
6	GND	Power	Connect to ground ²
7	V _{DD}	Power	Connect to 3.3 V ²
8	OE	Input	Output enable, tri-states outputs when low, internal pull-up resistor

1. A 33 Ω series terminating resistor may be used on each clock output if the trace is longer than 1 inch.
2. A decoupling capacitor of 0.01 μ F should be connected between V_{DD} on pin 7 and GND on pin 6, as close to the device as possible.

Table 2. Absolute Maximum Ratings¹

Parameter	Rating	Unit
Power Supply Voltage, V _{DD}	3.9	V
All Inputs and Outputs	-0.5 to V _{DD} +0.5	V
Ambient Operating Temperature	-40 to +85	°C
Storage Temperature	-65 to +150	°C
Junction Temperature	175	°C
Soldering Temperature	260	°C

1. Stresses above the ratings listed below can cause permanent damage to the device. These ratings are stress ratings only. Functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods can affect product reliability. Electrical parameters are guaranteed only over the recommended operating temperature range.

Table 3. Recommended Operation Conditions

Parameter	Min	Typ	Max	Unit
Ambient Operating Temperature	-40		+85	°C
Power Supply Voltage (measured in respect to GND)	+3.135		+3.465	V

Table 4. DC Characteristics ($V_{DD} = 3.3\text{ V} \pm 5\%$; Ambient Temperature = -40°C to 85°C)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Operating Voltage	V_{DD}		3.15		3.45	V
Input High Voltage ¹ , ICLK	V_{IH}		$V_{DD}/2 + 0.7$		3.8	V
Input Low Voltage ¹ , ICLK	V_{IL}				$V_{DD}/2 - 0.7$	V
Input High Voltage, OE	V_{IH}		2		V_{DD}	V
Input Low Voltage, OE	V_{IL}				0.8	V
Output High Voltage	V_{OH}	$I_{OH} = -25\text{ mA}$	2.4			V
Output Low Voltage	V_{OL}	$I_{OL} = 25\text{ mA}$			0.4	V
Output High Voltage (CMOS Level)	V_{OH}	$I_{OH} = -12\text{ mA}$	$V_{DD} - 0.4$			V
Operating Supply Current	I_{DD}	No load, 135 MHz		18		mA
Nominal Output Impedance	Z_O			20		W
Internal Pull-up Resistor	R_{PU}	ICLK		30		k Ω
Input Capacitance	C_{IN}	OE pin		5		pF
	C_{IN}	ICLK		TBD		pF
Short Circuit Current	I_{OS}			± 50		mA

1. Nominal switching threshold is $V_{DD}/2$.

Table 5. AC Characteristics ($V_{DD} = 3.3\text{ V} \pm 5\%$; Ambient Temperature = -40°C to 85°C)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Input Frequency			0		160	MHz
Output Frequency ¹		15 pF load			160	MHz
Output Clock Rise Time	t_{OR}	0.8 V to 2.0 V			1.5	ns
Output Clock Fall Time	t_{OF}	2.0 V to 0.8 V			1.5	ns
Propagation Delay ²		135 MHz	2	4	8	ns
Output to Output Skew ³		Rising edges at $V_{DD}/2$			250	ps


1. Measured with an external series resistor of 33 Ω positioned close to each output pin

2. Measured with rail to rail input clock

3. Measured between any 2 outputs with equal loading

Freescale Semiconductor, Inc.

PACKAGE DIMENSIONS

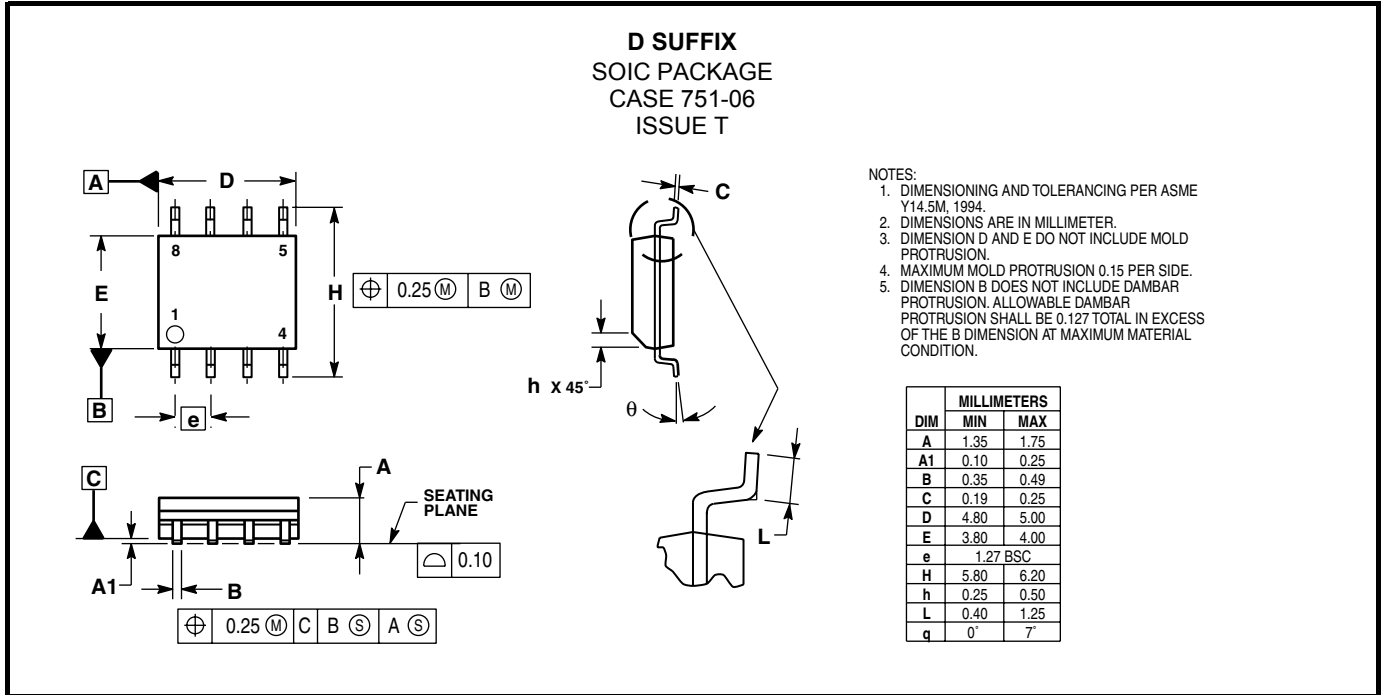

Information in this document is provided solely to enable system and software implementers to use Motorola products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part.

MOTOROLA and the Stylized M Logo are registered in the US Patent and Trademark Office. All other product or service names are the property of their respective owners.

© Motorola, Inc. 2004

HOW TO REACH US:

USA/EUROPE/LOCATIONS NOT LISTED:
Motorola Literature Distribution
P.O. Box 5405, Denver, Colorado 80217
1-800-521-6274 or 480-768-2130

JAPAN: Motorola Japan Ltd.; SPS, Technical Information Center
3-20-1 Minami-Azabu, Minato-ku, Tokyo 106-8573, Japan
81-3-3440-3569

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre
2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong
852-26668334

HOME PAGE: <http://motorola.com/semiconductors>



MPC94551

**For More Information On This Product,
Go to: www.freescale.com**

Freescale Semiconductor, Inc.