

25A Single-phase Glass-passivated Bridge Rectifier


Voltage Range 50 to 1000 Volts

FEATURES

- UL Recognized File # E-96005
- Glass passivated junction
- Ideal for printed circuit board
- Reliable low cost construction
- Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- Surge overload rating to 300 amperes peak
- High case dielectric strength of 2000 V_{RMS}

MECHANICAL DATA

- Case: Molded plastic
- Terminals: Leads solderable per MIL-STD-750, method 2026
- Weight: 0.3 ounce, 8 grams
- Mounting torque: 8.17 in. lbs. max.

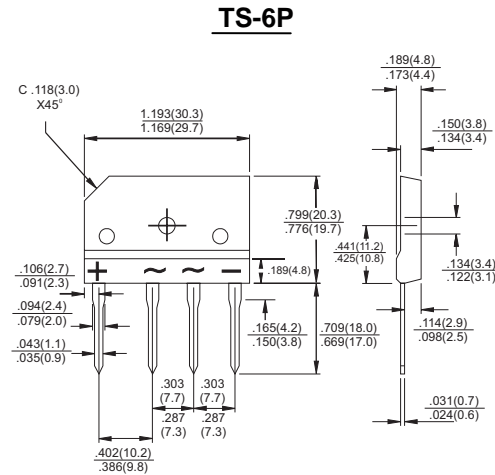

Dimensions in inches and (millimeters)

RoHS compliant.

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Parameter	Symbol	TS25P 01G	TS25P 02G	TS25P 03G	TS25P 04G	TS25P 05G	TS25P 06G	TS25P 07G	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current See Fig. 1	I _(AV)	25.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	300							A
Maximum Instantaneous Forward Voltage @25A	V _F	1.1							V
Maximum DC Reverse Current @ T _A =25°C at Rated DC Blocking Voltage @ T _A =125°C	I _R	10.0 500							uA uA
Typical Thermal Resistance (Note)	R _{θJC}	0.6							°C/W
Operating Temperature Range	T _J	-55 to +150							°C
Storage Temperature Range	T _{STG}	-55 to + 150							°C

Note: Thermal resistance from junction to case with device mounted on 5" x 7" x 0.25" Al-plate heatsink.

RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

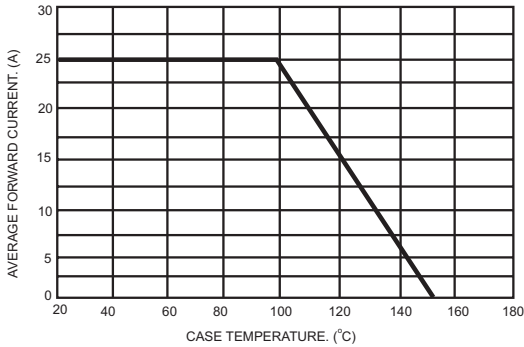


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

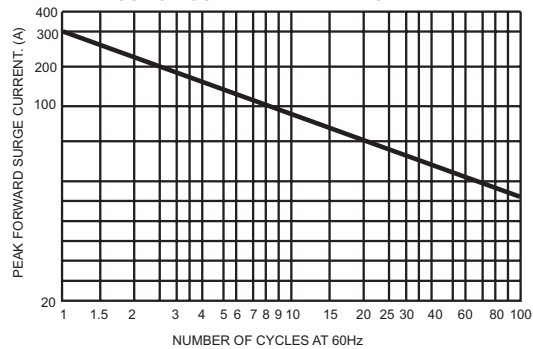


FIG.3- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT


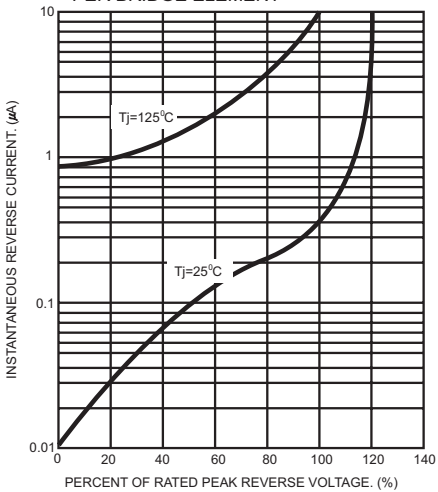


FIG.4- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

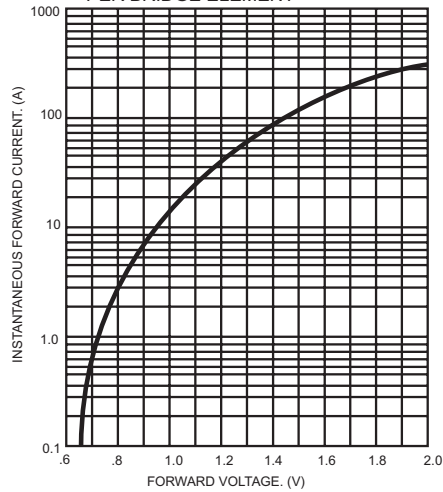

Information furnished by Silicon Standard Corporation is believed to be accurate and reliable. However, Silicon Standard Corporation makes no guarantee or warranty, express or implied, as to the reliability, accuracy, timeliness or completeness of such information and assumes no responsibility for its use, or for infringement of any patent or other intellectual property rights of third parties that www.DataSheet4U.com use. Silicon Standard reserves the right to make changes as it deems necessary to any products described herein for any reason, including without limitation enhancement in reliability, functionality or design. No license is granted, whether expressly or by implication, in relation to the use of any products described herein or to the use of any information provided herein, under any patent or other intellectual property rights of Silicon Standard Corporation or any third parties.