




- FEATURES**
- Metal-Semiconductor junction with guard ring
 - Epitaxial construction
 - Low forward voltage drop, low switching losses
 - High surge capability
 - For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
 - The plastic material carries U/L recognition 94V-0

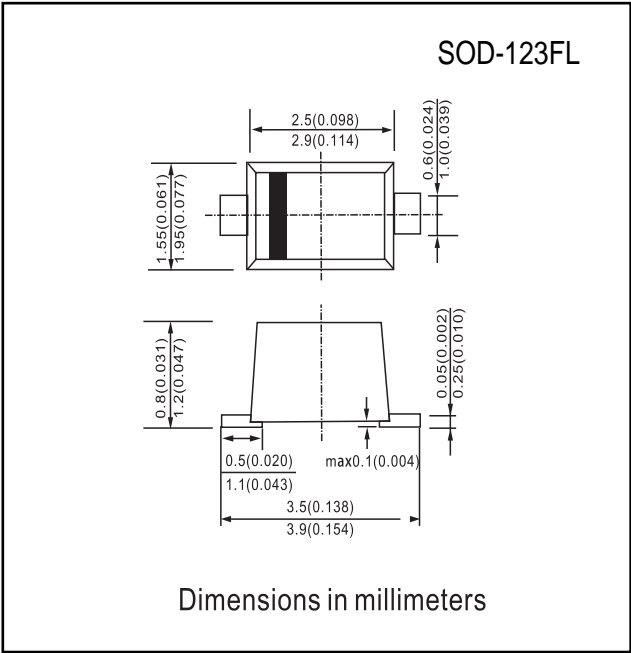

Mechanical Data

Case: JEDEC SOD-123FL, molded plastic
 Terminals: Solderable per MIL-STD-202, method 208
 Polarity: Color band denotes cathode
 Weight: 0.0008 ounces, 0.22 grams
 Mounting position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		SX5817	SX5818	SX5819	UNITS
Device marking code		S2	S3	S4	
Maximum recurrent peak reverse voltage	V_{RRM}	20	30	40	V
Maximum RMS voltage	V_{RMS}	14	21	28	V
Maximum DC blocking voltage	V_{DC}	20	30	40	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	1.0			A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=70^\circ C$	I_{FSM}	25.0			A
Maximum instantaneous forward voltage @ 1.0A (Note 1) @ 3.0A	V_F	0.45	0.55	0.60	V
		0.75	0.875	0.90	
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	I_R	1.0			mA
		10.0			
Typical junction capacitance (Note2)	C_J	110			pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	50			°C/W
Operating junction temperature range	T_J	- 55 ---- + 125			°C
Storage temperature range	T_{STG}	- 55 ---- + 150			°C

NOTE: 1. Pulse test : 300 μs pulse width, 1% duty cycle.
 2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 3. Thermal resistance junction to ambient



RATINGS AND CHARACTERISTIC CURVES SX5817 THRU SX5819

FIG.1 – FORWARD DERATING CURVE

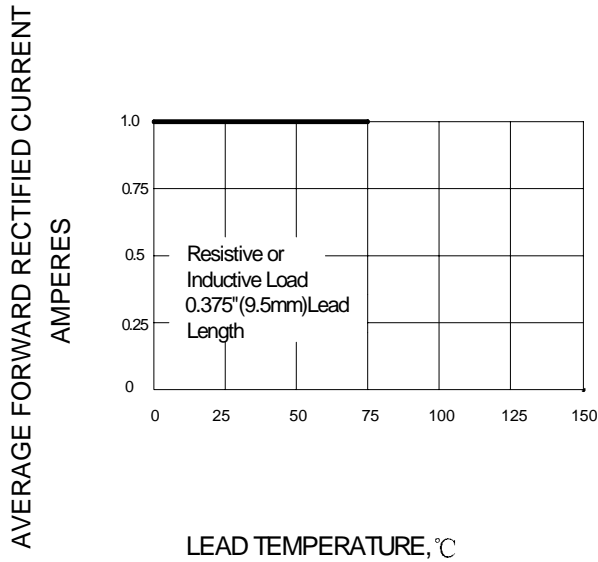


FIG.2 – PEAK FORWARD SURGE CURRENT

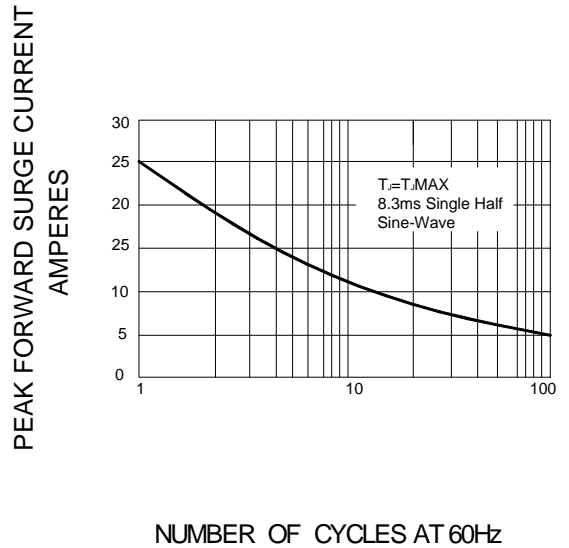


FIG.3 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

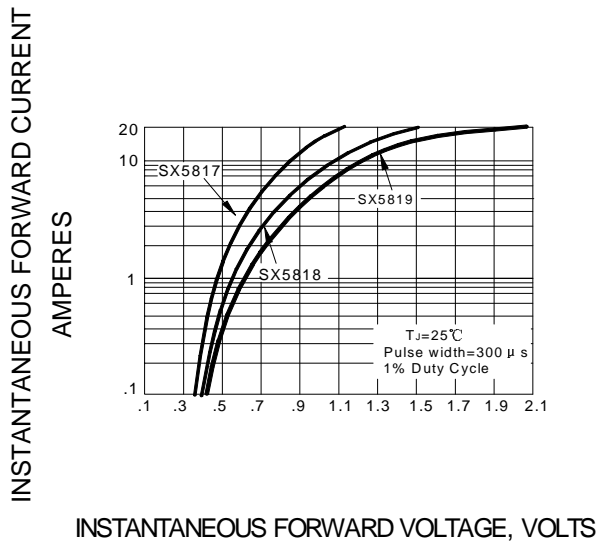


FIG.4 – TYPICAL JUNCTION CAPACITANCE

