

# Am110/210/310

## Voltage Follower

### Distinctive Characteristics

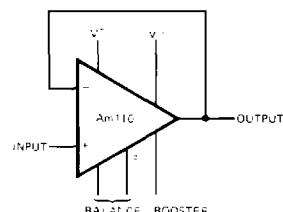
- The Am110/210/310 are functionally, electrically, and pin-for-pin equivalent to the National LM 110/210/310
- Slew rate: 30V/ $\mu$ s
- Small signal bandwidth: 20 MHz
- Input current: 10 nA max. over temperature
- Supply voltage range:  $\pm 5V$  to  $\pm 18V$

- 100% reliability assurance testing in compliance with MIL STD 883.
- Electrically tested and optically inspected dice for hybrid manufacturers.
- Available in metal can, hermetic dual-in-line or hermetic flat packages.

### FUNCTIONAL DESCRIPTION

The Am110/210/310 are voltage followers featuring high-speed, low-input currents and large input voltage range. They are internally compensated with provision for external offset adjustment. Operation over wide supply voltages and temperature is possible.


### FUNCTIONAL DIAGRAM



LIC-676

### TYPICAL APPLICATION
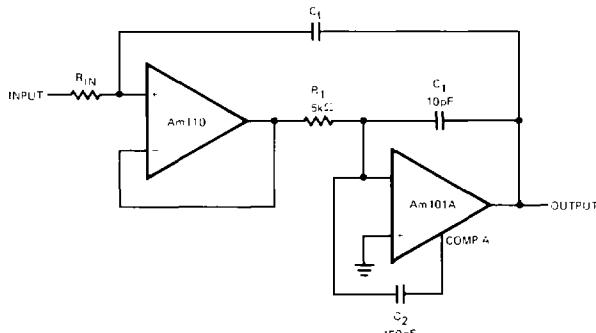
#### Fast Integrator With Low-Input Current




LIC-677

### ORDERING INFORMATION

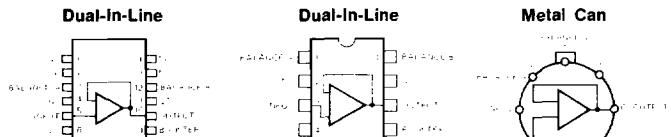
Part Number	Package Type	Temperature Range	Order Number
Am310	TO-99	0°C to +70°C	LM310H
	DIP	0°C to +70°C	LM310D
	Flat Package	0°C to +70°C	LM310F
	Molded DIP	0°C to +70°C	LM310N
	Dice	0°C to +70°C	LD310
Am210	TO-99	-25°C to +85°C	LM210H
	DIP	-25°C to +85°C	LM210D
	Flat Pak	-25°C to +85°C	LM210F
Am110	TO-99	-55°C to +125°C	LM110H
	DIP	-55°C to +125°C	LM110D
	Flat Package	-55°C to +125°C	LM110F
	Dice	-55°C to +125°C	LD110

### CONNECTION DIAGRAMS

#### Top Views



#### Flat Package

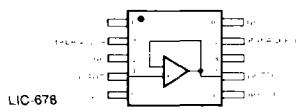

LIC-678

#### NOTES:

- (1) On Metal Can, pin 4 is connected to case.
- (2) On DIP, pin 6 is connected to bottom of package.
- (3) On Flat Package, pin 5 is connected to bottom of package.

**MAXIMUM RATINGS**

Supply Voltage	±18 V		
Internal Power Dissipation (Note 1)	500 mW		
Input Voltage (Note 2)	±15 V		
Output Short-Circuit Duration (Note 3)	Indefinite		
Operating Temperature Range Am110	−55°C to +125°C		
Am210	−25°C to +85°C		
Am310	0°C to +70°C		
Storage Temperature Range	−65°C to +150°C		
Lead Temperature (soldering, 60 sec)	300°C		

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise specified) (Note 4)**Am110  
Am210**

Parameter (see definitions)	Conditions	Am310	Am110	Am210	Units	
Min	Typ	Max	Min	Typ	Max	Units
Input Offset Voltage		2.5	7.5	1.5	4.0	mV
Input Bias Current		2.0	7.0	1.0	3.0	nA
Input Resistance	10 <sup>4</sup>	10 <sup>5</sup>	10 <sup>4</sup>	10 <sup>5</sup>		MΩ
Input Capacitance		1.5		1.5		pF
Large-Signal Voltage Gain	$R_L = 8 \text{ k}\Omega, V_{out} = \pm 10 \text{ V}, V_S = \pm 15 \text{ V}$	0.999	0.9999	0.999	0.9999	V/V
Output Resistance		0.75	2.5	0.75	2.5	Ω
Supply Current		3.9	5.5	3.9	5.5	mA
Slew Rate	$V_S = \pm 15 \text{ V}, V_{IN} = \pm 10 \text{ V}, R_L = 10 \text{ k}\Omega$	30		20	30	V/μs

**The Following Specifications Apply Over The Operating Temperature Ranges**

Input Offset Voltage		10.0		6.0	mV
Input Bias Current		10.0		10.0	nA
Large-Signal Voltage Gain	$R_L = 10 \text{ k}\Omega, V_{out} = \pm 10 \text{ V}, V_S = \pm 15 \text{ V}$	0.999	0.999		V/V
Output Voltage Swing (Note 5)	$R_L = 10 \text{ k}\Omega, V_S = \pm 15 \text{ V}$	±10	±10		V
Supply Current	$T_A = +125^\circ\text{C}$			2.0	4.0 mA
Supply Voltage Rejection Ratio	$\pm 5 \text{ V} \leq V_S \leq \pm 18 \text{ V}$	70	70		dB
Average Temperature Coefficient of Input Offset Voltage	$0^\circ \leq T_A \leq 70^\circ\text{C}$ $-55^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$ $+85^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$	10		6	μV/°C
				12	

Notes: 1. Derate Metal Can package 6.8 mW/°C for operation at ambient temperatures above 75°C, the Dual In-Line at 9 mW/°C for operation at ambient temperatures above 95°C, and the Flat Packages at 5.4 mW/°C for operation at ambient temperatures above 57°C.

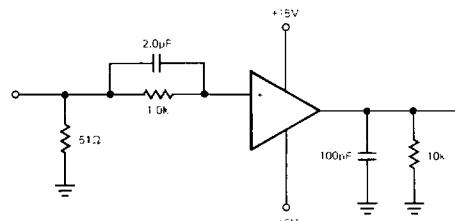
2. For supply voltages less than ±15 V, the maximum input voltage is equal to the supply voltage.

3. To prevent damage when the output is shorted, it is necessary to insert a resistor larger than 2 kΩ in series with the input. Continuous short circuit is allowed for case temperatures to 125°C and ambient temperatures to 70°C for the 110/210. For 310, the corresponding temperatures are 70°C and 55°C respectively.













4. Unless otherwise specified, these specifications apply for supply voltages from ±5 to ±18 V.

5. Greater output voltage swing can be obtained by connecting a resistor from booster terminal to V<sub>-</sub>.

6


**AC TEST CIRCUIT**

## PERFORMANCE CURVES

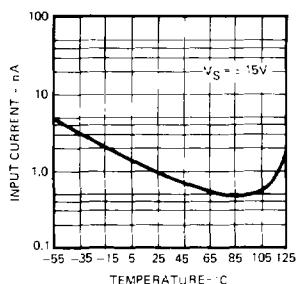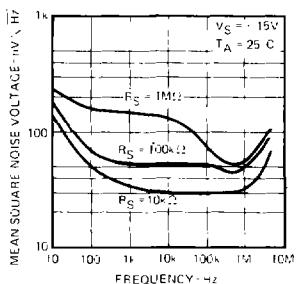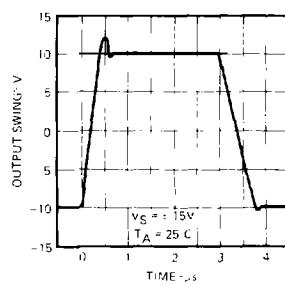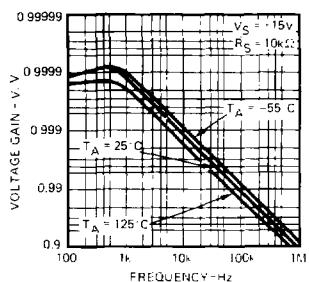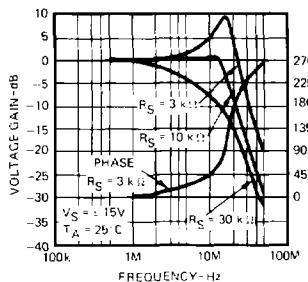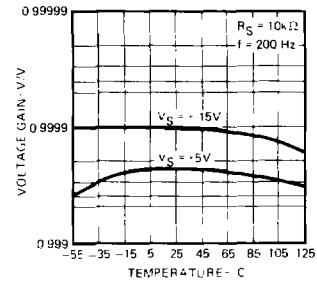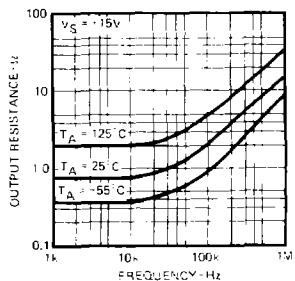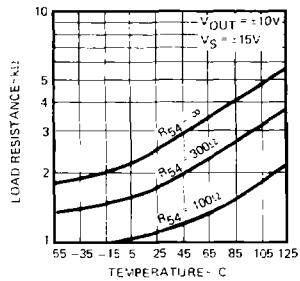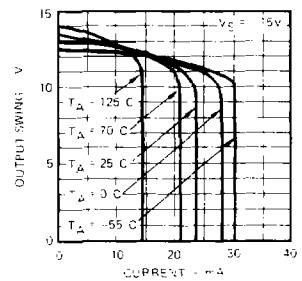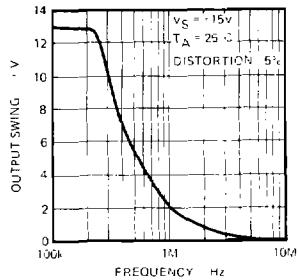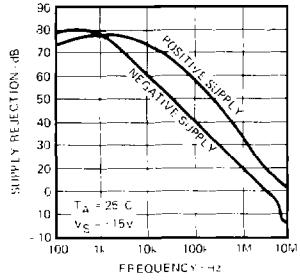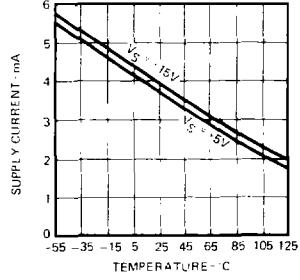**Input Current****Output Noise Voltage****Large Signal Pulse Response****Voltage Gain****Voltage Gain****Voltage Gain****Output Resistance****Symmetrical Output Swing****Positive Output Swing****Large Signal Frequency Response****Power Supply Rejection****Supply Current**


## APPLICATIONS
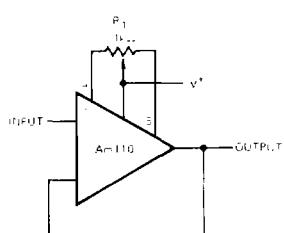
## Offset Nulling Circuit



LIC-681


## Increasing Negative Swing Under Load

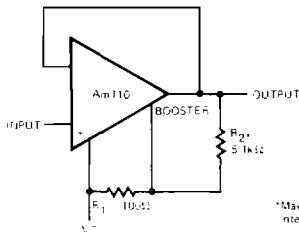

\*May be added to reduce internal dissipation


LIC-682

## Differential Input Instrumentation Amplifier

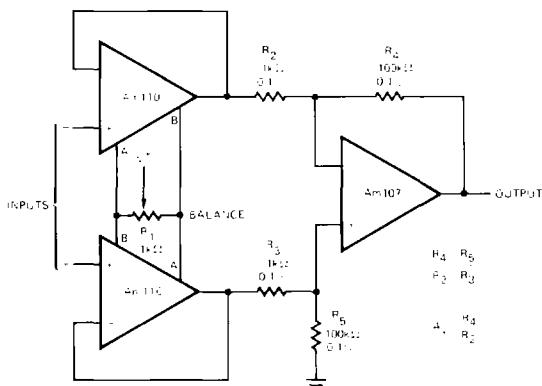

LIC-683

## Fast Inverting Amplifier With High Input Impedance

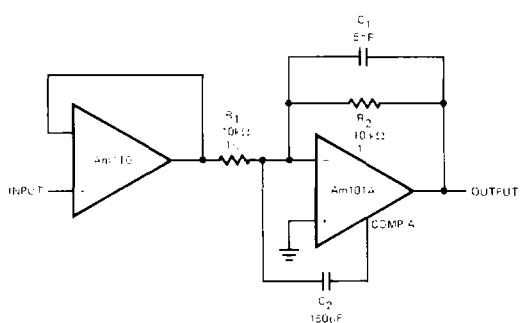

LIC-684

6

## Metallization and Pad Layout

