
.100" (2.54mm) Insulated Programmable Shunt



High Profile





.38 (WH (9.6) OR(

٦

.100 ± 003 (2.54 ±0.07

2.03 (0.76) SQ. HOLE (2)

LOCKING RAMP OPTIONAL

050 (1.27)

CONTACT


W/O TAB


.100 MAX (2.54)

0.5


06 (1.52) DIA

Low Profile

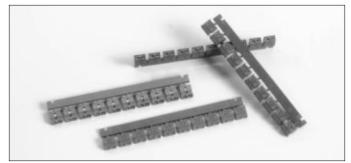





NOTE: ADDITIONAL COLOR OPTIONS - CONSULT FACTORY









SIDE VIEW

PRODUCT IS AVAILABLE WITH BOTH STANDARD AND HIGH RETENTION FORCE CONTACTS.

96XX-202-7X PRODUCT IS MATEABLE FROM EITHER END.