

SMT POWER INDUCTORS

Toroid - Military/Aerospace POGO Series



- Ruggedized header with POGO pins for secure board mounting
- Current Rating:** up to 23.8Adc
- Frequency Range:** up to 1MHz

Electrical Specifications @ 25°C — Operating Temperature -55°C to +130°C

Pulse 4,5 Part Number	Inductance @ Irated (μH)	Irated (A)	DCR (mΩ)		Inductance @ 0Adc (μH)	Reference ET (Volt-μsec)	Flux Density Factor (K1)	Core Loss Factor (K2)	Temp. Rise Factor (K3)	Connection
			TYP	MAX						
POGO 40										
PL8400	43.6	1.1	247.2	309	77	7.83	0.295	1.87E-10	114.23	Single
POGO 50										
PL8401	21.9	2.7	72.4	90.5	39.5	6.9	0.297	3.35E-10	85.71	Single
PL8402	4.025	6.4	18.4	23	6.575	3.135	0.638	4.52E-10	67.89	Single
PL8403	0.53	23.8	1.0	3	0.88	1	2.020	3.35E-10	85.71	Parallel
PL8404	1.1	21	1.7	2.5	2.1	1.75	1.116	4.52E-10	67.89	Parallel
POGO 60										
PL8405	2.1	22.4	2.5	3.4	4	3.25	0.559	9.58E-10	44.56	Parallel

NOTES:

- Reference values are for an inductor with a 55°C temperature rise. The core loss is 10% of the copper loss at the ET listed and 500kHz.
- Core does not saturate abruptly. The ET and DC current are limited by the desired inductance and temperature rise.
- In high volt-time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. In order to determine the approximate total losses (or temperature rise) for a given application, both copper and core losses should be taken into account.


Estimated Temperature Rise:

$$\begin{aligned} \text{Trise} &= K3 * (\text{CoreLoss}(W) + \text{CopperLoss}(W))^{.833} \text{ (C)} \\ \text{CopperLoss} &= \text{Irms}^2 * \text{DCR_Typical (m}\Omega) / 1000 \\ \text{CoreLoss} &= K2 * (\text{Freq_kHz})^{1.26} * (\Delta B)^{2.11} \\ \Delta B &= K1 * \text{Volt-}\mu\text{sec} * 100 \end{aligned}$$

- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PL8400 becomes PL8400T). Pulse complies to industry standard tape and reel specification EIA481.

Mechanical

Schematic

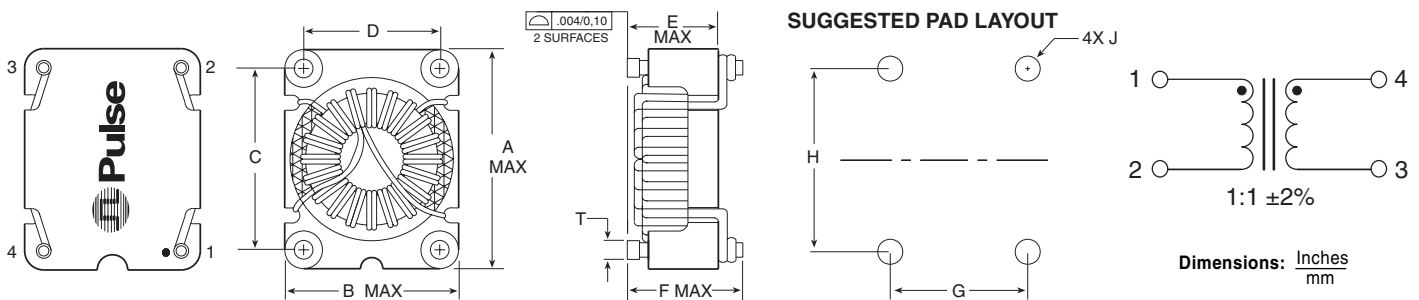

PKG	A	B	C	D	E	F	G	H	J	T	Weight (MAX)	Tube	Reel
POGO 40	.725	.575	.600	.450	.310	.380	.450	.600	.082	.062	3.5 grams	30	300
	18,42	14,61	15,24	11,43	7,87	9,65	11,43	15,24	2,08	1,57			
POGO 50	.910	.700	.730	.520	.400	.510	.520	.730	.145	.125	8.2 grams	35	200
	23,11	17,78	18,54	13,21	10,16	12,95	13,21	18,54	3,68	3,18			
POGO 60	1.280	1.070	1.100	.890	.400	.510	.890	1.100	.145	.125	14.2 grams	15	100
	32,51	27,18	27,94	22,61	10,16	12,95	22,61	27,94	3,68	3,18			

For More Information:

Pulse Worldwide Headquarters

2 Pearl Buck Court
Bristol, PA 19007
U.S.A.

www.pulseeng.com

TEL: 215 781 6400

FAX: 215 781 6403

Pulse

Northern Europe

3 Huxley Road
Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom

TEL: 44 1483 401700

FAX: 44 1483 401701

Pulse

Southern Europe

Zone Industrielle
F-39270
Orgelet
France

TEL: 33 3 84 35 04 04

FAX: 33 3 84 25 46 41

Pulse

China Headquarters

No. 1
Industrial District
Changan, Dongguan
China

TEL: 86 769 5538070

FAX: 86 769 5538870

Pulse North China

Room 1002
No. 819
Nanjing West Rd
Shanghai
China

TEL: 86 21 32181071

FAX: 86 21 32181396

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

TEL: 65 6287 8998

FAX: 65 6280 0080

Pulse North Asia

3F-4, No. 81, Sec. 1
Hsin Tai Wu Road
Hsi-Chih
Taipei Hsien
Taiwan

TEL: 886 2 26980228

FAX: 886 2 26980948

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2005. Pulse Engineering, Inc. All right reserved.

www.pulseeng.com

M111.A (9/05)