

EM01Z-EM01A

Plastic Silicon Rectifiers

VOLTAGE RANGE: 200 --- 600 V

CURRENT: 1.0 A




Features

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ◇ Case: JEDEC DO-41, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.012 ounces, 0.34 grams
- ◇ Mounting position: Any

DO - 41

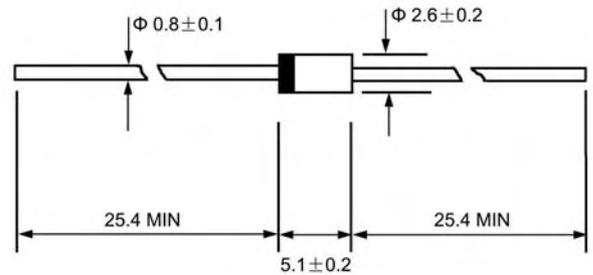

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

| | | EM01Z | EM01 | EM01A | UNITS |
|-------------------------------------------------------------------------------------------------------------------|-----------------|--------------|------|-------|---------------------------|
| Maximum recurrent peak reverse voltage | V_{RRM} | 200 | 400 | 600 | V |
| Maximum RMS voltage | V_{RMS} | 140 | 280 | 420 | V |
| Maximum DC blocking voltage | V_{DC} | 200 | 400 | 600 | V |
| Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ\text{C}$ | $I_{F(AV)}$ | 1.0 | | | A |
| Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$ | I_{FSM} | 45.0 | | | A |
| Maximum instantaneous forward voltage @ 1.0 A | V_F | 0.97 | | | V |
| Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$ | I_R | 5.0 50.0 | | | μA |
| Typical junction capacitance (Note1) | C_J | 15 | | | pF |
| Typical thermal resistance (Note2) | $R_{\theta JA}$ | 50 | | | $^\circ\text{C}/\text{W}$ |
| Operating junction temperature range | T_J | -55-----+150 | | | $^\circ\text{C}$ |
| Storage temperature range | T_{STG} | -55-----+150 | | | $^\circ\text{C}$ |


NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance from junction to ambient.

Ratings AND Characteristic Curves

FIG.1 – FORWARD DERATING CURVE


AVERAGE FORWARD CURRENT, AMPERES

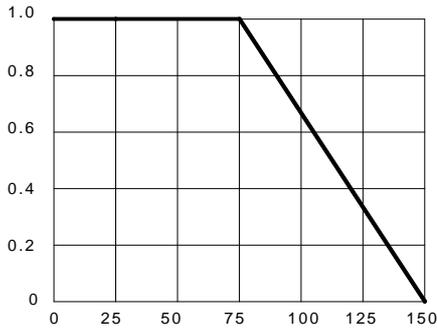

AMBIENT TEMPERATURE, °C

FIG.2 – TYPICAL FORWARD CHARACTERISTICS


FORWARD CURRENT, AMPERES

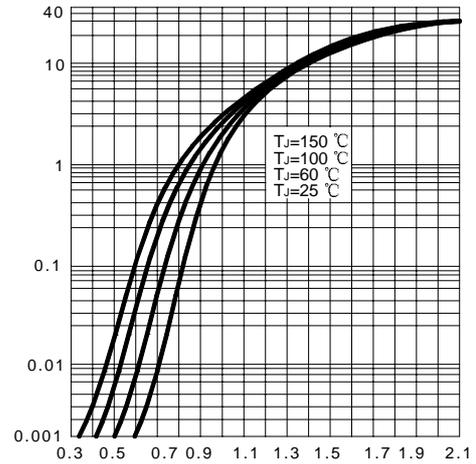

FORWARD VOLTAGE, VOLTS

FIG.3 – FORWARD SURGE CURRENT


PEAK FORWARD SURGE CURRENT, AMPERES

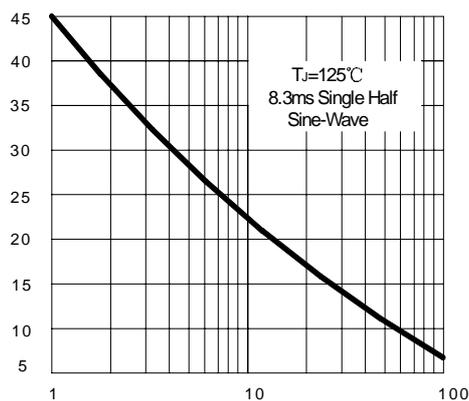

NUMBER OF CYCLES AT 60Hz

FIG.4 – TYPICAL JUNCTION CAPACITANCE

JUNCTION CAPACITANCE, pF

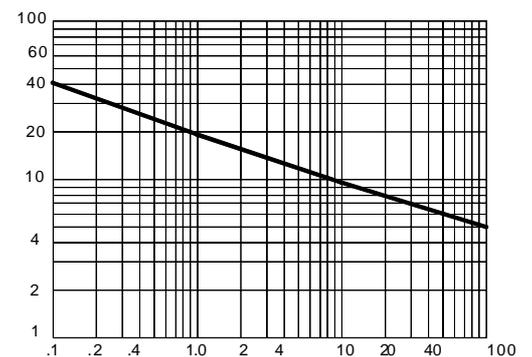

REVERSE VOLTAGE, VOLTS