

# ROITHNER LASERTECHNIK

A-1040 WIEN, FLEISCHMANNGASSE 9

TEL: +43 -1- 586 52 43 FAX: +43 -1- 586 41 43

e-mail: office@roithner-laser.com http://www.roithner-laser.com

## RLT9005MG

## TECHNICAL DATA



### Infrared Laserdiode

Structure: index guided single transverse mode

Lasing wavelength: 900 nm typ.


Output power: 5 mW cw

Package: 5.6 mm, TO-18




**NOTE!**  
LASERDIODE  
MUST BE COOLED!

### PIN CONNECTION:

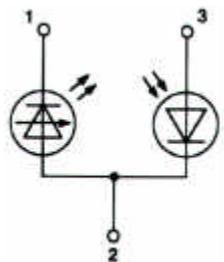

- 1) Laser diode cathode
- 2) Laser diode anode and photodiode cathode
- 3) Photodiode anode

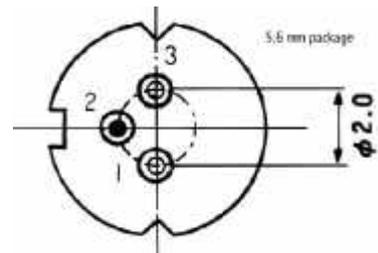

### Maximum Ratings (Tc = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Optical Output Power	P <sub>o</sub>	7	mW
LD Reverse Voltage	V <sub>R(LD)</sub>	2	V
PD Reverse Voltage	V <sub>R(PD)</sub>	30	V
Operation Case Temperature	T <sub>C</sub>	-10 .. +60	°C
Storage Temperature	T <sub>STG</sub>	-40 .. +85	°C

### Optical-Electrical Characteristics (Tc = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Threshold Current	I <sub>th</sub>	cw		30	40	mA
Operation Current	I <sub>op</sub>	P <sub>o</sub> = 5 mW		40	60	mA
Operating Voltage	V <sub>op</sub>	P <sub>o</sub> = 5 mW		1.6	1.8	V
Lasing Wavelength	λ <sub>p</sub>	P <sub>o</sub> = 5 mW	895	900	910	nm
Beam Divergence	θ <sub>//</sub>	P <sub>o</sub> = 5 mW	7	8	12	°
Beam Divergence	θ <sub>⊥</sub>	P <sub>o</sub> = 5 mW	30	33	38	°
Slope Efficiency	η	cw	0.5	0.7	1	mW/mA
Monitor Current	I <sub>m</sub>	P <sub>o</sub> = 5 mW	600	1200	2000	μA