


Blackburn[®]

Colour-Coded Compression Connectors

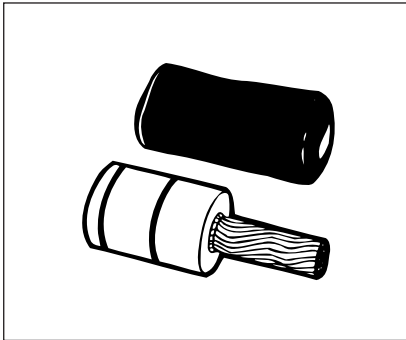


- Connector for aluminum conductor only; pigtail may be inserted into either aluminum or copper connectors
- Insulating covers included
- 90°C Rating per U.L. 486B
- Tin-plated stranded copper wire pigtail
- Tin-plated aluminum barrel pre-filled with oxide inhibitor and capped

Type PA – Pin Adapter Terminals

Cat. No.	Conductor Size	Copper Stud Size	Dimensions (in.)		O.D.	Die Colour Code
			A	B		
PA06	6 str.	8	7/8	1 1/32	.640	—
PA04	4 str.	6	7/8	1 1/32	.640	—
PA02	2 str.	4	7/8	1 1/32	.640	—
PA01	1 str.	3	1	1 1/32	.640	—
PA11	1/0 str.	2	1 1/4	1 9/32	.906	Red
PA21	2/0 str.	1	1 1/4	1 9/32	.906	Red
PA31	3/0 str.	1/0	1 3/8	1 7/8	.906	Red
PA41	4/0 str.	2/0	1 3/8	1 7/8	.906	Red
PA25	250 kcmil	3/0	1 1/2	2 1/16	1.155	Brown
PA30	300 kcmil	4/0	1 3/8	2 1/16	1.155	Brown
PA35	350 kcmil	4/0	1 3/8	2 1/16	1.155	Brown
PA40	400 kcmil	250 kcmil	1 3/8	2 3/32	1.375	Pink
PA50	500 kcmil	350 kcmil	1 3/8	2 3/32	1.375	Pink
PA60	600 kcmil	350 kcmil	1 3/8	2 3/4	1.500	Yellow
PA75	750 kcmil	500 kcmil	2	2 3/4	1.500	Yellow

U.L. Listed AL9CU.

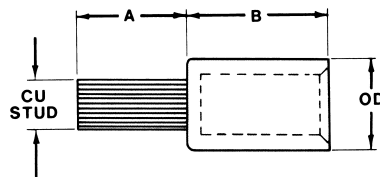**Thomas & Betts**