



## SOZA161 THRU SOZA166

VOLTAGE RANGE 100 to 600 Volts

CURRENT 16.0 Amperes


### TECHNICAL SPECIFICATION:

#### FEATURES

- Low Leakage
- Low forward voltage drop
- High current capability
- High forward surge current capacity

#### MECHANICAL DATA

- Copper slug
- Technology: cell with vacuum soldered
- Polarity: red dots denotes cathode end
- Mounting Position: Any
- Weight: 0.0124 ounces, 0.35 grams

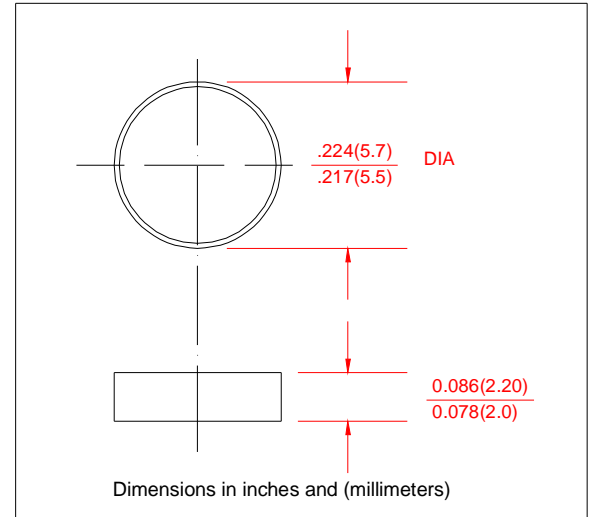

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60HZ, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SOZA161	SOZA162	SOZA163	SOZA164	SOZA166	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	200	300	400	600	Volts
Maximum RMS Voltage	$V_{RMS}$	70	140	210	280	420	Volts
Maximum DC Blocking Voltage	$V_{DC}$	100	200	300	400	600	Volts
Maximum Average Forward Rectified Current, At $T_c=110^\circ C$	$I_O$	16.0					Amps
Peak Forward Surge Current 3.3mS single half sine wave superimposed on Rated load (JEDEC method)	$I_{FSM}$	300					Amps
Maximum instantaneous Forward Voltage at 80A	$V_F$	1.10					Volts
Maximum DC Reverse Current at Rated $T_A=25^\circ C$ DC Blocking Voltage per element $T_A=100^\circ C$	$I_R$	5.0					UA
		250					
Typical Thermal Resistance	$R_{\theta JC}$	0.8					$^\circ C/W$
Operating and Storage Temperature Range	$T_J, T_{STG}$	(-65 to +175)					$^\circ C$

#### Notes:


1. Enough heatsink must be considered in application.

**SOZA161 THRU SOZA166**


**VOLTAGE RANGE** 100 to 600 Volts  
**CURRENT** 16.0 Amperes

**RATINGS AND CHARACTERISTIC CURVES SOZA161 THRU SOZA166**


**FIG.1 TYPICAL FORWARD CURRENT DERATING CURVE**

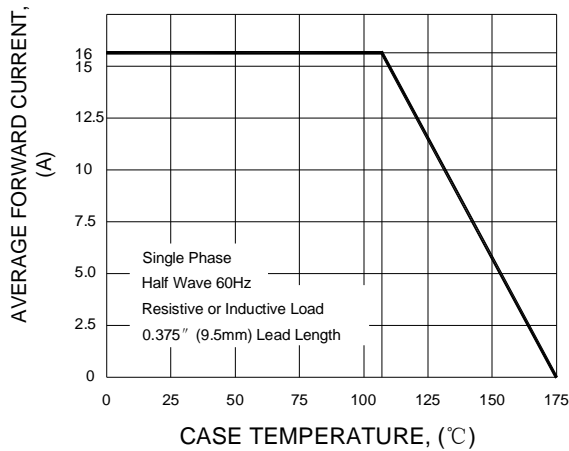

**FIG.2 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

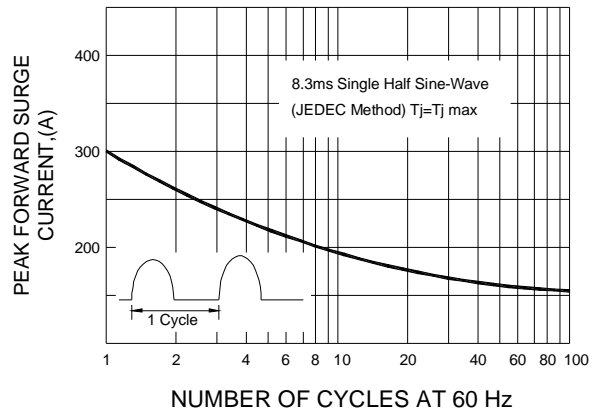

**FIG.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

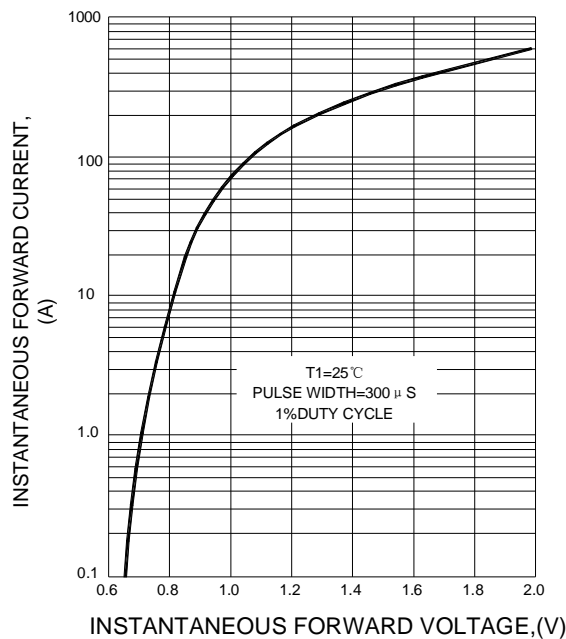

**FIG.4 FORWARD POWER DISSIPATION**

