



BKS-S29 & S30 Connectors

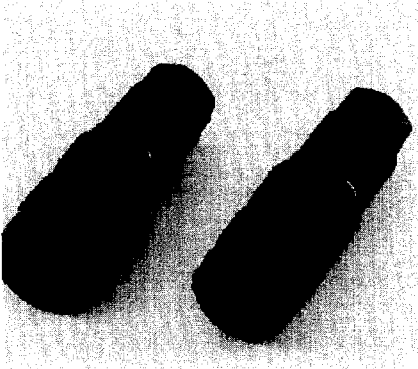


Dimensions (in mm)

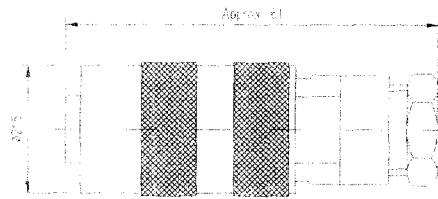

For use on BALLUFF BIS Electronic Identification Systems

Wiring Connections

View: looking at face of connectors

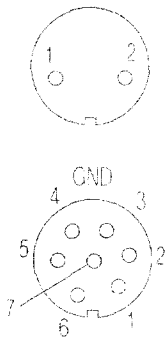

Description

Straight connectors with compression fitting at cable entry for strain relief.

S29 has 2 female pins.

S30 has 7 female pins.

Mechanical Data

Connector Shell Material
Protection
Wire Size

PETP - Black Chromium Plated Brass
IP 67, NEMA 4, 4X, 6, 12, 13
AWG 18 (max)

Electrical Data

Voltage rating
Amperage rating
Temperature rating

250 V AC
5A @ 250 V AC
-40 °C...+85°C (-40°F...+185°F)

Ordering Codes

BKS - S29 - 00*

BKS - S30 - 00*

* For connector prewired with conductor cable, change "00" to cable length in meters.
Example: BKS-S29-05 (5 meter cable)