

Fuseholder Open Design, Holder for MSB and 172876, SMD



125 VAC/DC · 0.9 W (UL/CSA)

**Standards**

- UL 512
- CSA C22.2 no. 39

Approvals

- UL File Number: E41738

References

General Product Information

Packaging Details

Fuseholder to MSB; 172876

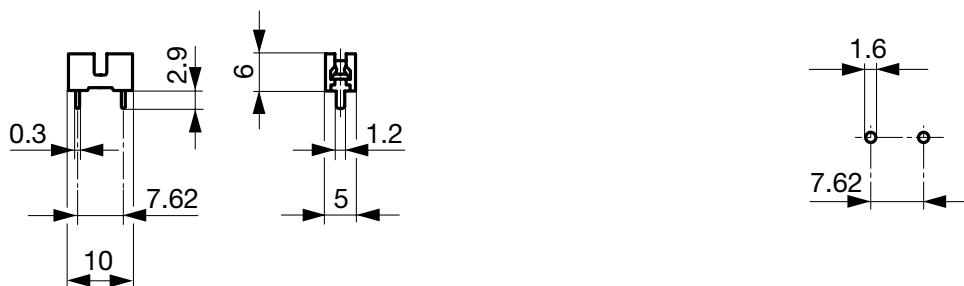
Weblinks

Approvals, RoHS, CHINA-RoHS, e-Store, Distributor-Stock-Check, Accessories, Product Change Notification (PCN)

Technical Data

Fuse-Link	2 x 7 mm
Mounting	PCB
Terminal	Solder THT
Rated Voltage	125 VAC/DC
Rated Power Acceptance IEC	0.9W @ Ta 23 °C
Degree of Protection	IP 00
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoplastic, black, UL 94V-0
Material: Terminals	Tin-Plated Bronze
Unit Weight (Socket/Cap)	0.45 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	☒, Approvals

Soldering Methods	Wave
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A

Abmessungen


Drilling diagram

Variants

Holder	Order Number
●	7090.9020.xx

Packaging Unit

- .xx = .03 Plastic Bag (100 pcs.)
- .xx = .55 Blister Tape (500 pcs.)