

Powerex General Purpose Rectifier Diodes are designed with high locking voltage capability and low forward voltage drop to minimize conduction losses. These are packaged in hermetic, ceramic Pow-R-Disc packages which can be mounted using commercially available clamps and heatsinks or fully assembled to a variety of air or water cooled heat exchangers.

FEATURES:

- Low On-State Voltage
- Hermetic Ceramic Package
- Excellent Surge and I^2t Ratings

APPLICATIONS:

- DC Power Supplies
- Input Rectifiers
- Plating Supplies

ORDERING INFORMATION

Select the complete 12 digit Part Number using the table below.
EXAMPLE: RBS82456XXOO is a 2400V-5680A General Purpose Diode with a typical reverse recovery time of 25 μ s.

PART	Voltage Rating $V_{DRM}-V_{RRM}$	Voltage Code	Current Rating I_{TAVG}	Current Code	Reverse Recovery t_{RR}	Lead Code
RBS8	2400	24	5680	56	XX	OO
	2200	22				
	2000	20			25 μ s typical	
	1800	18				

Revised: 7/28/2005



Absolute Maximum Ratings

Characteristic	Symbol	Rating	Units
Repetitive Peak Reverse Voltage	V_{RRM}	2400	Volts
Average On-State Current, $T_C=90^\circ\text{C}$	$I_{F(Avg.)}$	5680	A
RMS On-State Current, $T_C=90^\circ\text{C}$	$I_{F(RMS)}$	8922	A
Average On-State Current, $T_C=55^\circ\text{C}$	$I_{F(Avg.)}$	6400	A
RMS On-State Current, $T_C=55^\circ\text{C}$	$I_{F(RMS)}$	10053	A
Peak One Cycle Surge Current, 60Hz, $V_R=0.6*V_{RRM}$	I_{FSM}	85,000	A
Fuse Coordination I^2t , 60Hz	I^2t	3.01E+07	A ² s
Peak One Cycle Surge Current, 50Hz, $V_R=0V$	I_{FSM}	103,700	A
Fuse Coordination I^2t , 50Hz	I^2t	4.48E+07	A ² s
Operating Temperature	T_j	-40 to+175	°C
Storage Temperature	$T_{Stg.}$	-50 to+200	°C
Approximate Weight		2.5	lb
		1.13	Kg
Mounting Force		6,000 - 10,000	lbs
		26.6 - 44.4	Knewtons

Information presented is based upon limited testing or projected capabilities. This information is subject to change without notice. The manufacturer makes no claim as to suitability for use, reliability, capability or future availability of this product.



RBS8__56XX

GENERAL PURPOSE RECTIFIER DIODE

Powerex, Inc., 200 Hillis Street, Youngwood, PA 15697-1800 (724)925-7272 PWRX.COM

5680 Amperes 2400 Volts


Electrical Characteristics, Tj=25°C unless otherwise specified

Characteristic	Symbol	Test Conditions	Rating			Units
			min	typ	max	
Repetitive Peak Reverse Leakage Current	I_{RRM}	Tj=175°C, V_{RRM} =Rated		100	150	ma
Peak On-State Voltage	V_{FM}	Tj=175°C, I_{FM} =4000A			0.95	V
V_{FM} Model, Low Level	V_0	Tj=175°C			0.661	V
$V_{FM} = V_0 + r \cdot I_{FM}$	r	15% $I_{FM} - \pi \cdot I_{FM}$			6.59E-05	Ω
V_{FM} Model, High Level	V_0	Tj=175°C			0.799	V
$V_{FM} = V_0 + r \cdot I_{FM}$	r	$\pi \cdot I_{FM} - I_{FSM}$			5.64E-05	Ω
V_{FM} Model, 4-Term	A	Tj=175°C			0.613	
$V_{FM} = A + B \cdot \ln(I_{FM}) +$	B	15% $I_{FM} - I_{FSM}$			-0.0118	
$C \cdot (I_{FM}) + D \cdot (I_{FM})^{1/2}$	C				3.926E-05	
	D				0.004637	
Reverse Recovery Time	t_{RR}	Tj=25°C, I_{FM} =400A $di_R/dt = 25 A/\mu s$		25		μs


Thermal Characteristics

Characteristic	Symbol	Test Conditions	Rating			Units															
			min	typ	max																
Thermal Resistance																					
Junction to Case	$R\theta_{jc}$	Double side cooled		0.0085	0.0095	°C/Watt															
Case to Sink	$R\theta_{cs}$	Double side cooled		0.0015	0.002	°C/Watt															
Thermal Impedance Model	$Z\theta_{jc}$	Double side cooled																			
$Z\theta_{jc}(t) = \sum(A(N) \cdot (1 - \exp(-t/\text{Tau}(N))))$																					
where: <table style="display: inline-table; vertical-align: middle;"> <tr> <td>N =</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>A(N) =</td> <td>5.224E-05</td> <td>1.186E-03</td> <td>2.905E-03</td> <td>5.351E-03</td> </tr> <tr> <td>Tau(N) =</td> <td>2.648E-06</td> <td>3.427E-02</td> <td>2.736E-01</td> <td>2.030E+00</td> </tr> </table>							N =	1	2	3	4	A(N) =	5.224E-05	1.186E-03	2.905E-03	5.351E-03	Tau(N) =	2.648E-06	3.427E-02	2.736E-01	2.030E+00
N =	1	2	3	4																	
A(N) =	5.224E-05	1.186E-03	2.905E-03	5.351E-03																	
Tau(N) =	2.648E-06	3.427E-02	2.736E-01	2.030E+00																	

Maximum On-State Voltage Drop

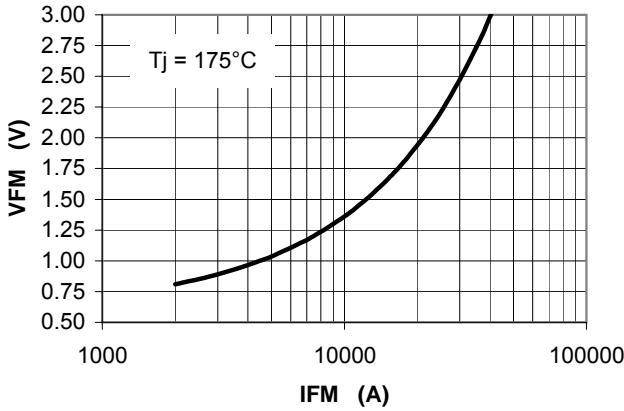


MAXIMUM TRANSIENT THERMAL IMPEDANCE

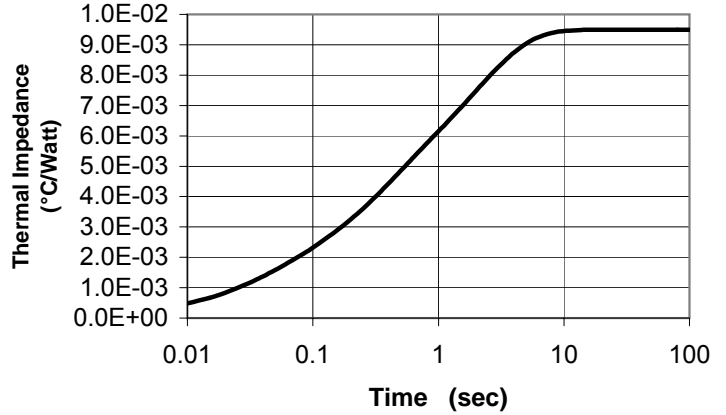


Maximum On-State Power Dissipation

SINE WAVE

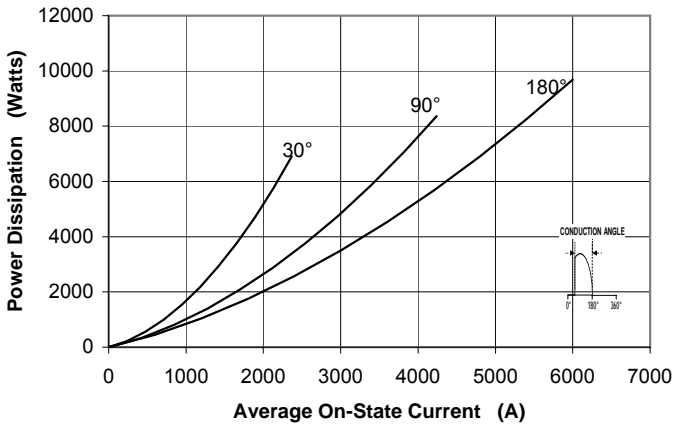


Maximum Allowable Case Temperature

SINE WAVE

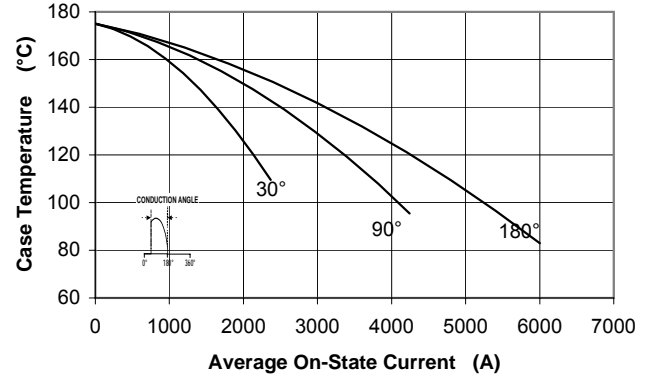

Maximum On-State Power Dissipation

SQUARE WAVE

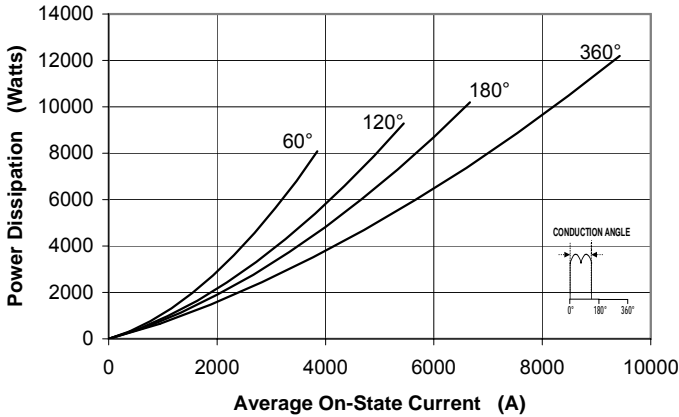

Maximum Allowable Case Temperature

SQUARE WAVE

