



RoHS Compliant Product
A suffix of "C" specifies halogen free

FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 2.24 grams (approximate)

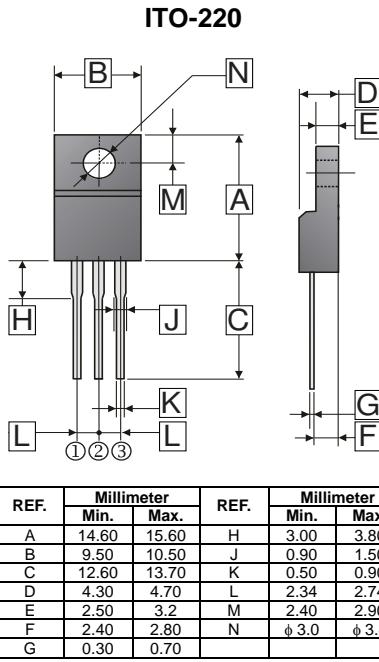

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load. For capacitive load, de-rate current by 20%.


Parameter	Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	80	V
Working Peak Reverse Voltage	V_{RSM}	80	V
Maximum DC Blocking Voltage	V_{DC}	80	V
Maximum Average Forward Rectified Current	I_F	15	A
		30	
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	180	A
Maximum Instantaneous Forward Voltage	V_F	0.85	V
		0.72	
Maximum DC Reverse Current at Rated DC Blocking Voltage ³	I_R	0.03	mA
		6	
Typical Junction Capacitance ¹	C_J	350	pF
Typical Thermal Resistance ²	$R_{\theta JC}$	4	°C / W
Voltage Rate Of Change (Rated V_R)	dv / dt	10000	V / µs
Operating Temperature Range T_J	T_J	-50~150	°C
Storage Temperature Range T_{STG}	T_{STG}	-65~175	°C

Notes:


1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.
3. Pulse test: 300µS pulse width, 2% duty cycle.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

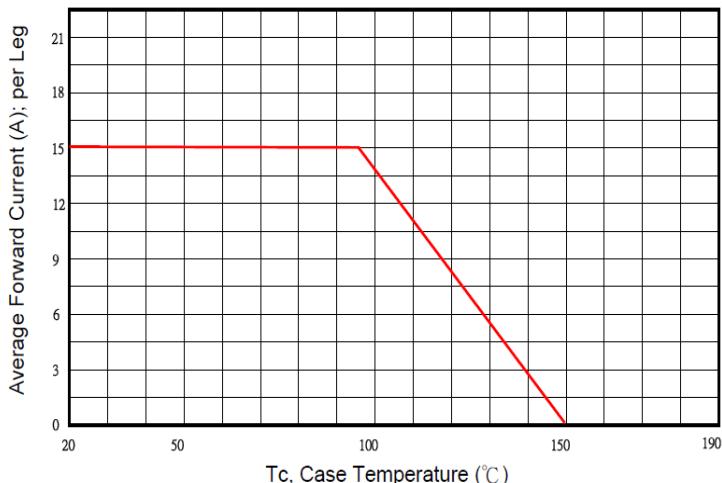


Typical Junction Capacitance

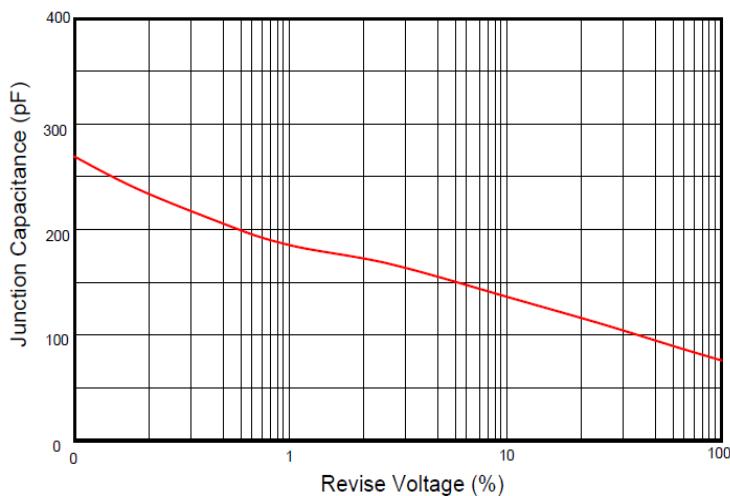

Maximum Non-Repetitive Forward Surge Current

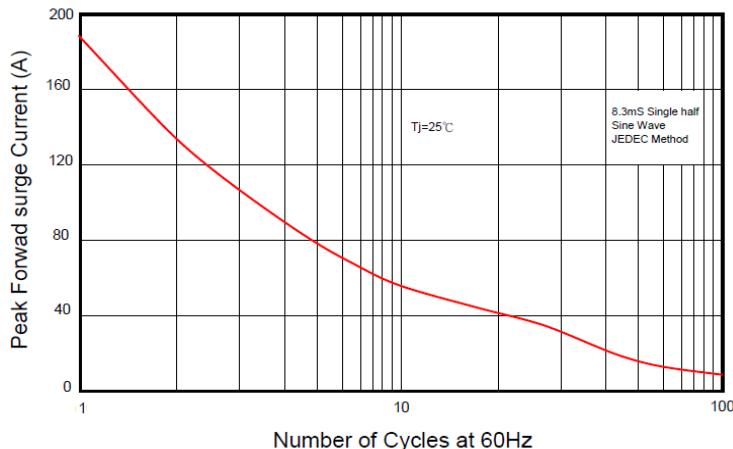

Typical Forward Characteristic

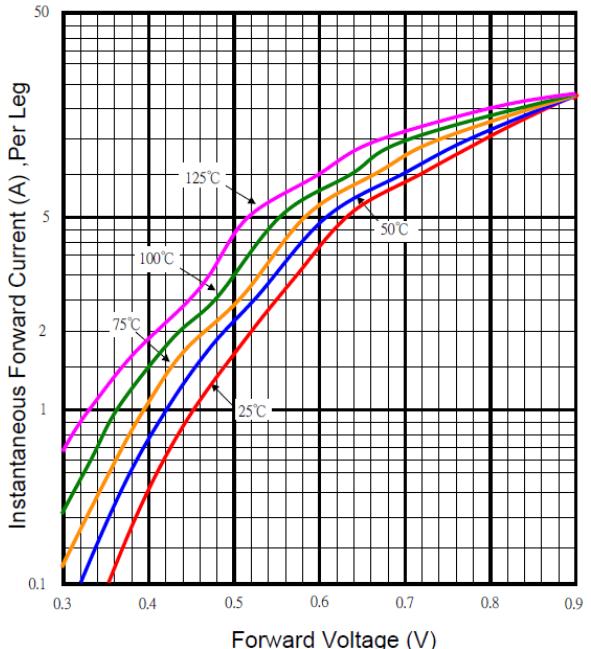

Typical Reverse Characteristic

