

Silicon NPN Power Transistors

2N6357

DESCRIPTION

- With TO-3 package
- High DC current gain
- DARLINGTON

APPLICATIONS

- For general-purpose amplifier and low-frequency switching applications

PINNING

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

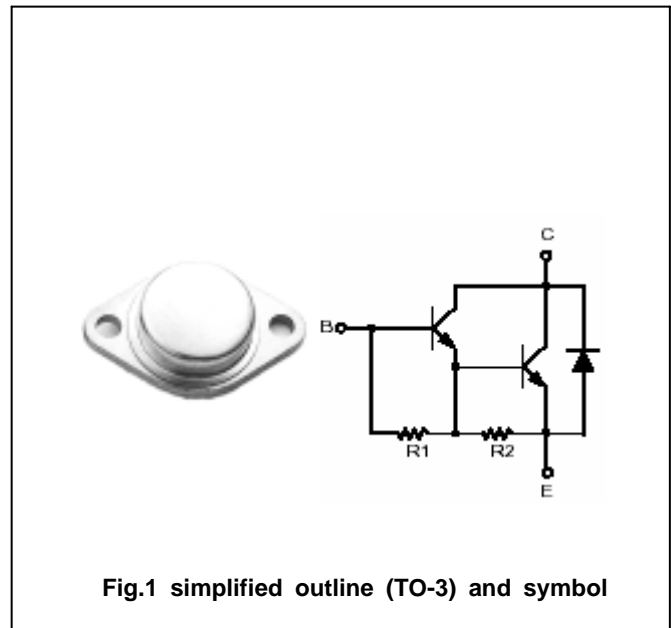


Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings(Ta= )

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	Open emitter	80	V
V <sub>CEO</sub>	Collector-emitter voltage	Open base	60	V
V <sub>EBO</sub>	Emitter-base voltage	Open collector	5	V
I <sub>C</sub>	Collector current		20	A
I <sub>B</sub>	Base current		0.5	A
P <sub>D</sub>	Total Power Dissipation	T <sub>C</sub> =25	150	W
T <sub>j</sub>	Junction temperature		200	
T <sub>stg</sub>	Storage temperature		-65~200	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
R <sub>th j-c</sub>	Thermal resistance junction to case	1.09	/W

## Silicon NPN Power Transistors

2N6357

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CEO</sub>	Collector-emitter breakdown voltage	I <sub>C</sub> =0.2A ; I <sub>B</sub> =0	60			V
V <sub>CEsat-1</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =10A ; I <sub>B</sub> =40mA			2.0	V
V <sub>CEsat-2</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =20A ; I <sub>B</sub> =1A			4.0	V
V <sub>BE sat</sub>	Base-emitter saturation voltage	I <sub>C</sub> =20A ; I <sub>B</sub> =1A			4.0	V
V <sub>BE</sub>	Base-emitter on voltage	I <sub>C</sub> =10A ; V <sub>CE</sub> =4V			2.8	V
I <sub>CEO</sub>	Collector cut-off current	V <sub>CE</sub> =60V ; I <sub>B</sub> =0			1.0	mA
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =80V ; I <sub>E</sub> =0			0.5	mA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =5V ; I <sub>C</sub> =0			5.0	mA
h <sub>FE-1</sub>	DC current gain	I <sub>C</sub> =4A ; V <sub>CE</sub> =5V	500		5000	
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> =20A ; V <sub>CE</sub> =5V	100			

PACKAGE OUTLINE

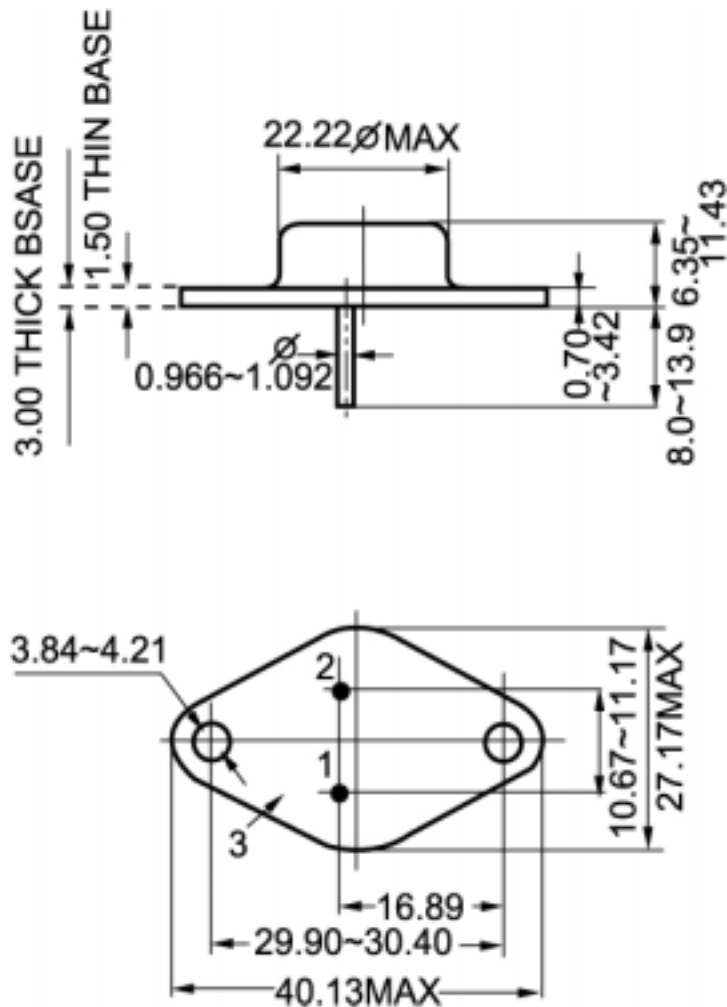


Fig.2 outline dimensions (unindicated tolerance:  $\pm 0.10\text{mm}$ )