

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.30KGF min.


Electrical

Current Rating: 0.5A per pin min.
 Dielectric Withstanding Voltage: 125V AC
 Contact Resistance: 30mW max
 Dielectric Withstanding Voltage: 500V
 Insulation Resistance: 1000MW min


Physical

Housing: PBT, Glass Filled, UL94V-0
 Contact: Copper Alloy
 Plating: See "ORDERING INFORMATION"
 Solder Pad: Copper Alloy
 Operating Temperature: -55 to +105

Header Connector
HS6725 Series
Vertical, SMT Type, Plug
1.27mm [.050"] Pitch

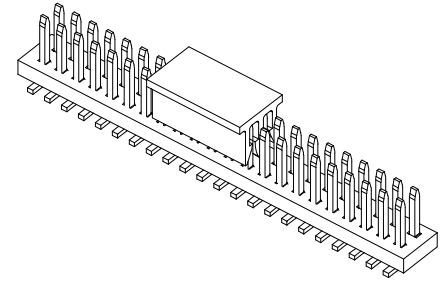

DRAWING

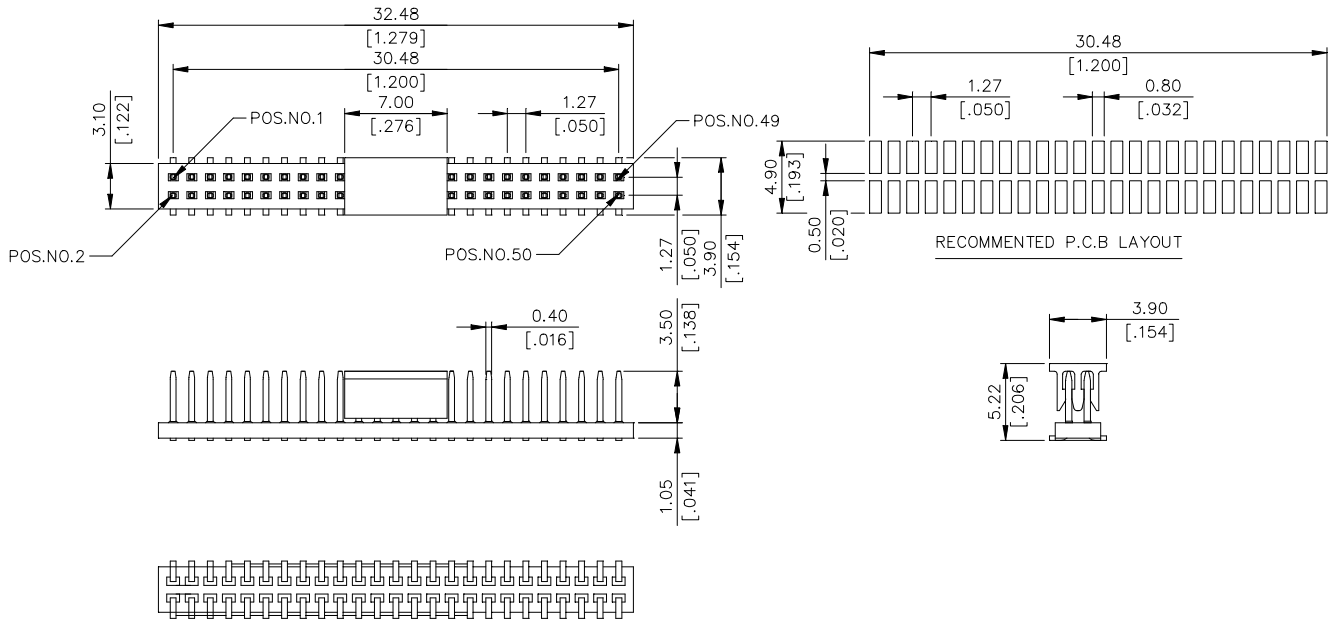

ORDERING INFORMATION

PRODUCT NO.: H S 67 25 * - ** *

