


A

A

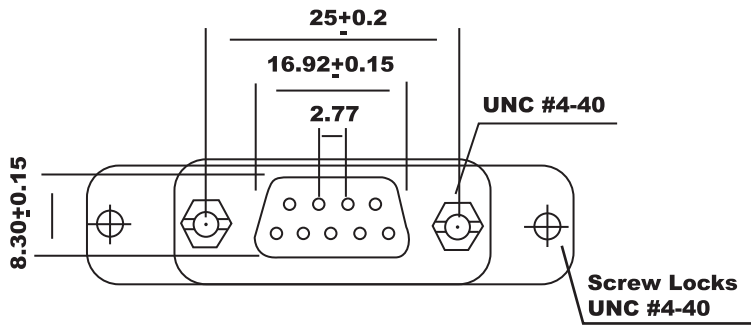


DB9 PIN(M)	DB25PIN (F)
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
Shell	Shell

B

B

C

C

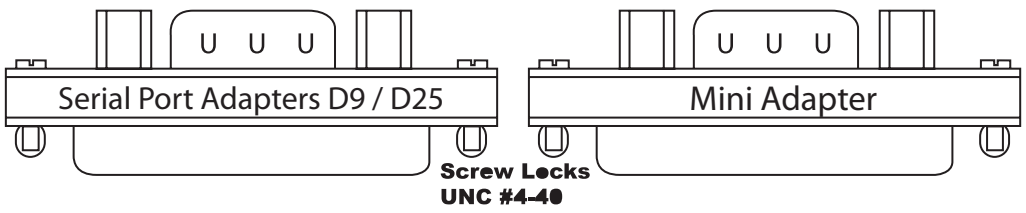

Specification:


- 1.Voltage Rating: 300 VAC(rms)
- 2.Current Rating: 3 AMP CONTINUOUS
- 3.Dielectric Strength: 500 VAC
- 4.Contact Resistance: 10m OHM MAX 1 ADC
- 5.Insulation Resistance: 500M OHM min.
- 6.Mating Force Insertion Force: 1 oz-16 oz
Average: 150 gram
Extraction Force: 1 KG min.

D

D

E

E

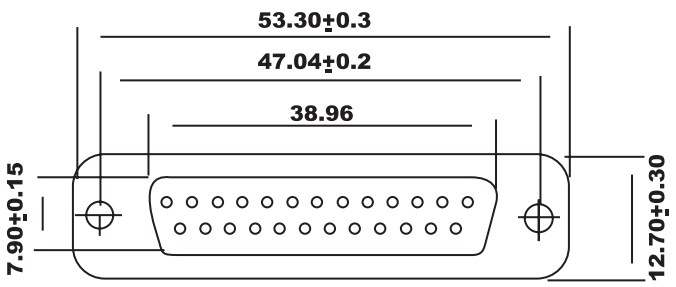

Materials:

- 1.Housing: Thermoplastic P.B.T UL 94V-0, Black
- 2.Contact: Phosphor Bronze Gold, Selective Plated Over Nickel
- 3.Shell: Steel Tin Plated
- 4.Packing: See P-0039 Rev.C Packing Drawing + EAN Code
EAN Code: 4016032059943
- 5.Label: Orange Color with White Character

F

F

G

G

Scale	1:1						Name	Item No. AB468-R
TOLERANCE					Drawn	11.22.11	Chappell	
X.X	±0.40				Approved			Title D-Sub RS 232 Adapter, 9 Pin - Male / 25 Pin - Female
X.XX	±0.25							
X.XXX	±0.15							Drawing No.
Angle	±3°							rev00
								Replace
								Sheet
		Modification	Date	Name				



H

H