



PCB Layout Component Side Shown

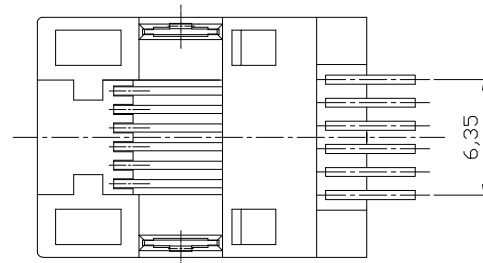

- NOTES:**
Mechanical:
 1. Housing material : High Temp. UL94V-0 , Color: Black
 2. Contact material: Phosphor Bronze t=0.35mm
 ③ 3. Contact plating: 6u" Gold on contact area Tin on solder side all over Nickel
 4. Operating Life: 750 Cycles min.
 5. PCB Retention Post-solder: 10 LBS min.
Electrical:
 1. Voltage Rating: 125VAC.
 2. Current Rating: 1.5AMP.
 3. Contact Resistance: 35mΩ max.
 4. Insulation Resistance: 1000MΩ min. @ 500 VDC
 5. Dielectric Strength: 1000 VAC 60Hz, 1 min.
Environmental:
 1. Storage: -40°C To +85°C
 ③ 2. Operation: -40°C~+85°C
 ③ 3. IR Reflow Soldering Temp: 255°C~265°C(5~10S)
 ③ Packing: 150pcs/Tape reel, 1500pcs/Carton

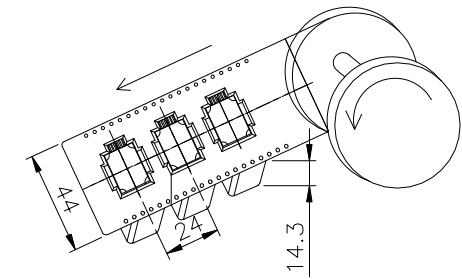

RoHS compliant
Unit:mm



File No.: E345352

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	15.07.2009	Dean
X.X	±0.20					Approved	27.05.2013	Amy
X.XX	±0.15							
X.XXX	±0.10	③	Update	27.05.2013	Amy			
DIM	TOL	②	Update drawing	23.08.2011	Jason			
		①	Drawn	15.07.2009	Dean			
Angle	±5°	Id.	Modification	Date	Name			



Customer-No.	
ASSMANN WSW-No. A-20041-LP/SMT-C	
Drawing-No.	ASS 1052A CO rev03
Replace	SHEET

1

2

3

4

5

6

7