


1200V, 15A High Speed Field Stop IGBT

Features

- Low gate charge
- Field Stop Technology
- Low saturation voltage:
 $V_{CE(sat)} = 1.8V$ (@ $I_C = 15A, T_C = 25^\circ C$)
- RoHS compliant product


Applications

- General purpose inverters
- Induction heating (IH)
- UPS

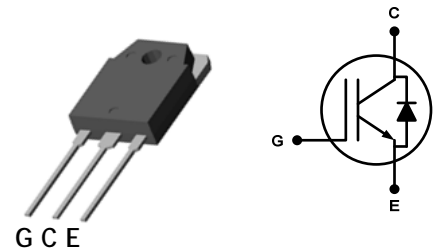
TO-247

Ordering Information

Part Number	Marking	Package
SGTN15C120HW	N15C120H	TO-247

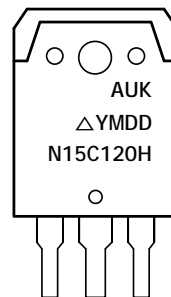

Column 1: Manufacturer
 Column 2: Production Information
 e.g.) Δ YMDD
 -. Δ : Factory Management Code
 -. YMDD: Date Code (Year, Month, Daily)
 Column 3: Device Code

Absolute Maximum Ratings ($T_C=25^\circ C$ unless otherwise noted)

Characteristic	Symbol	Rating	Unit	
Collector-emitter voltage	V_{CES}	1200	V	
Continuous collector current ⁽¹⁾	I_C	$T_C=25^\circ C$	30	A
		$T_C=100^\circ C$	15	A
Pulsed collector current ⁽²⁾	I_{CM}	45	A	
Gate-emitter voltage	V_{GES}	± 20	V	
Turn-off safe area	-	45	A	
Power dissipation	P_D	150	W	
Operating and storage temperature range	T_J, T_{stg}	-55 to 150	$^\circ C$	
Maximum lead temperature for soldering purpose	T_L	300	$^\circ C$	

¹⁾ Collector current limited by maximum junction temperature

²⁾ Pulse width limited by maximum junction temperature and turn-off within RBSOA.

Electrical Characteristics (T_A=25°C unless otherwise noted)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Off-Characteristics						
Collector-emitter breakdown voltage	BV _{CES}	I _C =500μA, V _{GS} =0	1200	-	-	V
Breakdown voltage temperature coefficient	$\frac{\Delta BV_{CES}}{\Delta T_J}$	I _C =1mA, reference to 25°C	-	0.6	-	V/°C
Zero gate voltage collector current	I _{CES}	V _{CE} =1200V, V _{GS} =0V, T _C =25°C	-	-	0.2	mA
		V _{CE} =1200V, T _C =100°C	-	-	2	mA
		V _{CE} =1200V, T _C =150°C	-	-	2.5	mA
Gate-body leakage current	I _{GSS}	V _{DS} =0V, V _{GS} =±20V	-	-	±100	nA
On-Characteristics						
Gate threshold voltage	V _{GE(th)}	V _{CE} =V _{GE} , I _C =600μA	4.5	-	6.5	V
Collector-emitter saturation voltage	V _{CE(sat)}	V _{GE} =15V, I _C =15A	-	1.8	2.4	V
		V _{GE} =15V, I _C =50A, T _C =150°C	-	2.1	-	V
Short collector current ⁽³⁾	I _{C(SC)}	V _{GE} =15V, V _{CE} =600V, t _{sc} < 10μs, T _C =150°C	-	160	-	A
Dynamic-Characteristics						
Input capacitance	C _{ies}	V _{CE} =25V, V _{GE} =0V, f=1MHz	-	1500	2000	pF
Output capacitance	C _{oes}		-	100	160	
Reverse transfer capacitance	C _{res}		-	70	110	
Turn-on delay time ^{(4),(5)}	t _{d(on)}	V _{CE} =600V, I _C =15A, R _G =56Ω, Inductive Load	-	30	-	ns
Rise time ^{(4),(5)}	t _r		-	100	-	
Turn-off delay time ^{(4),(5)}	t _{d(off)}		-	100	-	
Fall time ^{(4),(5)}	t _f		-	150	-	
Turn-on energy ^{(4),(5)}	E _{on}		-	1.5	-	mJ
Turn-off energy ^{(4),(5)}	E _{off}		-	0.9	-	
Total switching energy ^{(4),(5)}	E _{total}		-	2.4	-	
Total gate charge ^{(4),(5)}	Q _g	V _{CE} =600V, V _{GE} =15V, I _C =15A	-	100	-	nC

³⁾ Allowed number of short circuit: <1000; time between short circuit: >1s.

⁴⁾ Pulse test: Pulse width≤300μs, Duty cycle≤2%

⁵⁾ Essentially independent of operating temperature typical characteristics

SGTN15C120HW

Anti-Parallel Diode Characteristics and Maximum Ratings ($T_C=25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward on voltage	V_F	$V_{GE}=0V, I_F=15A$	-	-	2.9	V
Reverse recovery time ^{(4),(5)}	t_{rr}	$I_F=10A, V_{GE}=0V, V_R=800V$ $di_F/dt=750A/\mu s$	-	150	-	ns
Reverse recovery charge ^{(4),(5)}	Q_{rr}		-	1.2	-	μC


Thermal Characteristics

Characteristic	Symbol	Rating	Unit
Thermal resistance, junction to case	$R_{th(j-c)}$	Max. 0.6	$^\circ\text{C}/\text{W}$
Thermal resistance, junction to ambient	$R_{th(j-a)}$	Max. 40	

Package Outline Dimensions

TO-247

单位 Unit: mm

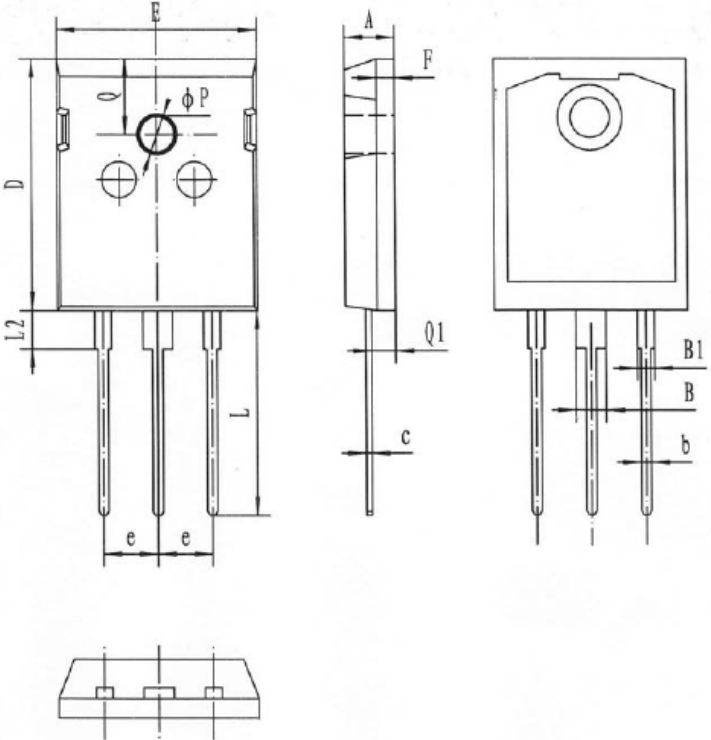

符号 symbol	MIN	MAX
A	4.90	5.10
B	2.85	3.11
B1	1.95	2.05
b	1.15	1.25
c	0.60TYP	
D	20.77	21.07
E	15.77	16.03
e	5.32	5.58
F	1.92	2.08
L	20.05	20.31
L2	4.22	4.32
Q	6.00	6.20
Q1	2.33	2.43
P	3.65	3.75

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.