
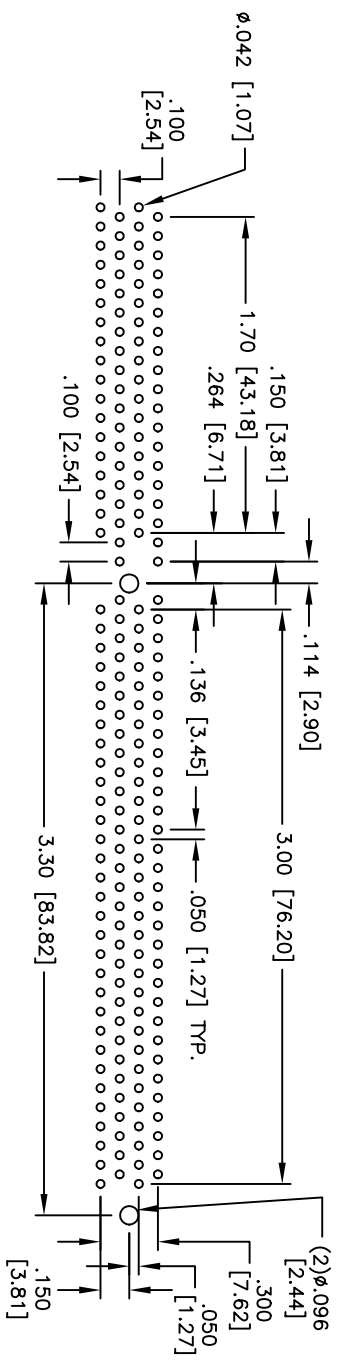
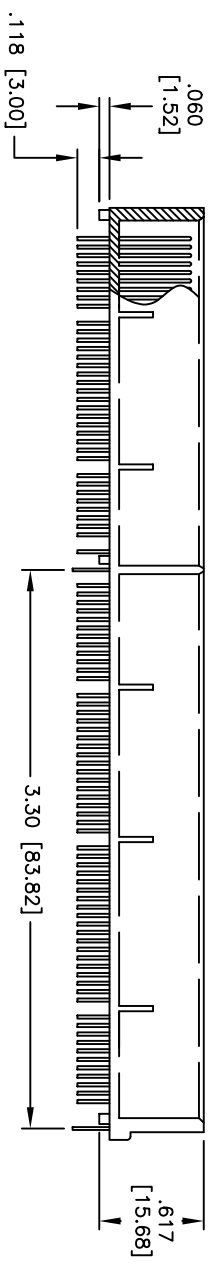


APPROVED: _____	DATE: _____	TITLE: _____
Rev	AWO #	Description
-		RELEASED
		Date
		3/23/05
		Appr

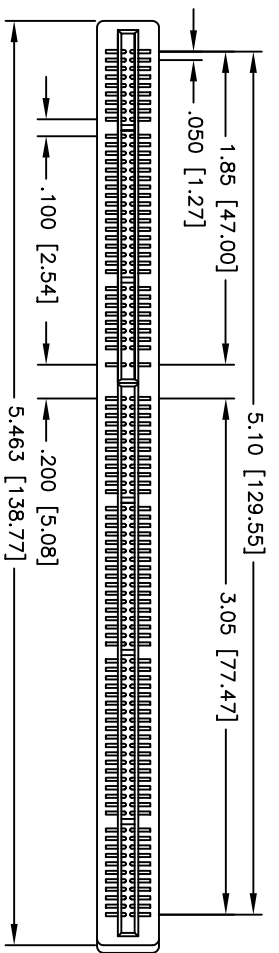

PCB LAYOUT

SPECIFICATIONS:

Material: Insulator: PPS, 30% glass reinforced, rated UL 94V-0

Insulator color: Dark Brown

Contacts: Phosphor Bronze

Plating: Gold over Nickel underplate on contact area, Tin over Copper underplate on PCB tolls

Electrical: Operating voltage: 125 VAC max

Contact resistance: 3 Amps max

Insulation resistance: 20 mohms max initial

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating: Operating temperature: -55°C to +105°C

Environmental: Lead free, RoHS compliant

Recommended soldering temp: 230°C for 5 seconds



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES: .X ±.10 ØXX ±.015
.XX ±.020 ØXXX ±.010
.XXX ±.015

APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

EISA CARD EDGE CONNECTOR
188 POSITIONS, SELECTIVE GOLD

TITLE	SIZE	PART NO.	SCALE	SHEET
	X	HDCE-188-G	NTS	1 OF 1
REV.				