

FEATURES

- Ultra Low Loss
- High Ruggedness
- High Short Circuit Capability
- Positive Temperature Coefficient
- With Fast Free-Wheeling Diodes

APPLICATIONS

- Invector
- Converter
- Welder
- SMPS and UPS
- Induction Heating



ABSOLUTE MAXIMUM RATINGS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Values	Unit
IGBT				
V_{CES}	Collector - Emitter Voltage		1200	V
V_{GES}	Gate - Emitter Voltage		± 20	V
I_C	DC Collector Current	$T_C=25^{\circ}\text{C}$	210	A
		$T_C=80^{\circ}\text{C}$	150	A
I_{Cpuls}	Pulsed Collector Current	$T_C=25^{\circ}\text{C}, t_p=1\text{ms}$	420	A
		$T_C=80^{\circ}\text{C}, t_p=1\text{ms}$	300	A
P_{tot}	Power Dissipation Per IGBT		1100	W
T_J	Junction Temperature Range		-40 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range		-40 to +125	$^{\circ}\text{C}$
V_{isol}	Insulation Test Voltage	AC, $t=1\text{min}$	3000	V
Free-Wheeling Diode				
V_{RRM}	Repetitive Reverse Voltage		1200	V
$I_{F(AV)}$	Average Forward Current	$T_C=25^{\circ}\text{C}$	180	A
		$T_C=80^{\circ}\text{C}$	120	A
$I_{F(RMS)}$	RMS Forward Current		180	A
I_{FSM}	Non-Repetitive Surge Forward Current	$T_J=45^{\circ}\text{C}, t=10\text{ms}, \text{Sine}$	860	A
		$T_J=45^{\circ}\text{C}, t=8.3\text{ms}, \text{Sine}$	900	A

MIMMG150DR120B

ELECTRICAL CHARACTERISTICS

T_C=25°C unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
IGBT						
V _{GE(th)}	Gate - Emitter Threshold Voltage	V _{CE} =V _{GE} , I _C =6mA	5	6.2	7	V
V _{CE(sat)}	Collector - Emitter Saturation Voltage	I _C =150A, V _{GE} =15V, T _J =25°C		1.8		V
		I _C =150A, V _{GE} =15V, T _J =125°C		2.0		V
I _{CES}	Collector Leakage Current	V _{CE} =1200V, V _{GE} =0V, T _J =25°C		0.4	1	mA
		V _{CE} =1200V, V _{GE} =0V, T _J =125°C		4		mA
I _{GES}	Gate Leakage Current	V _{CE} =0V, V _{GE} =±20V	-200		200	nA
Q _{ge}	Gate Charge	V _{CC} =600V, I _C =150A, V _{GE} =±15V		1550		nC
C _{ies}	Input Capacitance	V _{CE} =25V, V _{GE} =0V, f=1MHz		11		nF
C _{oes}	Output Capacitance			0.8		nF
C _{res}	Reverse Transfer Capacitance			0.52		nF
t _{d(on)}	Turn - on Delay Time	V _{CC} =600V, I _C =150A		150		ns
t _r	Rise Time	R _G =7.5 Ω, V _{GE} =±15V		65		ns
t _{d(off)}	Turn - off Delay Time	T _J =25°C		440		ns
t _f	Fall Time	Inductive Load		55		ns
t _{d(on)}	Turn - on Delay Time	V _{CC} =600V, I _C =150A		160		ns
t _r	Rise Time	R _G =7.5 Ω, V _{GE} =±15V		65		ns
t _{d(off)}	Turn - off Delay Time	T _J =125°C		500		ns
t _f	Fall Time	Inductive Load		70		ns
E _{on}	Turn - on Switching Energy	V _{CC} =600V, I _C =150A T _J =25°C		14.9		mJ
		R _G =7.5 Ω T _J =125°C		20.6		mJ
E _{off}	Turn - off Switching Energy	V _{GE} =±15V T _J =25°C		9.8		mJ
		Inductive Load T _J =125°C		15.6		mJ
Free-Wheeling Diode						
V _F	Forward Voltage	I _F =150A, V _{GE} =0V, T _J =25°C		2.0	2.48	V
		I _F =150A, V _{GE} =0V, T _J =125°C		1.7	2.20	V
t _{rr}	Reverse Recovery Time	I _F =150A, V _R =800V		240		ns
I _{RRM}	Max. Reverse Recovery Current	di _F /dt=-1000A/μs		85		A
Q _{rr}	Reverse Recovery Charge	T _J =125°C		10.5		μC

THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
R _{thJC}	Junction-to-Case Thermal Resistance	Per IGBT			0.11	K /W
R _{thJCD}	Junction-to-Case Thermal Resistance	Per Inverse Diode			0.27	K /W
Torque	Module-to-Sink	Recommended (M6)	3		5	N· m
Torque	Module Electrodes	Recommended (M6)	2.5		5	N· m
Weight				285		g

MIMMG150DR120B

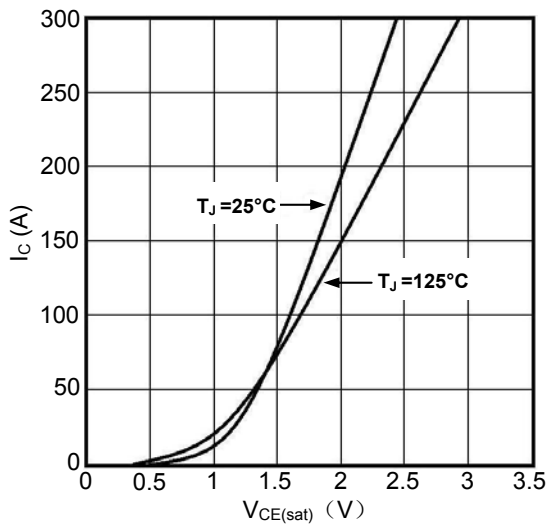


Figure1. Typical Output characteristics

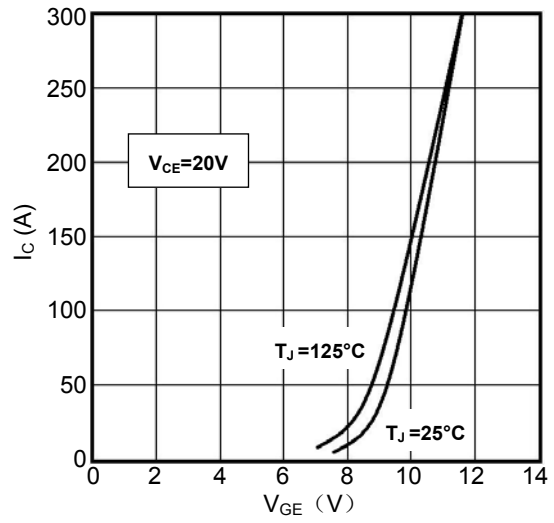


Figure2. Typical Transfer characteristics

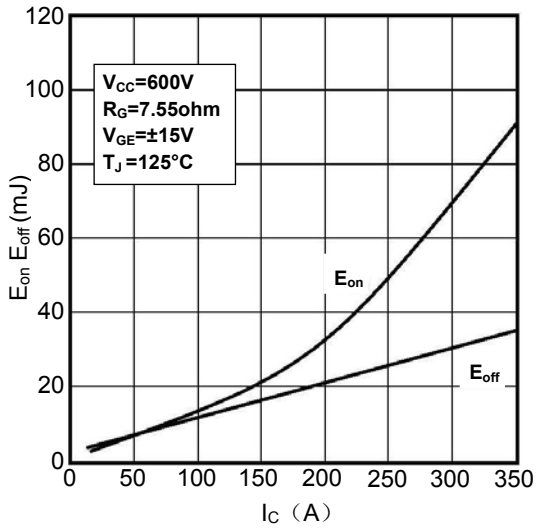


Figure3. Switching Energy vs. Collector Current

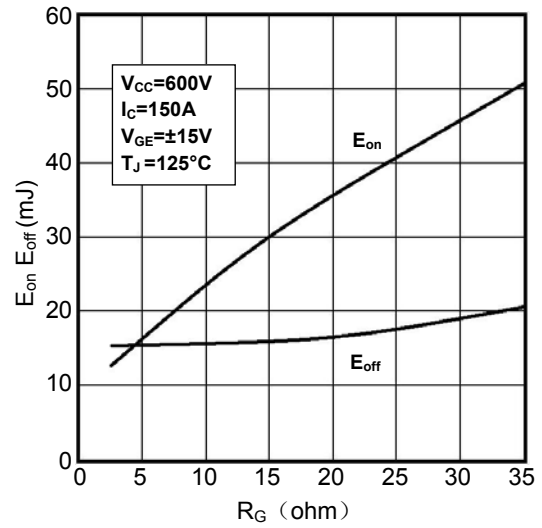


Figure4. Switching Energy vs. Gate Resistor

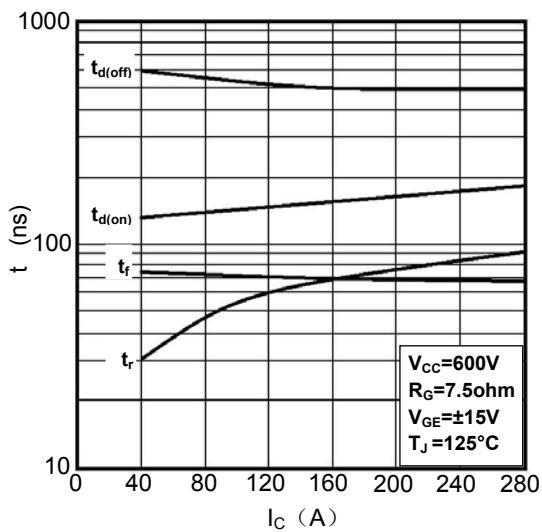


Figure5. Switching Times vs. Collector Current

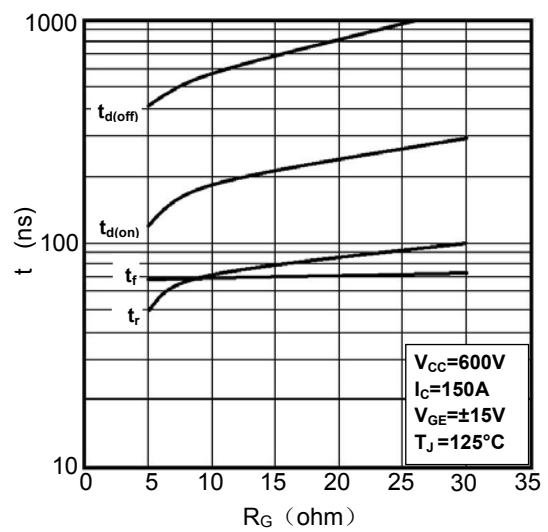


Figure6. Switching Times vs. Gate Resistor

MIMMG150DR120B

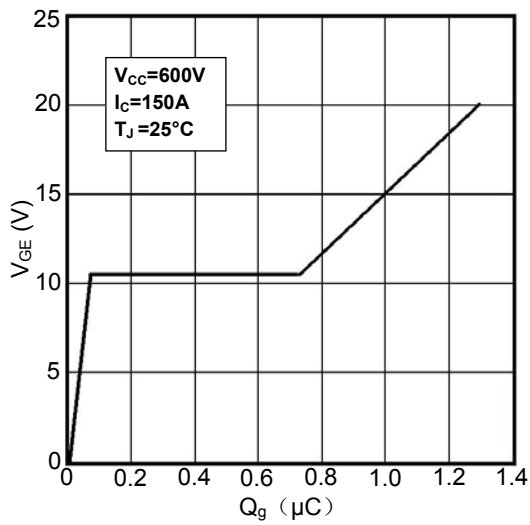


Figure 7. Gate Charge characteristics

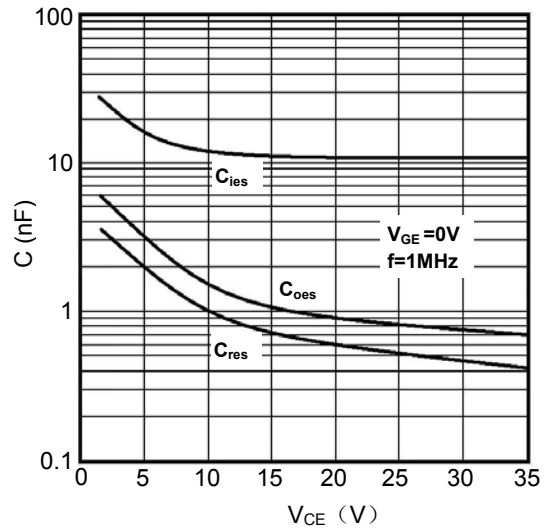


Figure 8. Typical Capacitances vs. V_{CE}

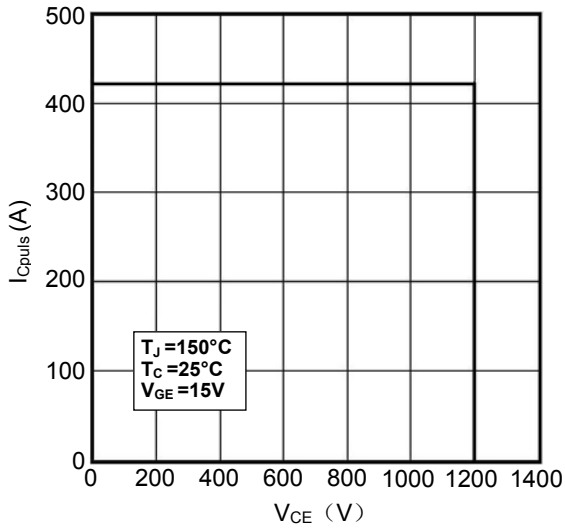


Figure 9. Reverse Biased Safe Operating Area

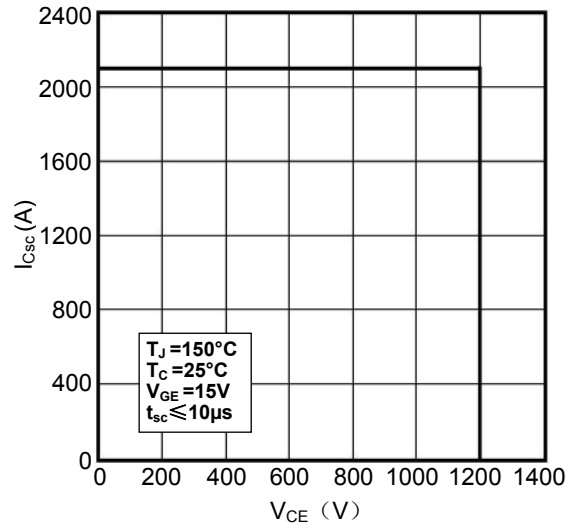


Figure 10. Short Circuit Safe Operating Area

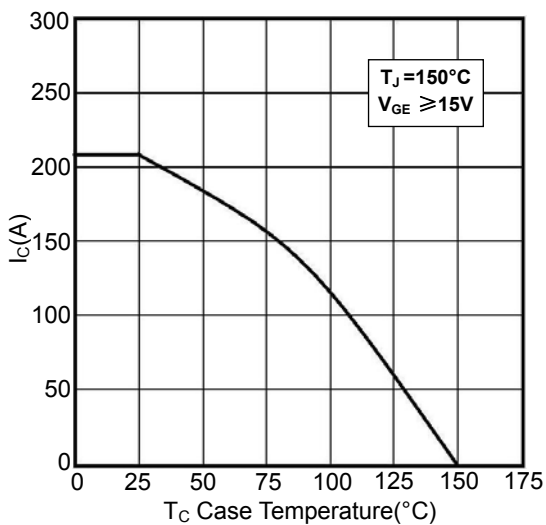


Figure 11. Rated Current vs. T_C



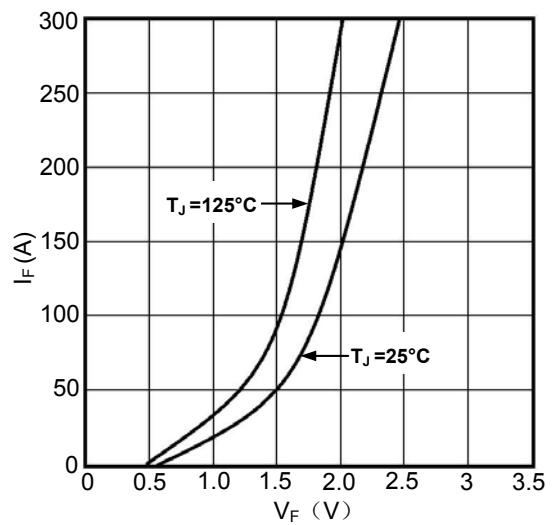


Figure 12. Diode Forward Characteristics

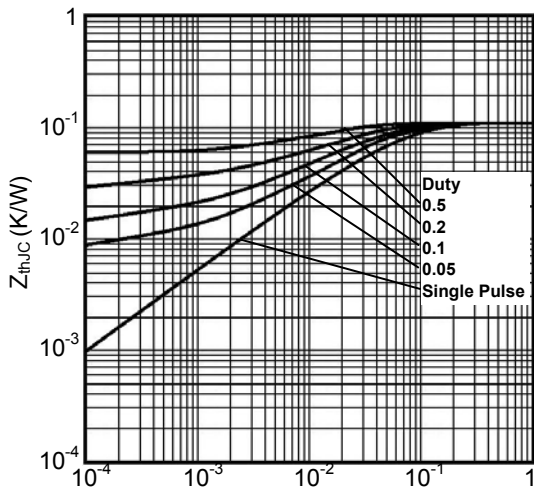

Rectangular Pulse Duration (seconds)
Figure13. Transient Thermal Impedance of IGBT

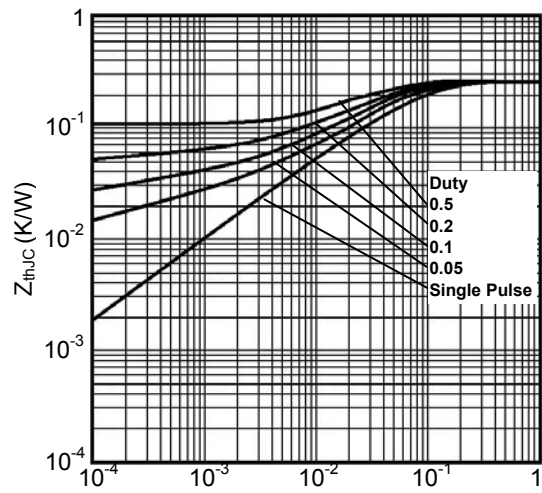

Rectangular Pulse Duration (seconds)
Figure14. Transient Thermal Impedance of Diode

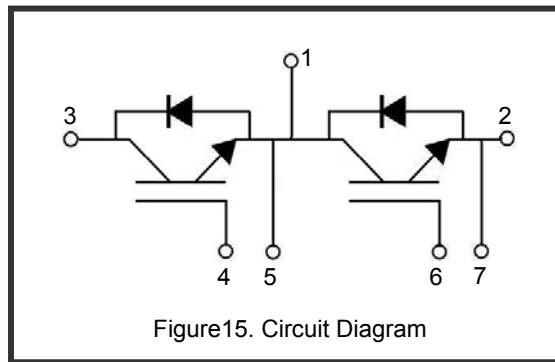


Figure15. Circuit Diagram

