

SM520B THRU SM5100B



5.0 AMP SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS



FEATURES

- * Ideal for surface mount applications
- * Easy pick and place
- * Built-in strain relief
- * Low forward voltage drop

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Metallurgically bonded construction
- * Polarity: Color band denotes cathode end
- * Mounting position: Any


VOLTAGE RANGE

20 to 100 Volts

CURRENT

5.0 Amperes

DO-214AA(SMB)

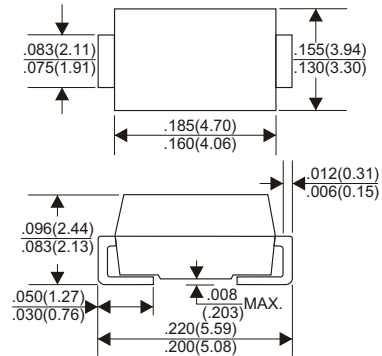

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	SM520B	SM530B	SM540B	SM550B	SM560B	SM580B	SM5100B	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	100	V
Maximum RMS Voltage	14	21	28	35	42	56	70	V
Maximum DC Blocking Voltage	20	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current at $T_L=90^\circ\text{C}$	5.0							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	150							A
Maximum Instantaneous Forward Voltage at 5.0A	0.55		0.75		0.85		V	
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_a=25^\circ\text{C}$			0.5			mA	
	$T_a=100^\circ\text{C}$			20			mA	
Typical Junction Capacitance (Note 1)	300			pF				
Typical Thermal Resistance $R_{\theta JL}$ (Note 2)	10			$^\circ\text{C/W}$				
Operating Temperature Range T_j	-65 — +150			$^\circ\text{C}$				
Storage Temperature Range T_{stg}	-65 — +150			$^\circ\text{C}$				

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Lead.

RATING AND CHARACTERISTIC CURVES (SM520B THRU SM5100B)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

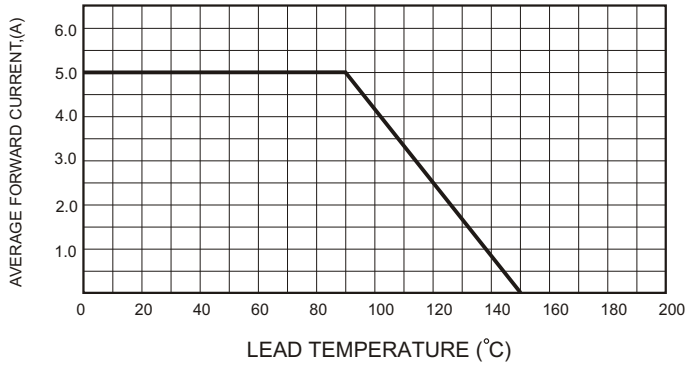


FIG.2-TYPICAL FORWARD CHARACTERISTICS

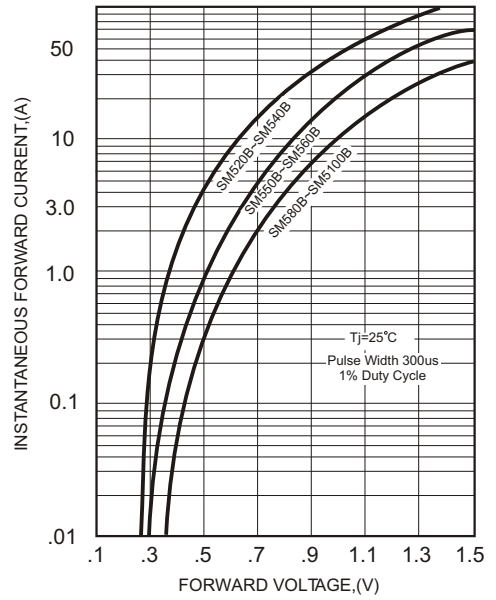


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

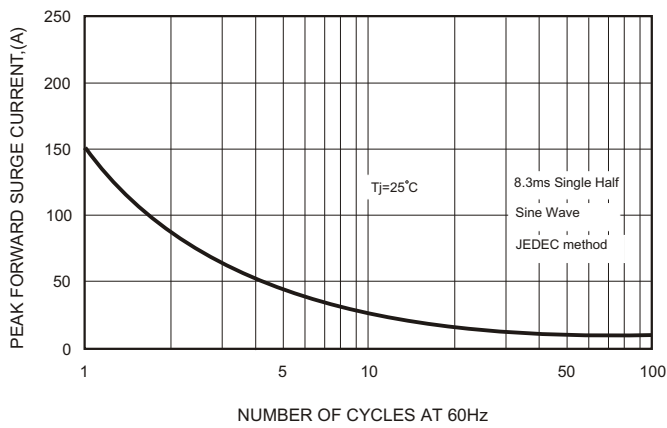


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

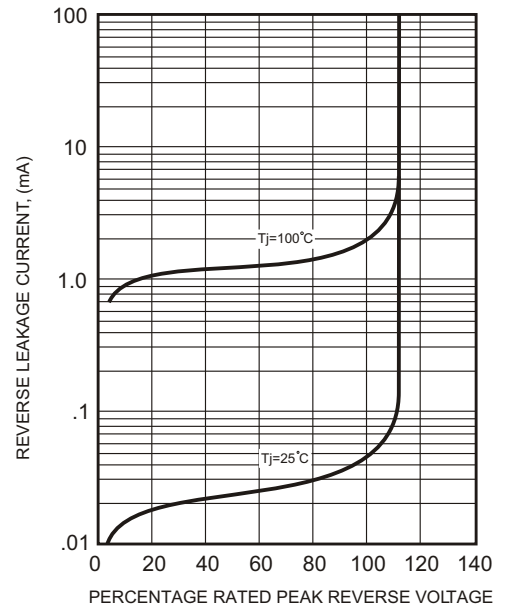


FIG.4-TYPICAL JUNCTION CAPACITANCE

