



# SAW Components

## SAW duplexer

LTE band XXVIII Block B


<b>Series/type:</b>	<b>B8539</b>
<b>Ordering code:</b>	<b>B39791B8539P810</b>
<b>Date:</b>	<b>December 16, 2014</b>
<b>Version:</b>	<b>2.0</b>

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.


EPCOS AG is a TDK Group Company.

**Application**


- Low-loss SAW duplexer for mobile telephone LTE Band XXVIII systems
- Low insertion attenuation
- Usable passband 30 MHz
- Duplexer for higher part of Band XXVIII (Block B)
- Companion type is B8538/B8540 for lower Band XXVIII (Block A)

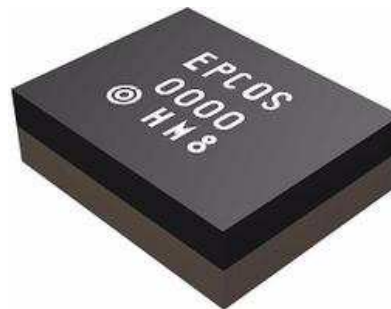
**Features**

- Package size 1.8 x 1.4mm<sup>2</sup>, package height 0.475mm max.
- RoHS compatible
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitive Level 3**

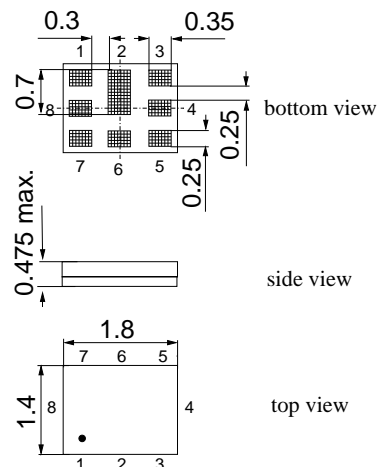
**Pin configuration**

- 1 RX output
- 3 TX input
- 6 Antenna
- 2,4,5,7,8 Ground

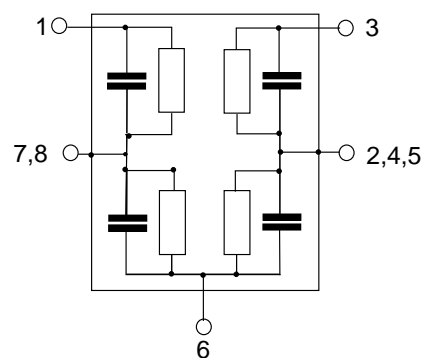

**DataSheet**

**Characteristics**

Temperature range for specification:	T = -20 °C to +90 °C
ANT terminating impedance:	Z <sub>ANT</sub> = 50 Ω    6.0 nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω + 4.0 nH (series)
RX terminating impedance:	Z <sub>RX</sub> = 50 Ω

Characteristics Tx - Ant		min.	typ. @ 25 °C	max.	
<b>Center frequency</b>	f <sub>C</sub>	—	733.0	—	MHz
<b>Maximum insertion attenuation</b>	α				
	718.240... 747.760MHz		1.9	2.8	dB
<b>Amplitude ripple</b>	α				
	718.240... 747.760MHz		1.0	1.9	dB
<b>VSWR</b>					
TX port	718.0 ... 748.0 MHz		1.7	2.0	
ANT port	718.0 ... 748.0 MHz		1.4	2.0	
<b>Attenuation</b>	α				
	10.0 ... 698.0 MHz	30	38		dB
	698.0 ... 710.0 MHz	15	38		dB
	758.240... 772.760MHz	15	30		dB
	773.240... 802.760MHz	41	44		dB
	859.0 ... 894.0 MHz	30	38		dB
	1225.0 ... 1250.0 MHz	40	47		dB
	1436.0 ... 1510.0 MHz	35	40		dB
	1559.0 ... 1563.0 MHz	35	39		dB
	1565.42 ... 1573.374MHz	35	39		dB
	1573.374... 1577.466MHz	35	39		dB
	1577.466... 1585.42 MHz	35	39		dB
	1597.55 ... 1605.89 MHz	35	39		dB
	1805.0 ... 1880.0 MHz	30	37		dB
	1930.0 ... 1995.0 MHz	30	36		dB
	2010.0 ... 2025.0 MHz	30	36		dB
	2154.0 ... 2244.0 MHz	30	35		dB
	2400.0 ... 2484.0 MHz	28	34		dB
	2570.0 ... 2620.0 MHz	28	34		dB
	2872.0 ... 2992.0 MHz	15	33		dB
	4900.0 ... 5950.0 MHz	15	23		dB

<b>SAW Components</b>	<b>B8539</b>
<b>SAW duplexer</b>	<b>733.0 / 788.0 MHz</b>

**DataSheet**

**Characteristics**

Temperature range for specification:	T = -20 °C to +90 °C
ANT terminating impedance:	Z <sub>ANT</sub> = 50 Ω    6.0 nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω + 4.0 nH (series)
RX terminating impedance:	Z <sub>RX</sub> = 50 Ω

<b>Characteristics Rx - Ant</b>		<b>min.</b>	<b>typ. @ 25 °C</b>	<b>max.</b>	
<b>Center frequency</b>	f <sub>C</sub>	—	788.0	—	MHz
<b>Maximum insertion attenuation</b>	α				
773.240... 802.760MHz			2.1	2.8	dB
<b>Amplitude ripple</b>	α				
773.240... 802.760MHz			0.7	1.4	dB
<b>VSWR</b>					
RX port 773.0 ... 803.0 MHz			1.8	2.2	
ANT port 773.0 ... 803.0 MHz			1.4	2.2	
<b>Attenuation</b>	α				
1.0 ... 699.0 MHz		40	62		dB
45.0 ... 65.0 MHz		50	70		dB
703.240... 732.760MHz		30	71		dB
718.240... 747.760MHz		50	61		dB
824.0 ... 6000.0 MHz		26	30		dB
<b>Characteristics TX - RX</b>		<b>min.</b>	<b>typ. @ 25 °C</b>	<b>max.</b>	
<b>Isolation</b>	α				
718.240... 747.760MHz		60	64		dB
773.240... 802.760MHz		54 <sup>1)</sup>	57		dB


1) 53 dB for T= -20°C to +20°C

**Maximum ratings**


Storage temperature range	T <sub>stg</sub>	-40/+85 <sup>1)</sup>	°C	
DC voltage	V <sub>DC</sub>	5	V	
ESD voltage	V <sub>ESD</sub>	100 <sup>2)</sup>	V	machine model, 10 pulses
ESD voltage	V <sub>ESD</sub>	300 <sup>3)</sup>	V	HBM,+/- 1 pulses
ESD voltage	V <sub>ESD</sub>	600 <sup>4)</sup>	V	CDM,+/- 3 pulses
Input power at	P <sub>IN</sub>			
718.0 ... 748.0 MHz		29	dBm	} continuous wave 50 °C, 5000 h
elsewhere		10	dBm	

- 1) Extended upperlimit: 168 @ 125°C acc. to IEC 60068-2-2 Bb.
- 2) acc. to JESD22-A115B (machine model), 10 negative & 10 positive pulses.
- 3) acc. to JESD22-A114F (human body model), 1 negative & 1 positive pulses.
- 4) acc. to JESD22-A101C (charge device model), 3 negative & 3 positive pulse


**Frequency response Tx-Antenna**

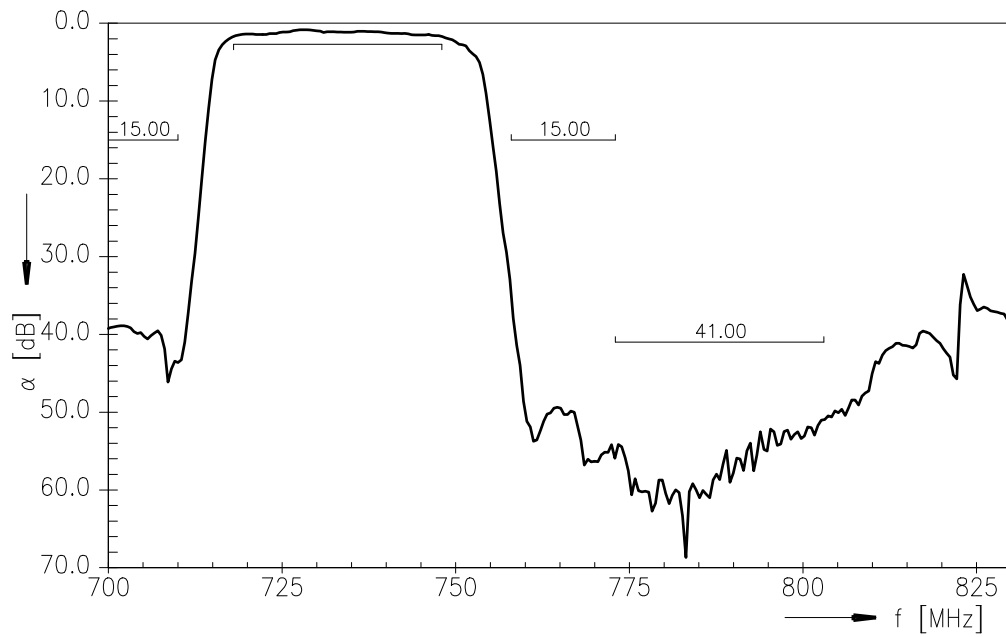


**Frequency response Tx-Antenna (wideband)**

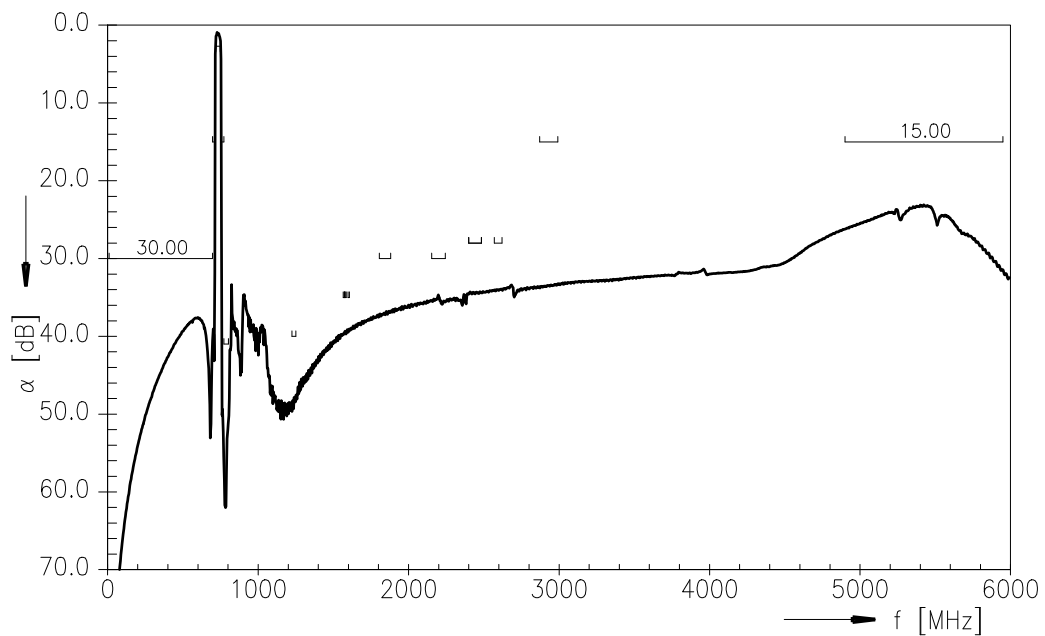


**Frequency response Antenna-Rx**

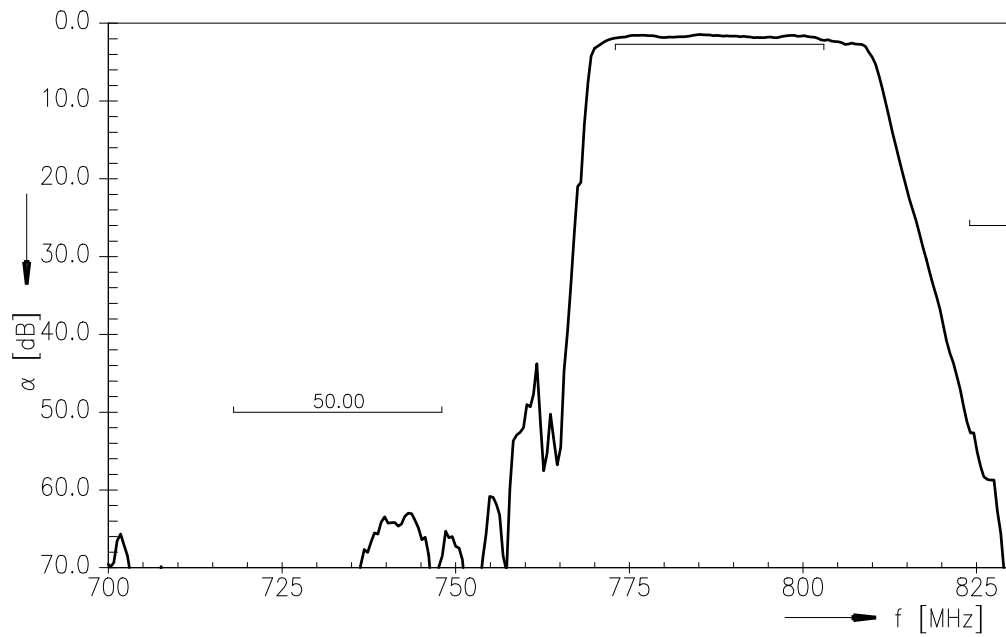


**Frequency response Antenna-Rx (wideband)**

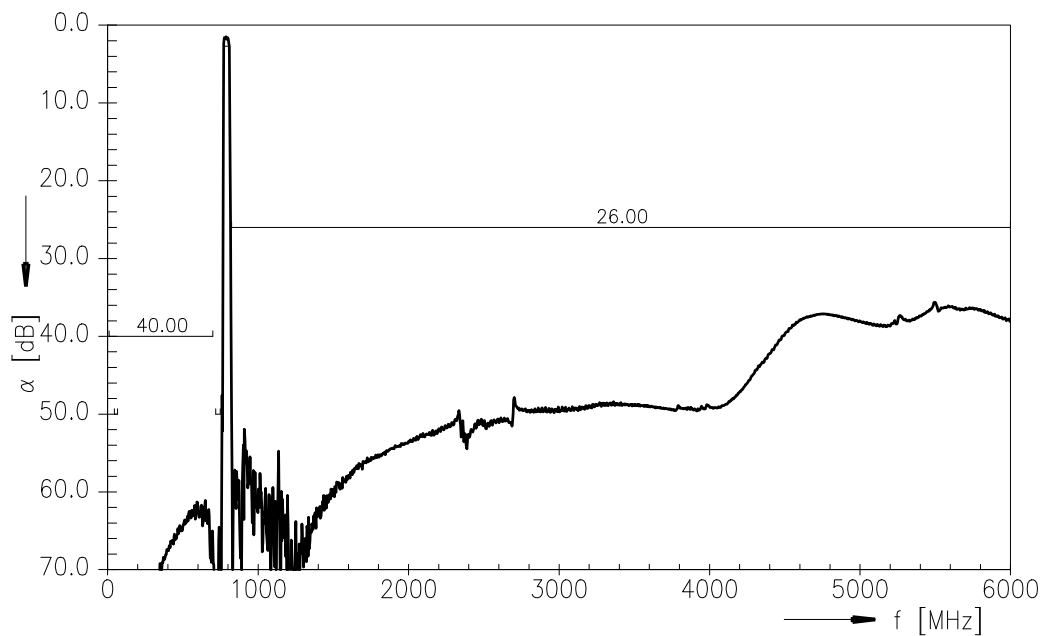

**Frequency response Tx-Rx (Power transfer function)**

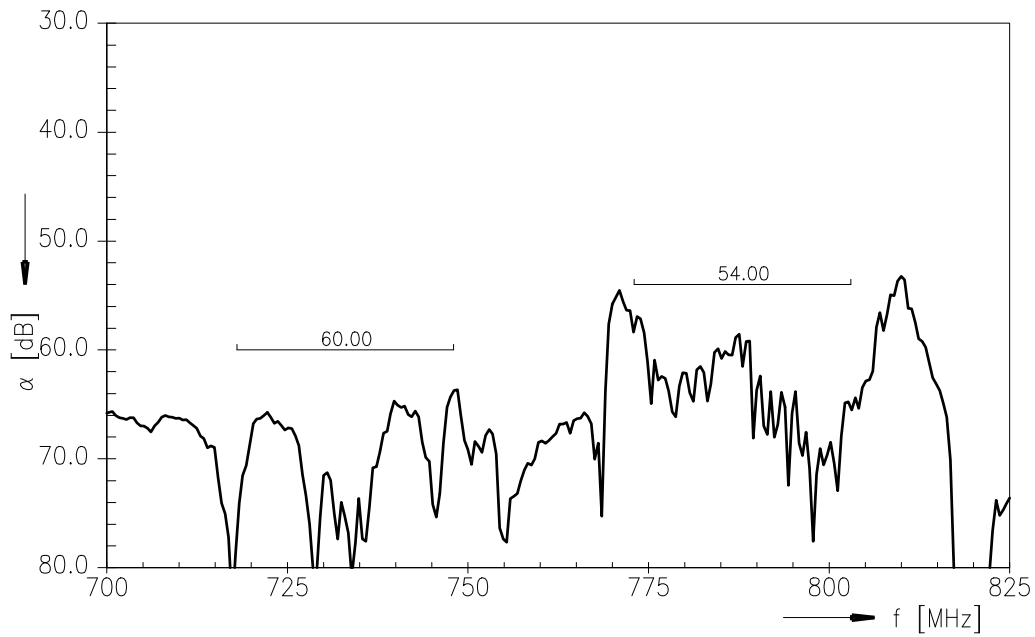

**Frequency response Tx-Rx (wideband)**

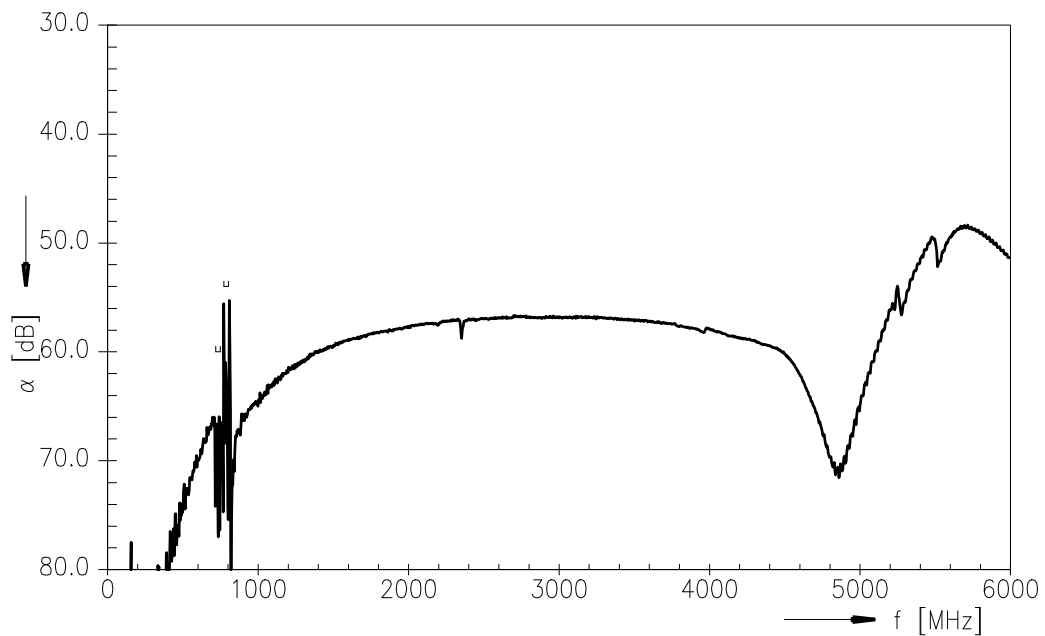



**DataSheet**









**Return loss**

**S<sub>11</sub> Tx-port**

**S<sub>22</sub> Antenna-port**

**S<sub>33</sub> Rx-portReferences**

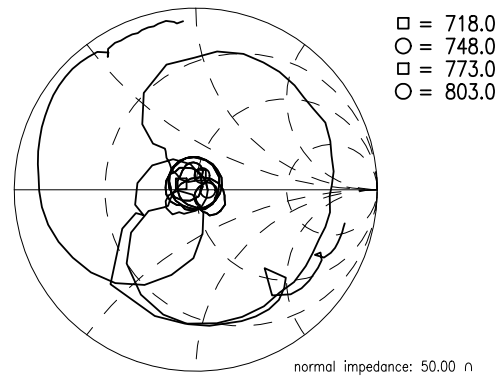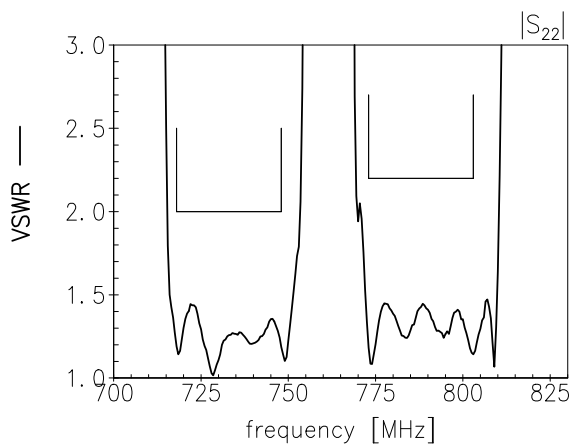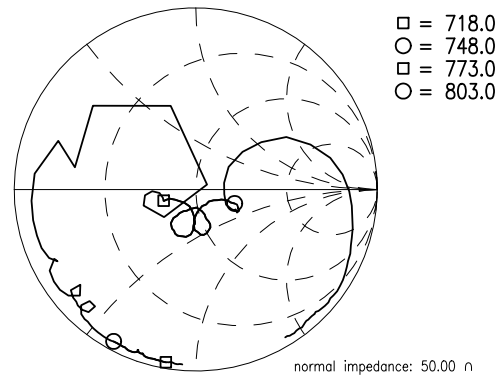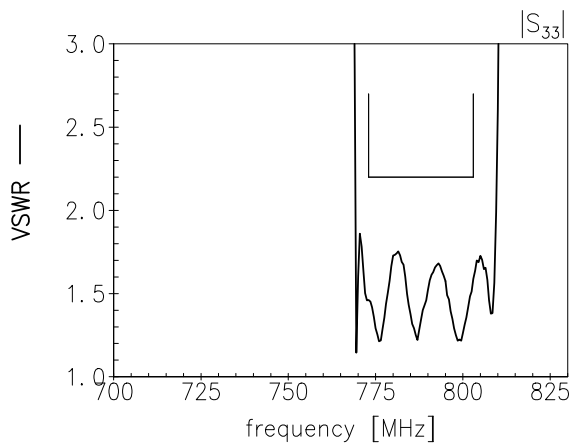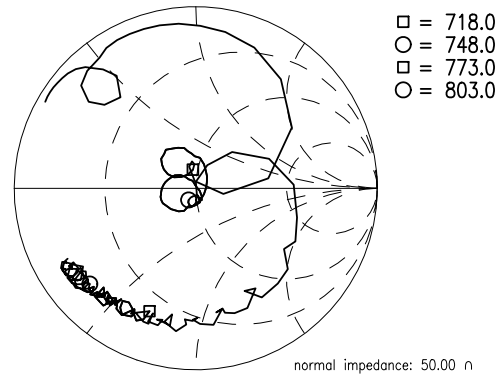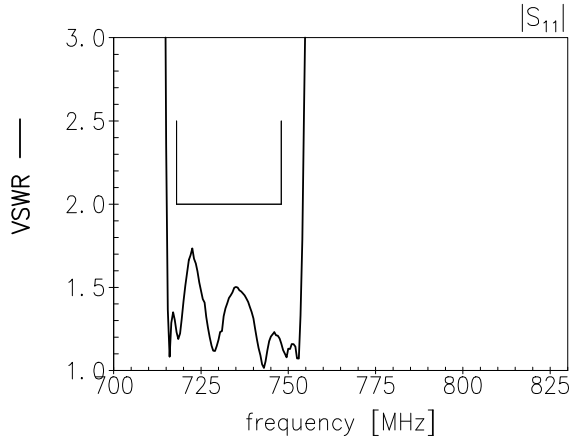

Please read *cautions and warnings and important notes* at the end of this document.

<b>SAW Components</b>	<b>B8539</b>
<b>SAW duplexer</b>	<b>733.0 / 788.0 MHz</b>

DataSheet



#### References

<b>Type</b>	B8539
<b>Ordering code</b>	B39791B8539P810
<b>Marking and package</b>	C61157-A8-A79
<b>Packaging</b>	F61074-V8259-Z000
<b>Date codes</b>	L_1126
<b>S-parameters</b>	B8539_NB_UN.s3p, B8539_WB_UN.s3p See file header for pin/port assignment.
<b>Soldering profile</b>	S_6001
<b>RoHS compatible</b>	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 <sup>th</sup> , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
<b>Moldability</b>	Before using in overmolding environment, please contact your EPCOS sales office.
<b>Matching coils</b>	See Inductor pdf-catalog <a href="http://www.tdk.co.jp/tefe02/coil.htm#aname1">http://www.tdk.co.jp/tefe02/coil.htm#aname1</a> and Data Library for circuit simulation <a href="http://www.tdk.co.jp/etvcl/index.htm">http://www.tdk.co.jp/etvcl/index.htm</a>

For further information please contact your local EPCOS sales office or visit our webpage at [www.epcos.com](http://www.epcos.com).

**Published by EPCOS AG**  
**Systems, Acoustics, Waves Business Group**  
**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2014. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, TFAP, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).