
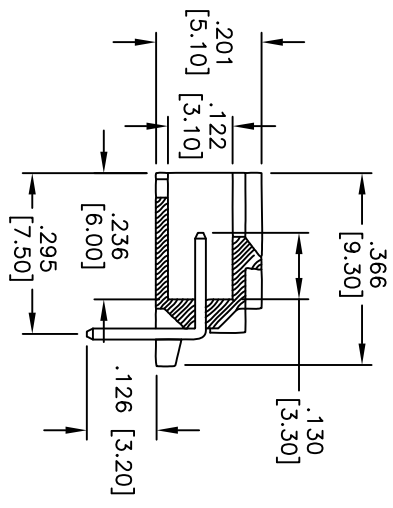
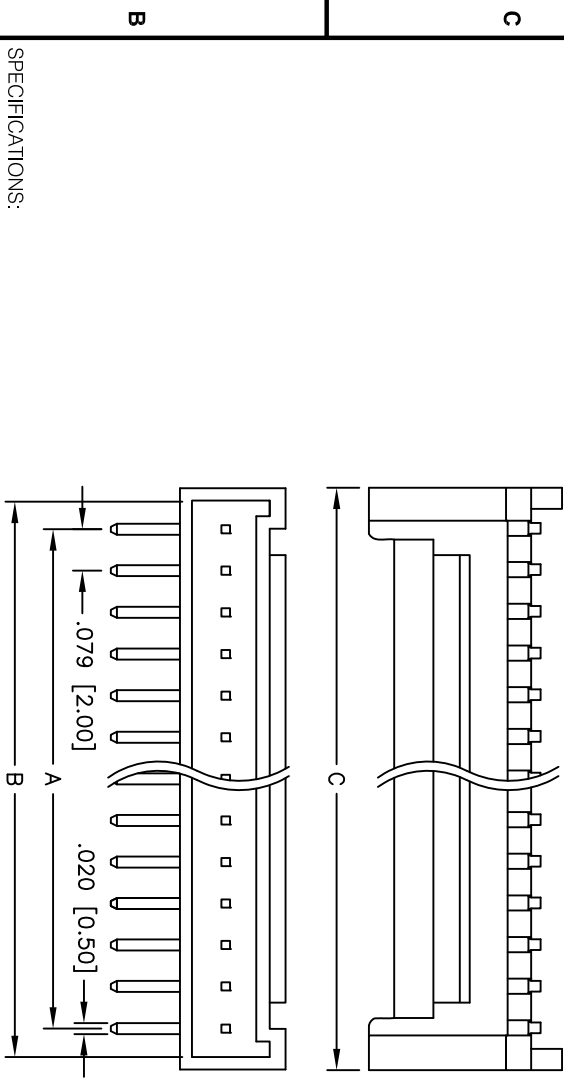


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/17/10	

APPROVED: _____
 DATE: _____ TITLE: _____

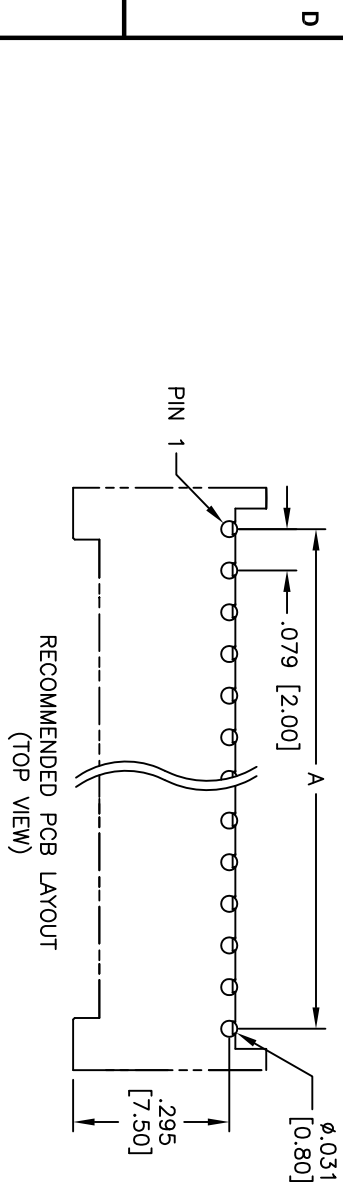

Positions: 2 thru 16
 A = .079 [2.00] x No. of Spaces
 B = .079 [2.00] x No. of Spaces + .108 [2.75]
 C = .079 [2.00] x No. of Spaces + .157 [4.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLEES [MM]

.X ± .10 ØX ± .10
 .XX ± .020 ØXX ± .015
 .XXX ± .015 ØXXX ± .010

SPECIFICATIONS:
 Material: Insulator: Nylon 66, rated UL 94V-0
 Insulator color: White
 Contacts: Brass
 Plating: Matt Tin over Nickel underplate overall
 Electrical:
 Operating voltage: 250V AC/DC
 Current rating: 3A AC/DC
 Contact resistance: 30 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



DRAWN	DY	11/17/10	SIZE	PART NO.	REV.
CHECKED			X	2SH-K-XX-MTR-HF	
APPROVED			REF: S00123T	SCALE: NTS	SHEET 1 OF 1

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] SHRROUDED HEADER
 RIGHT ANGLE, PCB, HALOGEN-FREE