

# SPECIFICATION

Part No. : **FW.90.SMA.M**  
 Product Name : Flexible Whip Monopole Antenna  
 LTE/Cellular/CDMA Antenna For  
 2G/3G/4G Applications  
 698~960MHz 1710~2690Mhz  
 Features : IP67  
 Robust Inner Steel Core  
 SMA(M) Connector  
 RoHS ✓

FW.90 Whip  
Antenna



FW.90 Whip  
Mounted on a  
Bracket –  
WM.90



FW.90  
SMA(M)  
Connector



## 1. Introduction

The FW.90 is a flexible cellular whip antenna with IP67 housing. It has a wide response and high peak gain. Ideal for outdoor environments which require high gain, on both lower and upper bands. It's unique characteristic is it has stable above 2dBi peak gain on all five common 2G/3G GSM/CDMA cellular bands used worldwide (when attached to a 30cm\*30cm metal plate). The antenna radiates best attached to a metal plate but it can still perform without as evidenced by the table below.

For a waterproof integration to a metal box a waterproof panel mount SMA connector or cable assembly can be provided. TNC and N type antenna versions also available.

The FW.90 can be used with a Wall Mounting Bracket, and we have designed an L Shaped Bracket for use with the Whip Antenna, the part number for this option is [WM.90.A305111](#). Testing of the whip antenna on the bracket, in free-space, and on a reference ground-plane has been done to show the benefit of the L-bracket.

This antenna delivers wider coverage areas and more reliable connections for professional customers in the automotive, industrial industries. The whip is made up of a flexible inner steel core covered by TPU so extremely resistant to collisions and maintaining its original shape and RF performance. The whip and the connection internally to the bracket is completely IP67 waterproof.

The bracket allows complete concealment of the cable for a more secure integration and cleaner installation. The cable can also be routed out of the back wall of the bracket into the interior of the mounting wall for added security against vandalism. The standard version comes with 3M extremely low loss CFD200 (0.3dB against 0.7dB for RG58) to allow for flexibility of placement.


Customized frequency and gain versions can be supplied.

## 2. Specification


CELLULAR							
Frequency (MHz)	698 ~ 798	824 ~ 896	880 ~ 960	1710 ~ 1880	1850 ~ 1990	1710 ~ 2170	2570 ~ 2690
Peak Gain (dBi)							
Free Space	-2.11	-1.30	-0.27	2.45	3.35	2.83	3.45
On 30cm*30cm GND	-2.75	-0.84	2.02	4.65	5.09	4.55	4.65
L - Bracket	-1.11	2.53	1.80	1.81	2.23	2.22	1.80
Average Gain (dBi)							
Free Space	-6.30	-5.33	-4.59	-1.85	-1.51	-1.73	-2.13
On 30cm*30cm GND	-5.76	-4.62	-3.03	-1.73	-1.44	-1.69	-1.84
L - Bracket	-5.58	-2.33	-2.44	-2.71	-3.03	-2.75	-2.88
Efficiency (%)							
Free Space	23.49	29.32	35.08	65.41	70.84	67.30	61.58
On 30cm*30cm GND	26.60	34.93	50.32	67.30	71.81	67.94	65.54
L - Bracket	27.92	58.66	57.15	53.86	49.86	53.24	51.59
Return Loss (dB)	<-3	<-6	<-4	<-5	<-5	<-6	<-6
Impedance	50Ω						
Polarization	Linear						
Radiation Pattern	Omni						
Input Power	2 W						
MECHANICAL							
Dimensions	Height 248 ± 5 mm						
Base Diameter	17.08 ± 0.2 mm						
Whip Diameter	4 ± 0.2 mm						
Casing	ABS						
Connector	SMA Male						
Weight	420g						
ENVIRONMENTAL							
Temperature Range	-40°C to 85°C						
Humidity	Non-condensing 65°C 95% RH						

### 3. Antenna Characteristics


#### 3.1. Return Loss

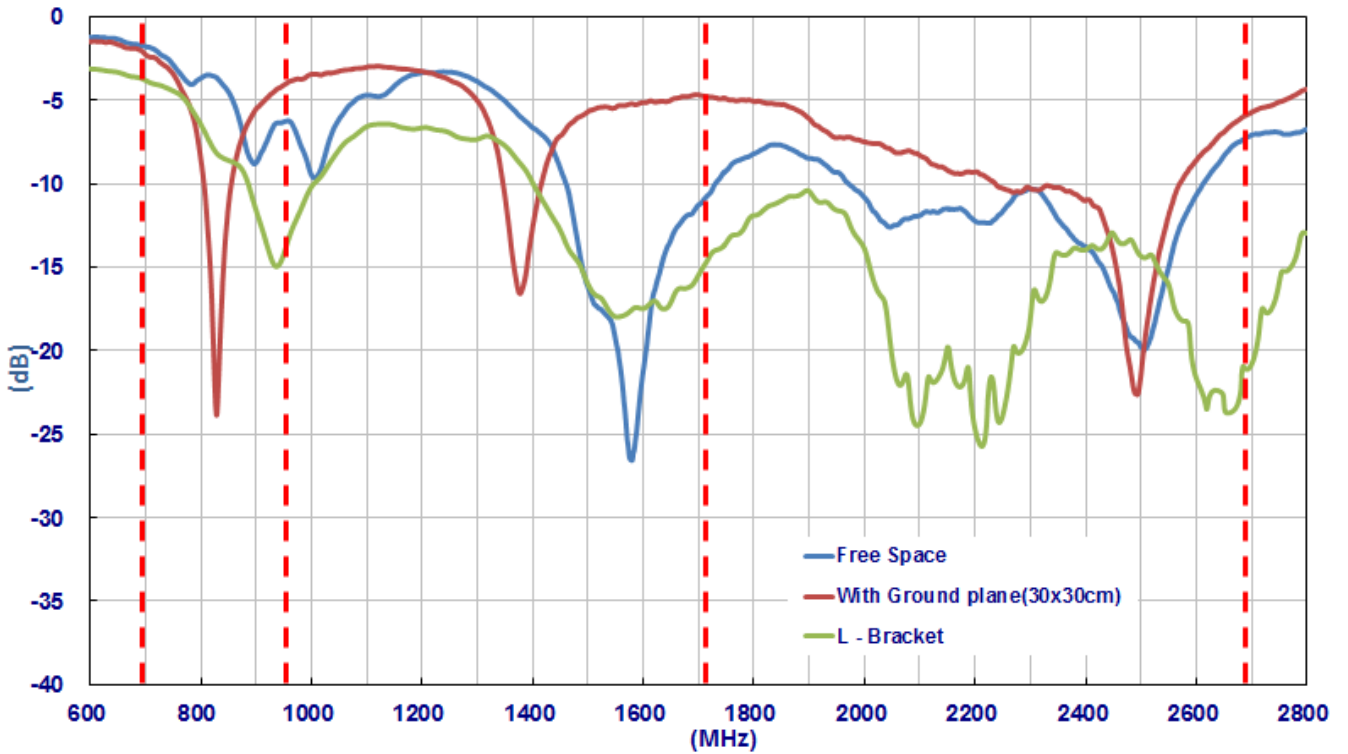

#### 3.2. Antenna Efficiency

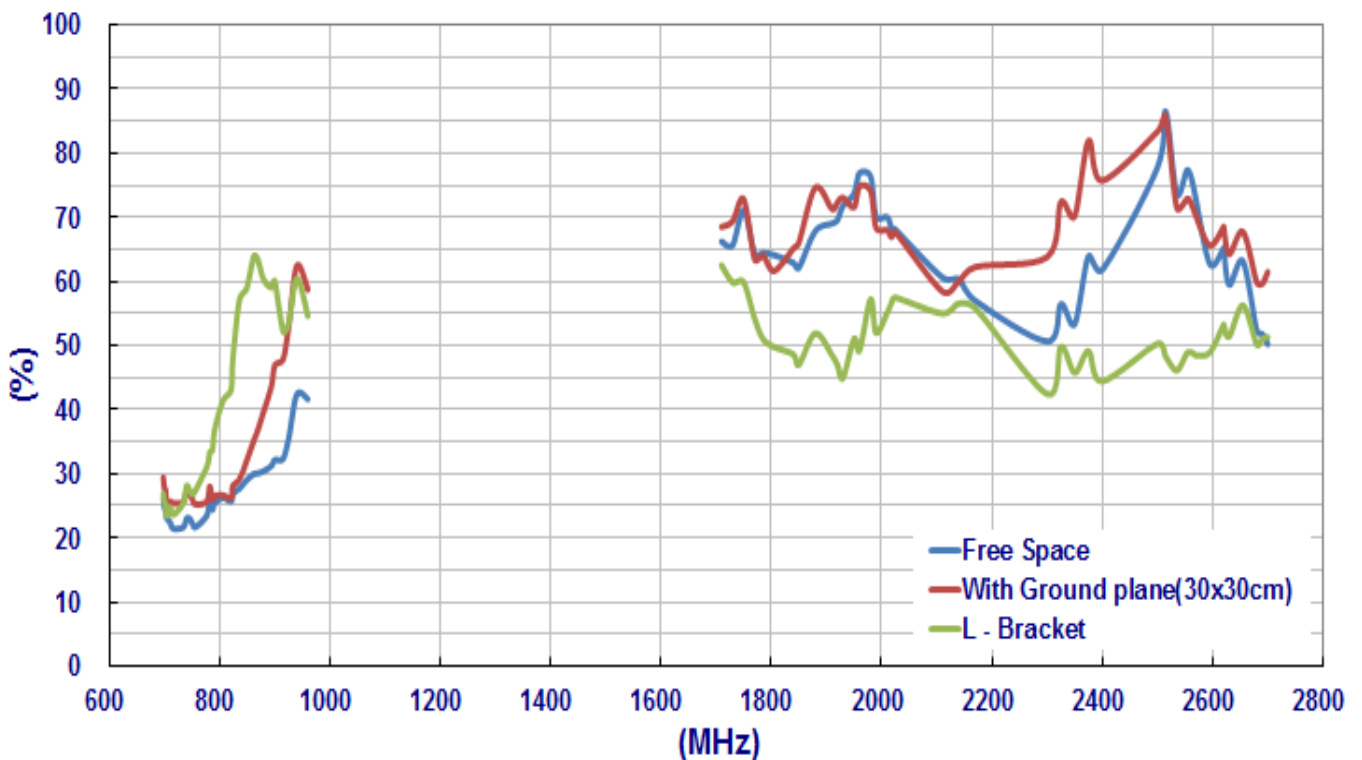


### 3.3. Peak Gain


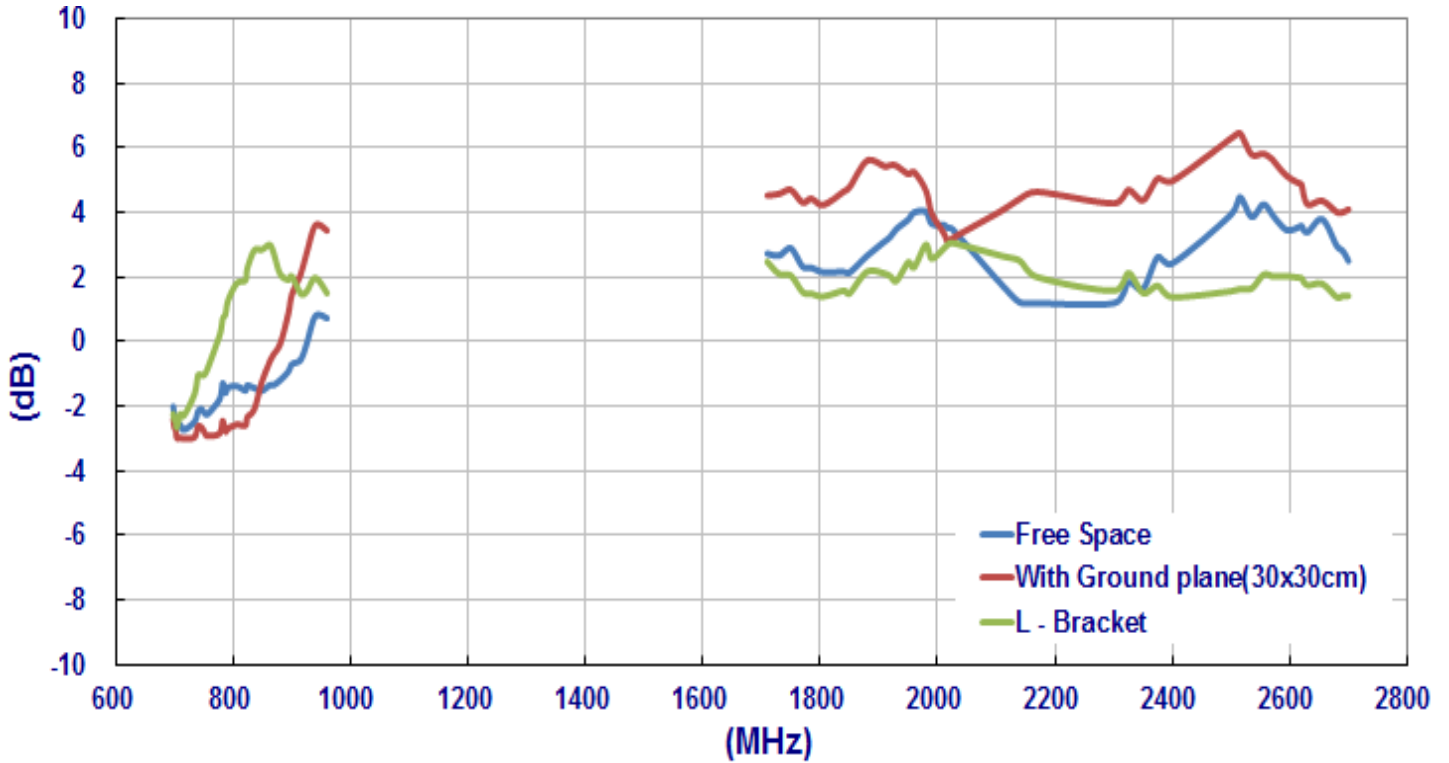



## 4. Antenna Radiation Pattern

### 4.1. Antenna Stand Alone

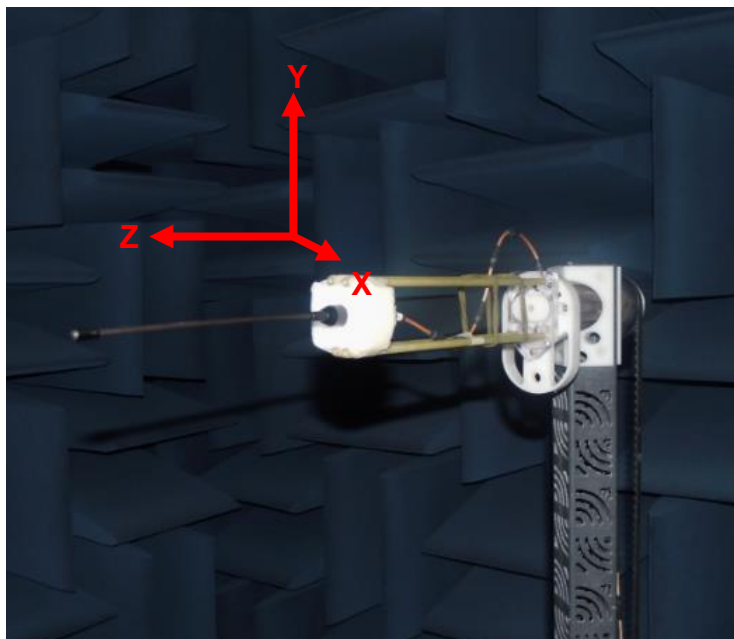




### XY-plane

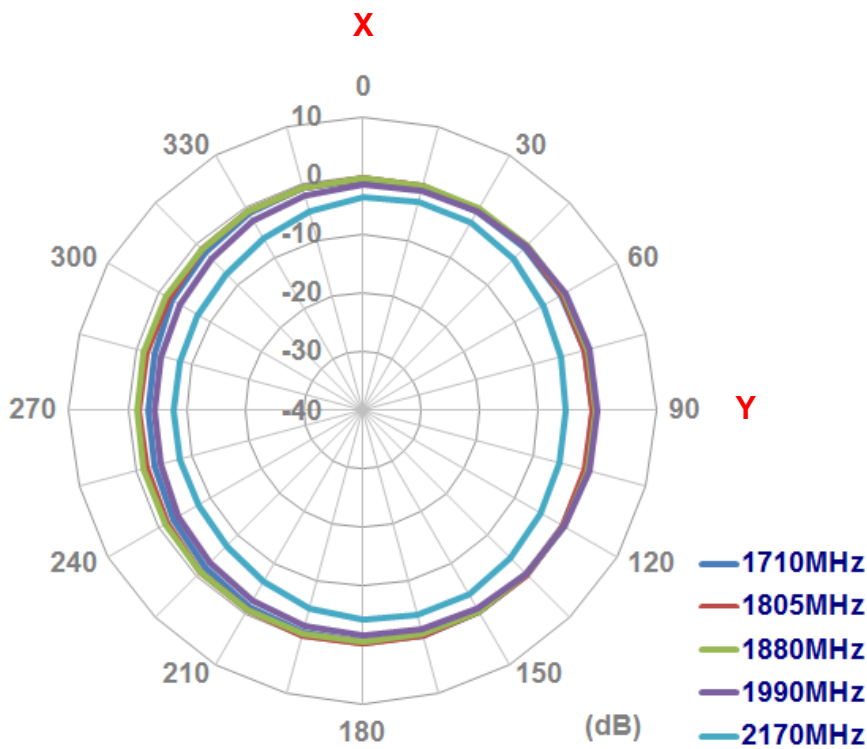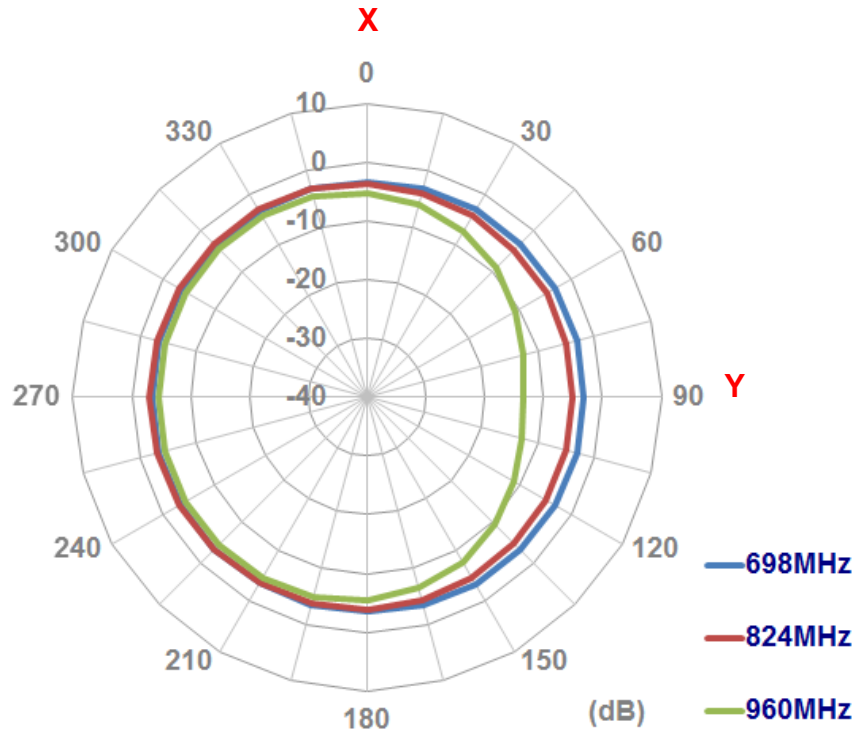

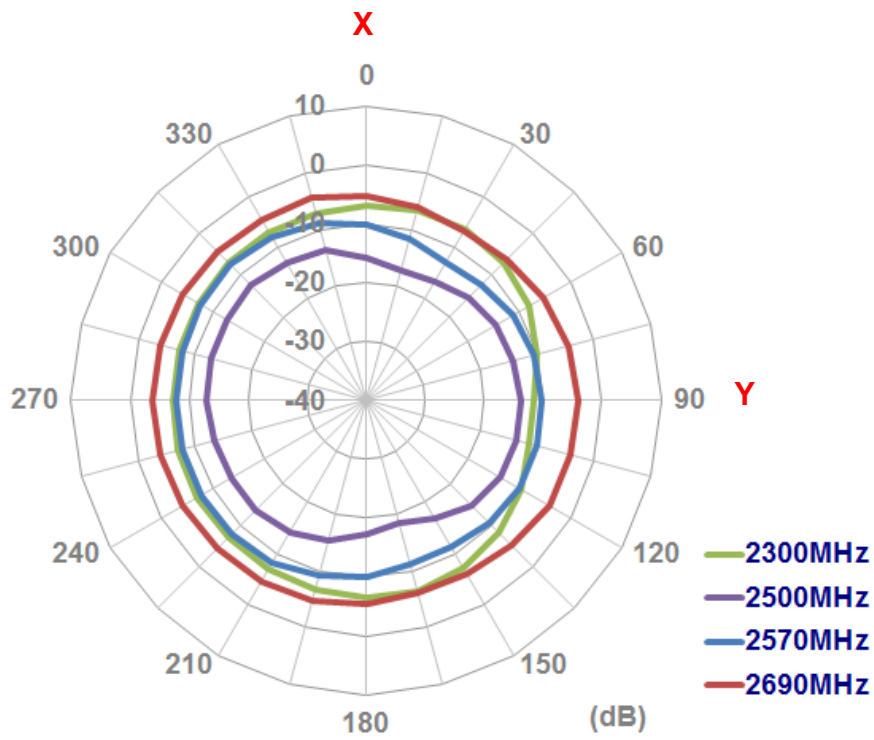


**XZ-plane**

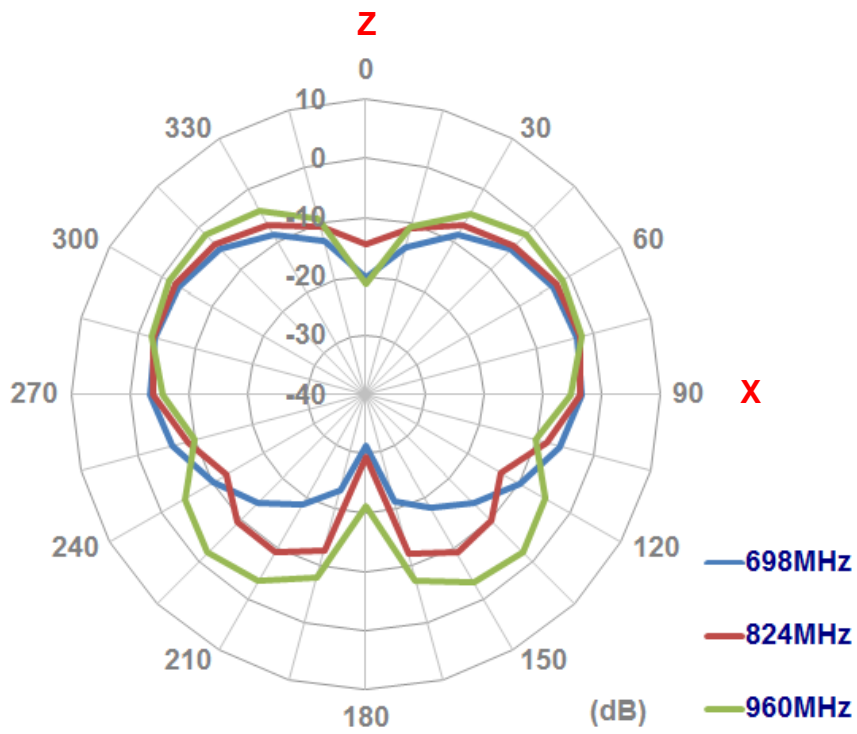

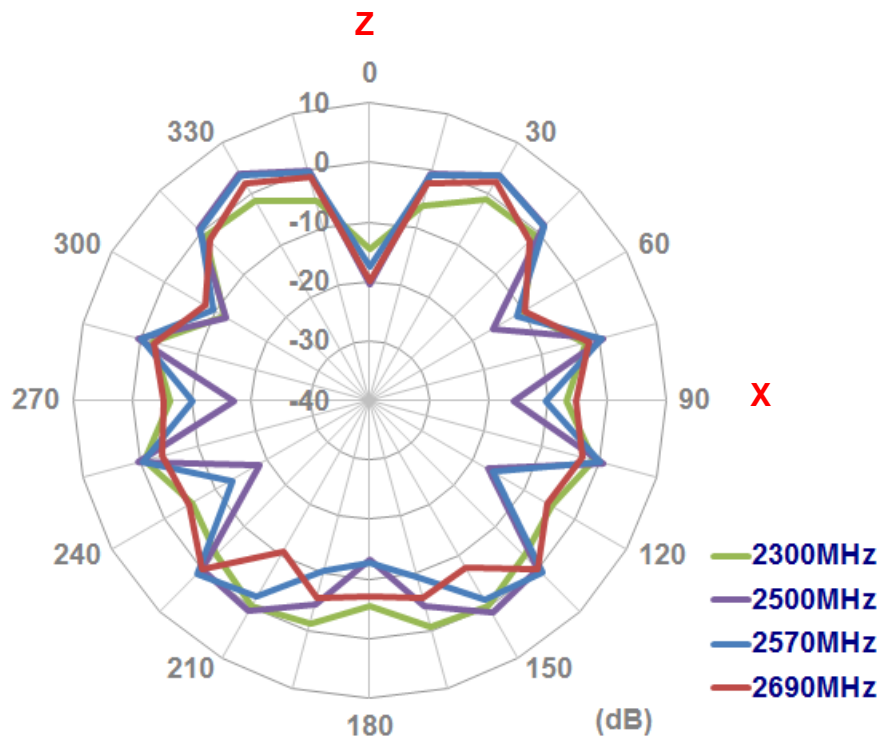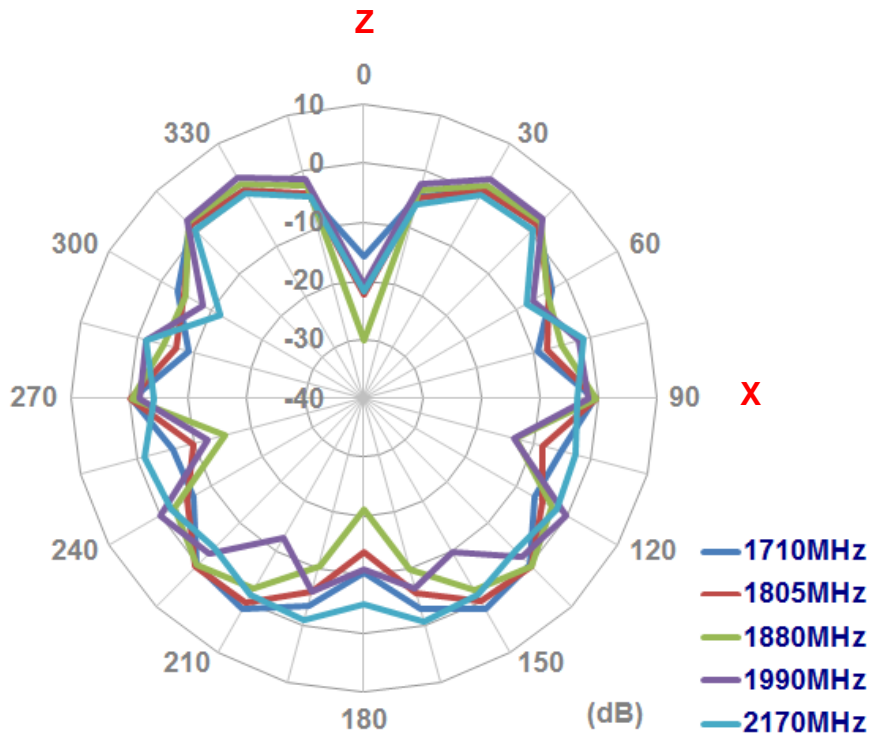






## 4.2. Antenna with Ground plane (30X30cm)


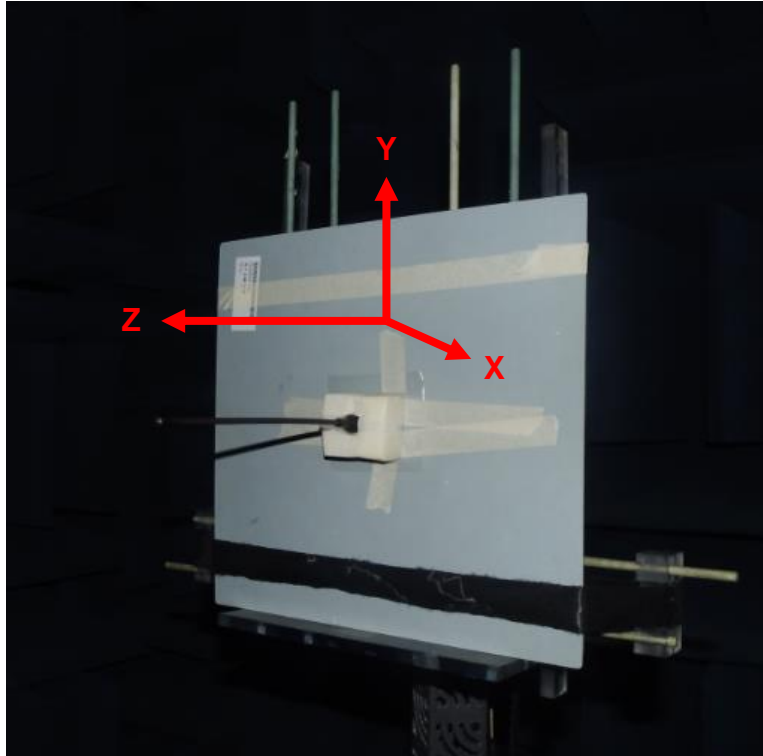



XY-plane

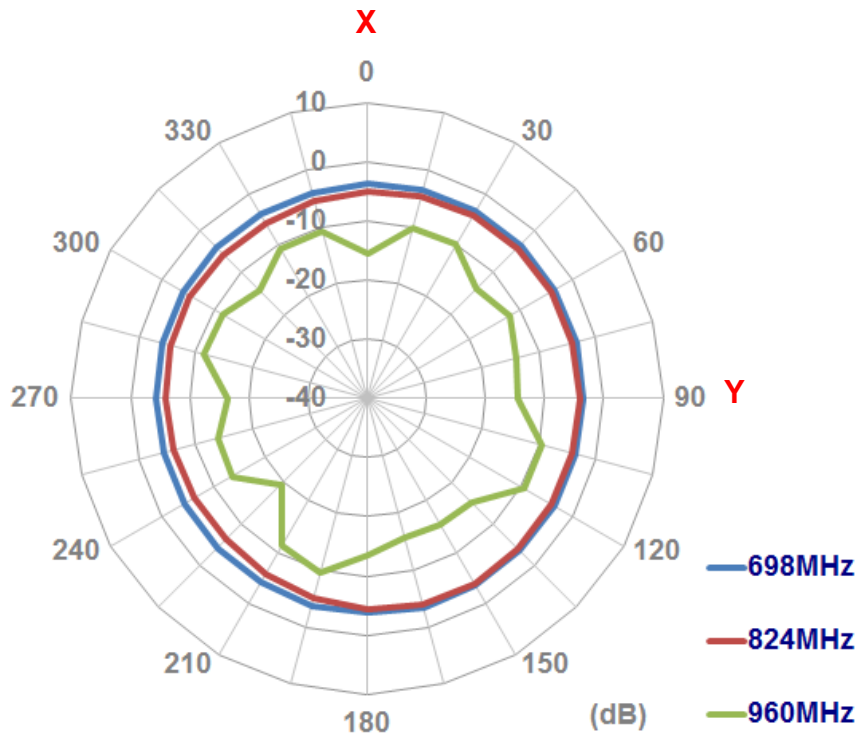

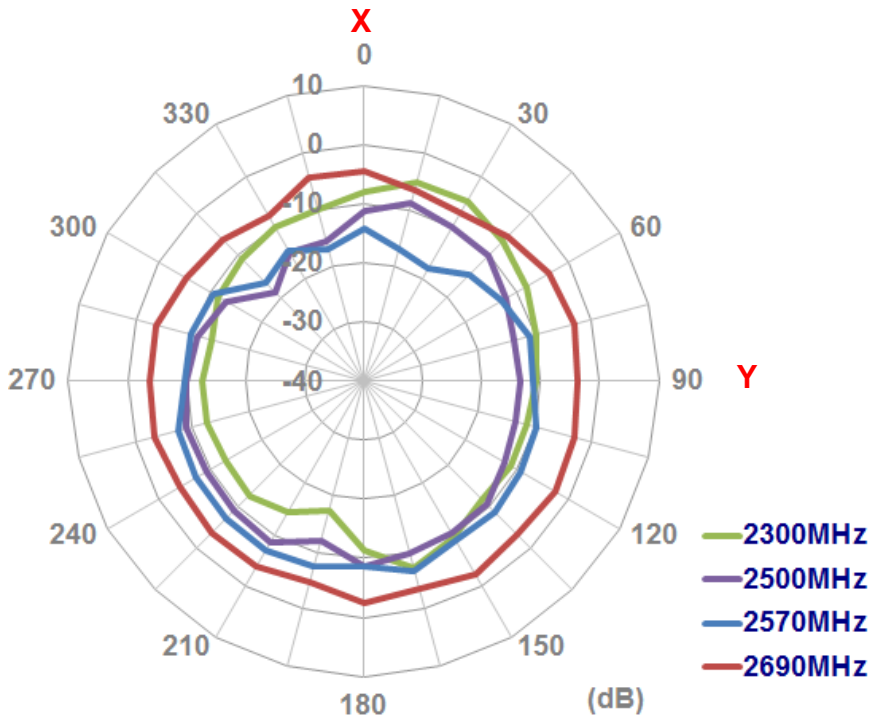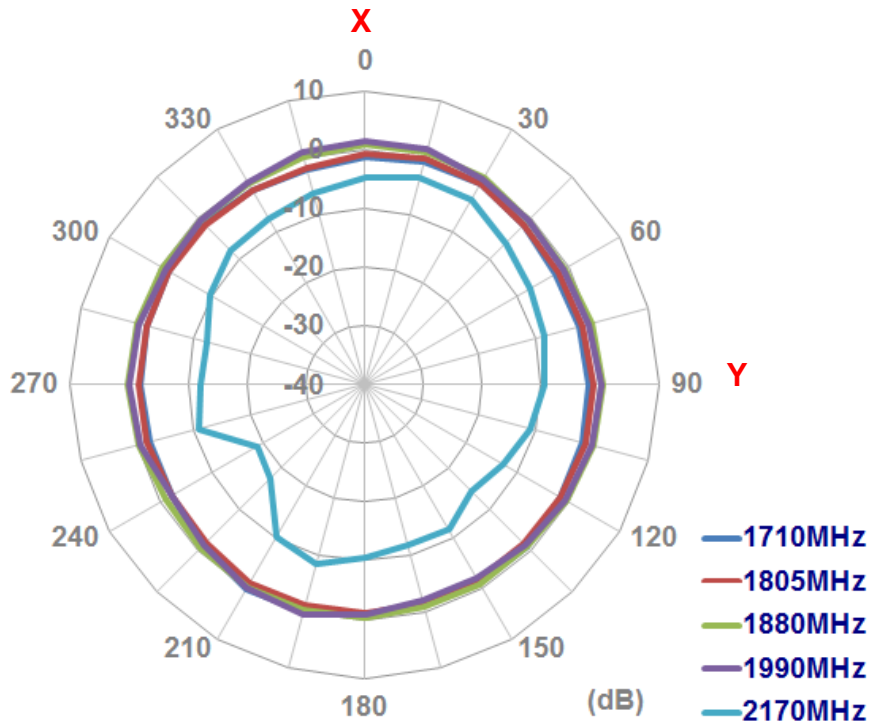


### XZ-plane

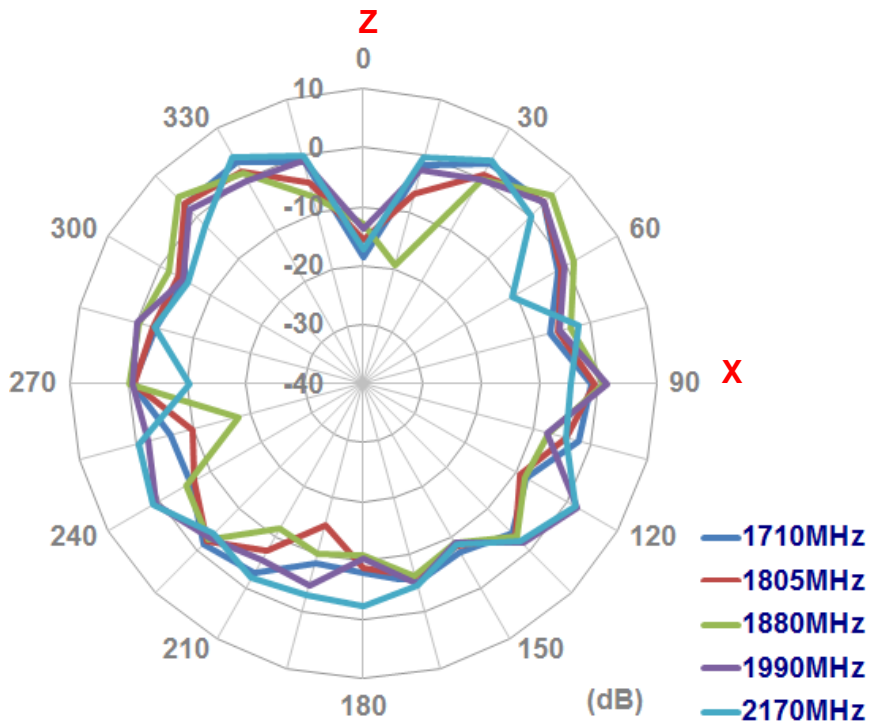
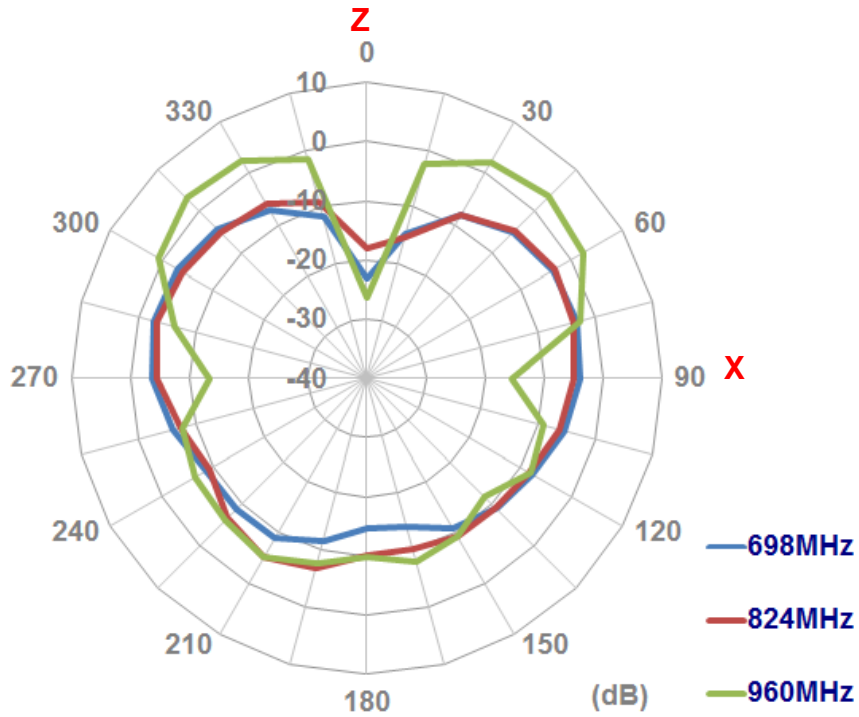


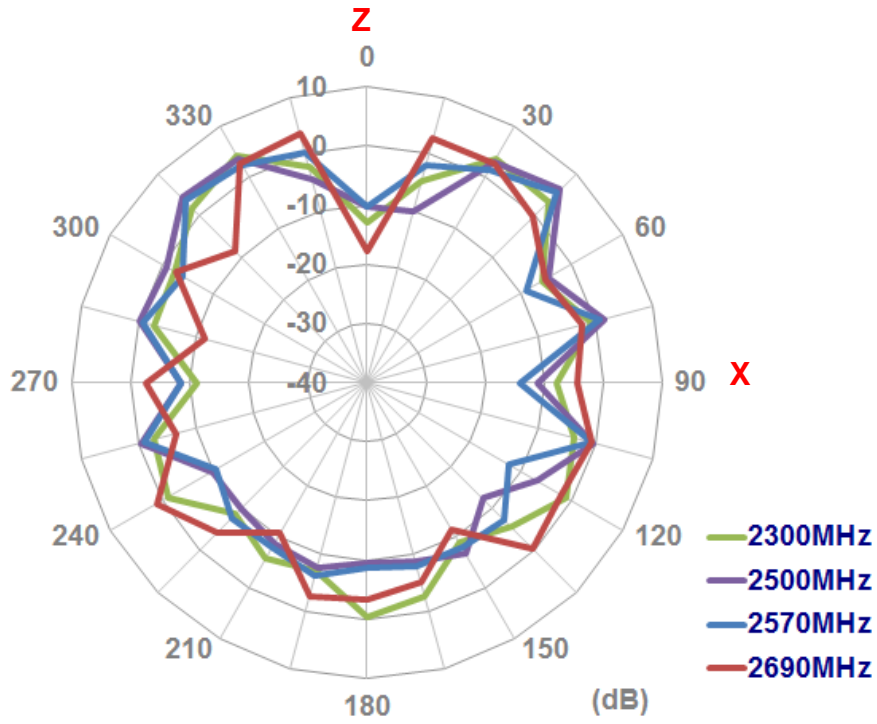


### 4.3. Antenna with L-Bracket

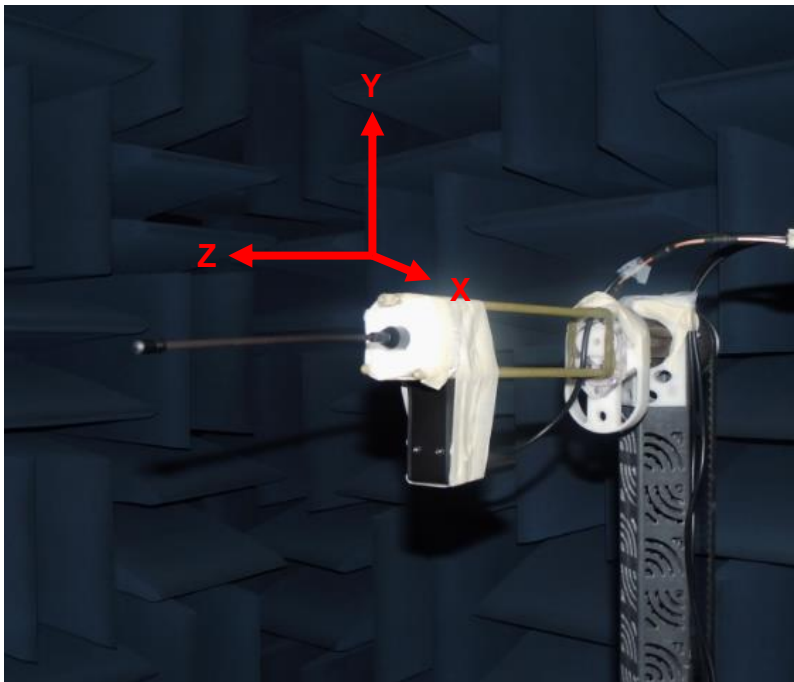




### XY-plane

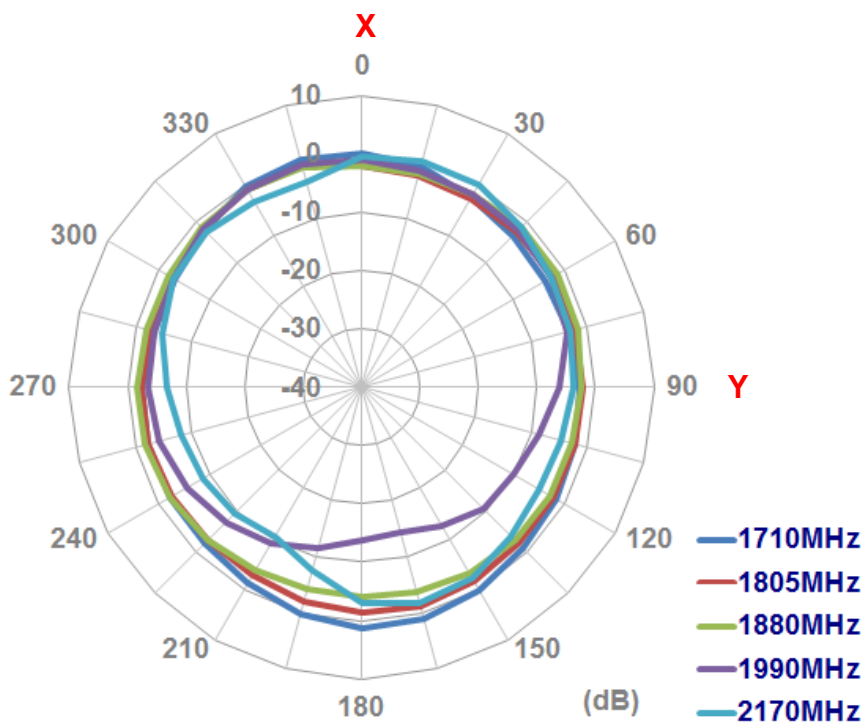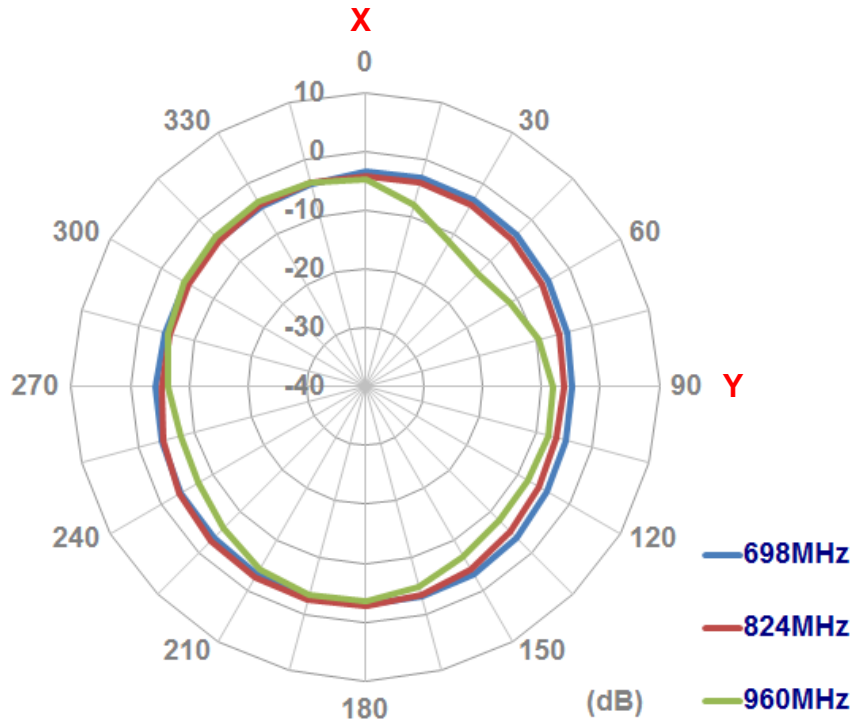

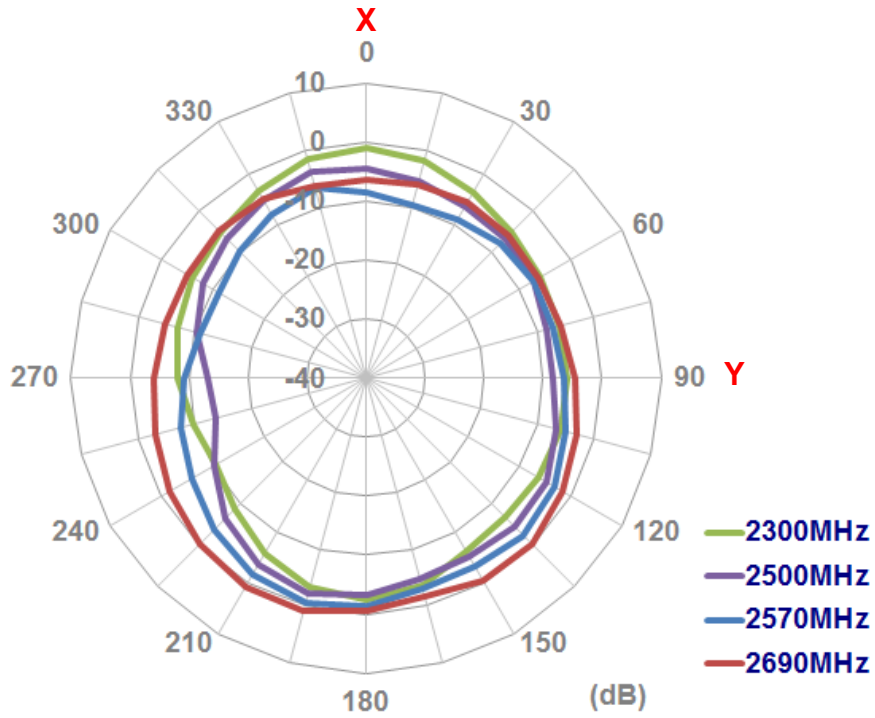


**XZ-plane**

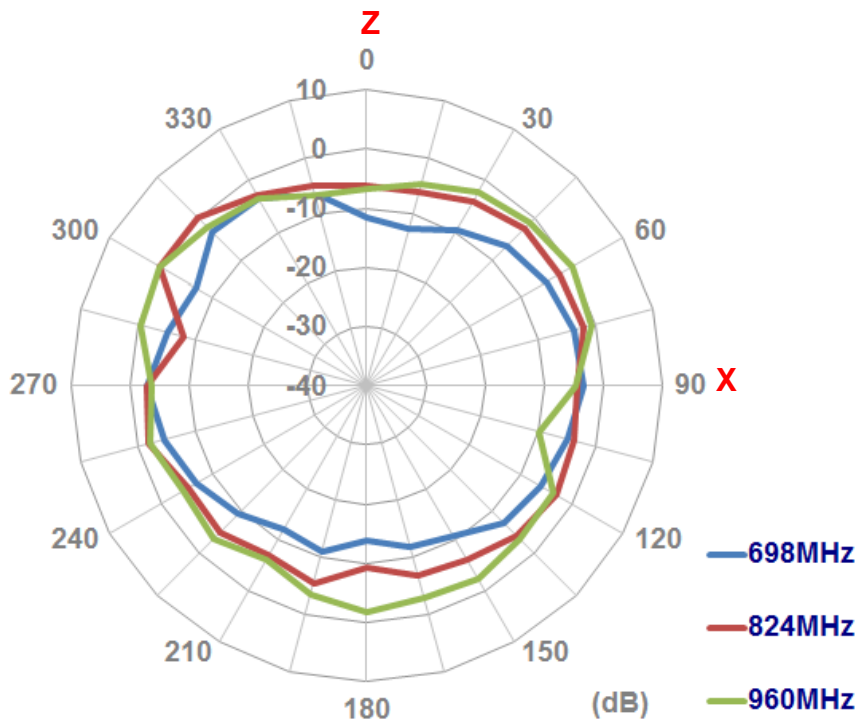

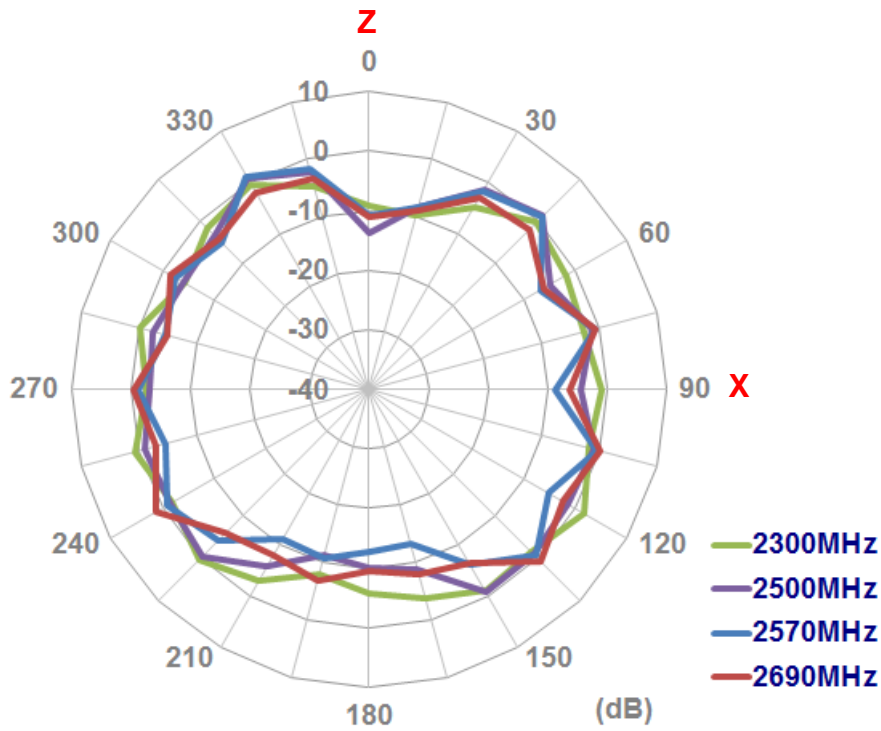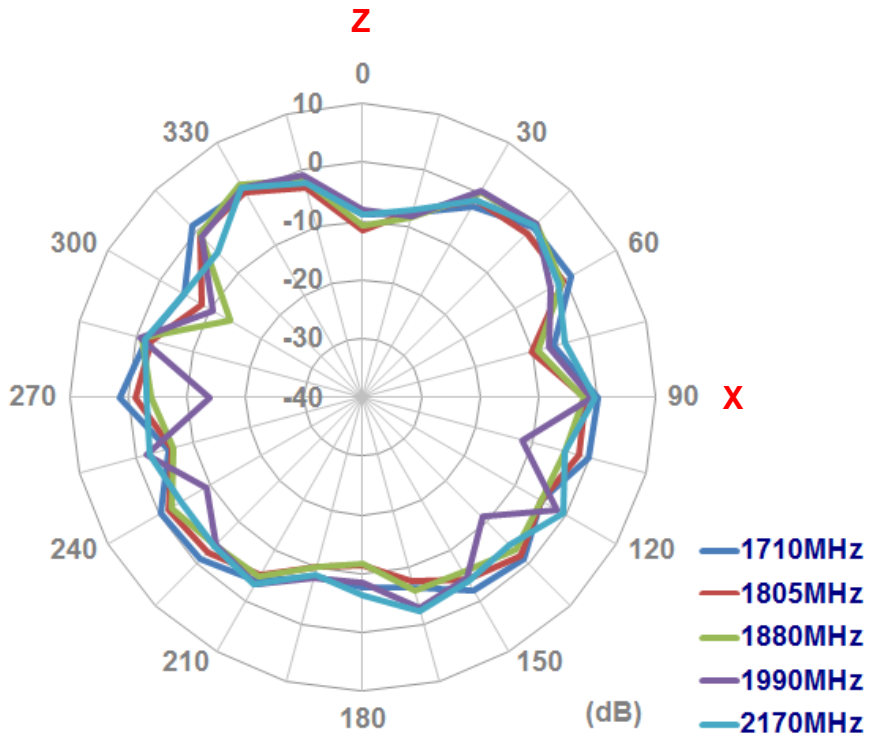



## 5. Antenna Drawing

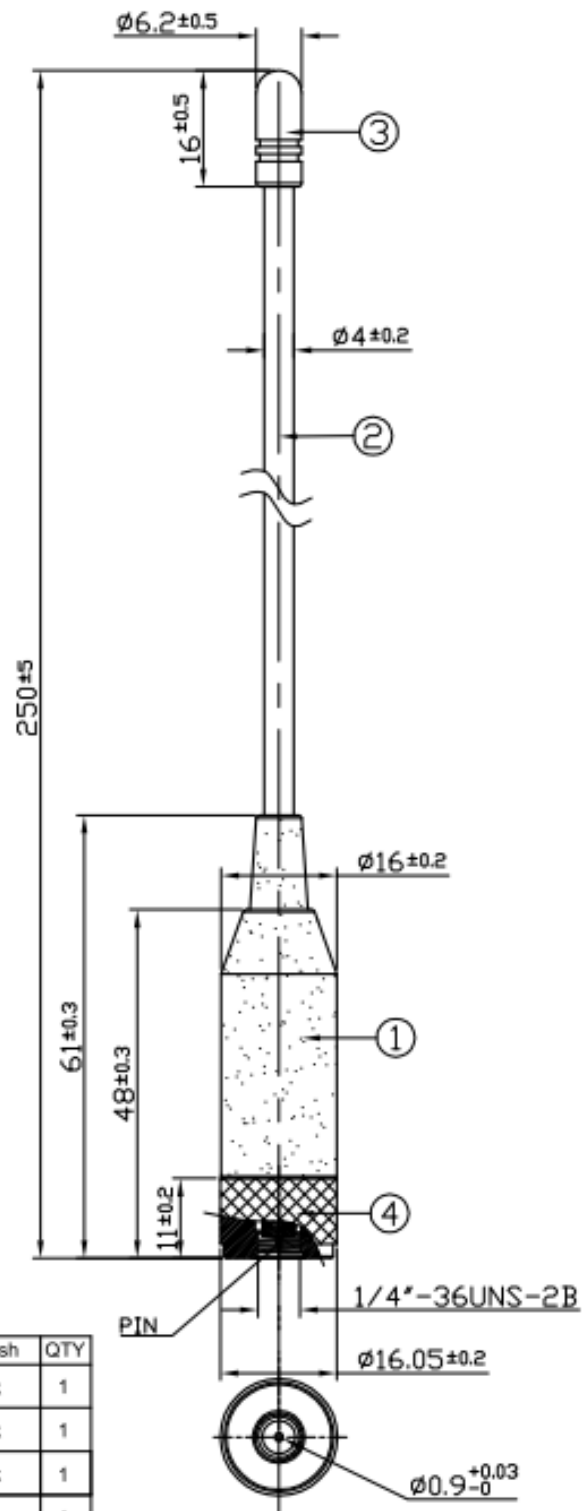

	Name	Material	Finish	QTY
①	Housing	ABS	Black	1
②	Flexible Whip	Steel+PE Jacket	Black	1
③	Cap	ABS	Black	1
④	Outer Body SMA(M)	Brass	Black	1



## 6. Packaging

