





1. Mechanical Dimensions:

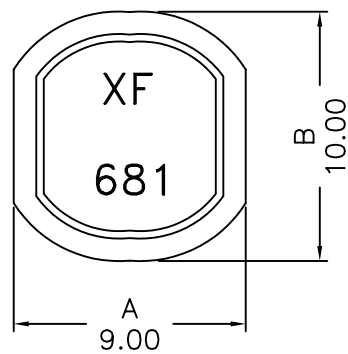

2. Schematic:



3. Electrical Specifications:

OCL: 680uH±20% @1.0KHz 1V

DCR: 1.65 Ohms Max

IDC: 0.30A_{dc} Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -40°C to +85°C

DOC REV: A/1

XFMRs Inc		Title: XFSDR105SH SERIES INDUCTORS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XFSDR105SH-681		REV. A
	DWN.	李小锋	May-22-03
	CHK.	廖玉坤	May-22-03
SHT 1 OF 1	APP.	Isaiah M	May-22-03