


1U DUAL-SOCKET POWER-EFFICIENT SERVER PLATFORM



GT24-B8226

B8226G24W4H (BTO)
B8226G24V4H



■ Front View




■ Back View



Best 1U dual-socket SMP server implementation with high power-efficiency and overall performance


- Dual C32 sockets support up to (2) AMD Opteron™ 4100/4200 series processors (Lisbon/Valencia)
- Support (2) HyperTransport™ 3.0 link, max. bandwidth up to 25.6 GB/s @ 6.4GT/s per link
- AMD SR5690 + SP5100
- (12) 240-pin DDR3 DIMM slots support up to 96GB R-DDR3 1333/1066/800MHz w/ ECC memory
- (1) FH/HL PCI-E (Gen.2) x16 slot
- (1) FH/HL PCI-E (Gen.2) x16 slot
- (3) GbE LAN
- (4) Hot-swap 3.5" SAS 6G HDDs w/ RAID 0, 1, 1E, 10 support (B8226G24W4H)
- (4) Hot-swap 3.5" SATA-II HDDs w/ RAID 0, 1, 10, 5 support (B8226G24V4H)
- Onboard BMC w/ IPMI and iKVM support
- (1) EPS1U high-efficiency (80-PLUS Gold) 500W PSU w/ PFC



GT24-B8226

B8226G24W4H (BTO) / B8226G24V4H

TYAN
Specifications

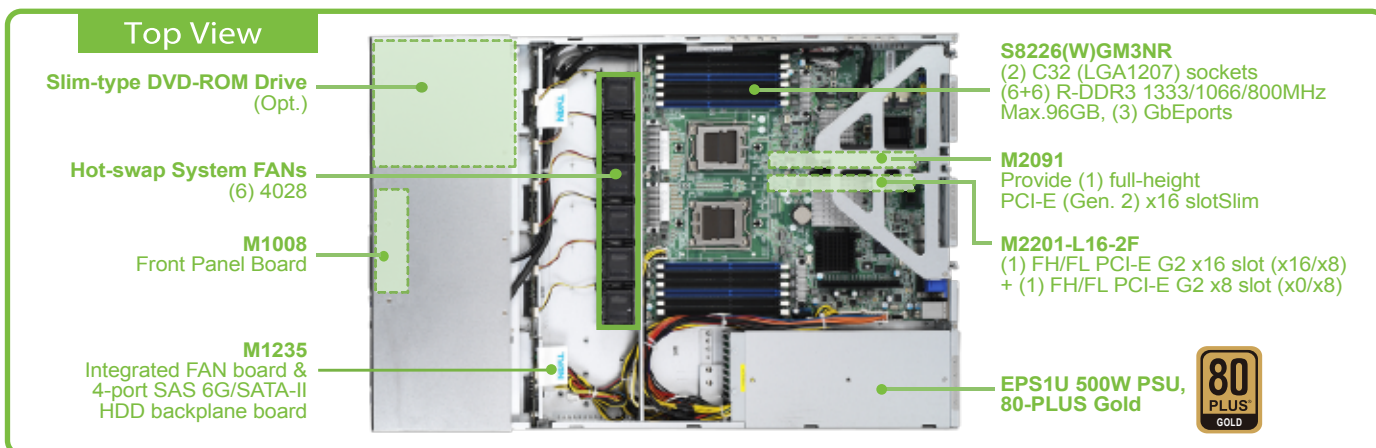

System	Form Factor	1U Rackmount
	Chassis Name	GT24
	Dimension (H x W x D)	1.72" x 17.2" x 25.4" (43.6 x 436 x 645mm)
	Motherboard	S8226GM3NR (B8226G24V4H) S8226WGM3NR (B8226G24W4H)
Front Panel	Gross Weight	16 kg
	Buttons	(1) PWR (w/ LED) / (1) RST / (1) NMI / (1) ID
	LEDs	(1) ID / (1) Warning / (1) Reserved (3) LAN
External Drive Bay	I/O Ports	(2) USB ports
	Type / Q'ty	3.5" Hot-Swap / (4)
System Cooling Configuration	Supported HDD Interface	SATA-II 3.0Gb/s (B8226G24V4H) SAS 6.0Gb/s (B8226G24W4H)
	FAN	(5) 4cm fans
Power Supply	Type	EPS1U
	Input Range	Full-range AC(100-240V)
	Frequency	47 - 63 Hertz
	Output Watts	500 Watts
Processor	Efficiency	PFC / 80-PLUS Gold
	Supported CPU Series	AMD Opteron™ 4100/4200 series processors
	Socket Type / Q'ty	C32 / (2)
	Average CPU Power (ACP) wattage	Up to 75W
Chipset	System Bus	Support (2) HyperTransport™ 3.0 link, max. bandwidth up to 25.6GB/s @ 6.4GT/s per link
	Chipset	AMD SR5690 + SP5100
Memory	Super I/O	Winbond W83627DHG-P
	Supported DIMM Qty	(6+6) DIMM slots
	DIMM Type / Speed	DDR3 1333/1066/800 RDIMM
	Capacity	Up to 96GB RDIMM
	Memory channel	4 Channels (2 Channels per CPU)
Expansion Slots	Memory voltage	1.5V/ 1.35V
	PCI-E	(1) FH/HL PCI-E Gen.2 x16 slot (1) FH/HL PCI-E Gen.2 x16 slot
	Pre-installed TYAN Riser Card	M2091, PCI-E x16 1U riser card (left) M2091-R, PCI-E x16 1U riser card (right)
LAN	Port Q'ty	(3)
	Controller	Intel 82576EB Intel 82574L

Storage	SAS (opt.)	Controller	LSI SAS2008 (B8226G24W4H only)
		Speed	6.0 Gb/s
		RAID	RAID 0/1/1E/10 (LSI Integrated RAID)
Graphic	SATA	Controller	AMD SP5100
		Speed	3.0 Gb/s
		RAID	RAID 0/1/10/5 (Promise RAID stack)
Input / Output	Connector type	D-Sub 15-pin	
	Resolution	1600x1200@60Hz	
	Chipset	Aspeed AST2050	
	USB	(5) USB2.0 ports (2 at rear, 2 at front, 1 type A onboard)	
	COM	(1) DB-9 port	
System Monitoring	VGA	(1) D-Sub 15-pin VGA port	
	RJ-45	(3) GbE ports	
	Chipset	Winbond W83795G	
	Voltage	Monitors voltage for CPU, memory, chipset & power supply	
	Temperature	Monitors temperature for CPU & system environment	
Server Management	LED (On system front panel)	Fan fail LED indicator Over temperature warning indicator	
	Others	Watchdog timer support	
	Onboard Chipset	Onboard Aspeed AST2050	
	AST2050 IPMI Feature	IPMI 2.0 compliant baseboard management controller (BMC) BIOS update USB 2.0 virtual hub	
	AST2050 iKVM Feature	24-bit high quality video compression Dual 10/100 Mb/s MAC interfaces	
BIOS	Brand / ROM size	AMI / 4MB	
	Feature	Plug and Play (PhP) PCI2.3 /WfM2.0 /SMBIOS2.3 /PXE boot ACPI 2.0 power management Power on mode after power recovery User-configurable H/W monitoring Auto-configurable of hard disk types Multiple boot options	
Operating System	OS supported list	Please refer to our OS supported list.	
Regulation	FCC (DoC)	Class A	
	CE (DoC)	Yes	
Operating Environment	Operating Temp.	10° C ~ 35° C (50° F~ 95° F)	
	Non-operating Temp.	- 40° C ~ 70° C (-40° F ~ 158° F)	
	In/Non-operating Humidity	90%, non-condensing at 35° C	
RoHS	RoHS 6/6 Compliant	Yes	

MITAC INTERNATIONAL CORP.
TYAN Business Unit

USA
Tel: +1-510-651-8868
Fax: +1-510-651-7688

Taiwan
Tel: +886-2-2652-5888
Fax: +886-2-2652-5805

Japan
Tel: +81-3-3769-8311
Fax: +81-3-3769-8328

Europe
Sales: +32 2456 1721
Technical Support: +32 2456 1722

China
Shanghai Tel: +86-21-61431188 Ext 1366
China Tel: +86-010-62555015 Ext 8302