



## 1. Mechanical Dimensions:

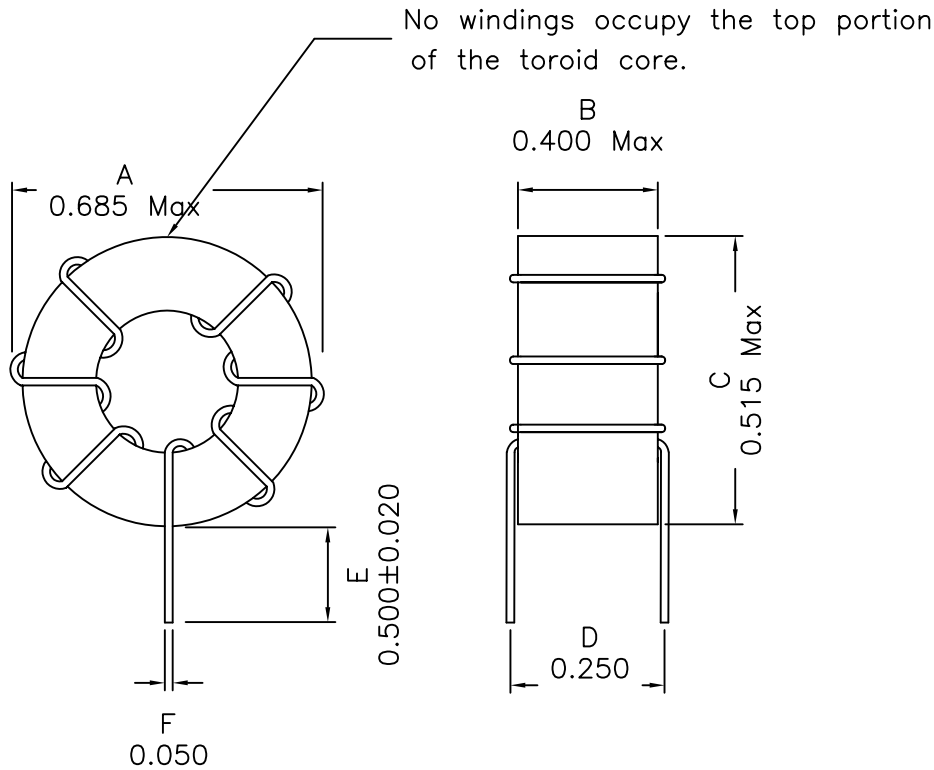

NOTE:

STRIP AND TIN TO MOUNTING PLAIN  
VARNISH REQUIRED  
NO MARKINGS REQUIRED

## 2. Schematic:



## 3. Electrical Specifications: @25°C

OCL:  $0.64\mu\text{H} \pm 12\%$  @10KHz 0.1V, 0Adc  
Rated I: 16Adc (OCL drop by 10% Typ)  
DC Resistance: 0.008 Ohms Maximum

Notes:

- Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible

DOC REV: A/2

<b>XFMRs Inc</b>	Title: TOROIDAL INDUCTOR			
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF6409-V04	REV. A	
	DWN.	廖玉坤	Sep-24-03	
	CHK.	李清儿	Sep-24-03	
SHEET 1 OF 1	APP.	Isaiah M	Sep-24-03	