



# SD3000C..K SERIES

## STANDARD RECOVERY DIODES

## Hockey Puk Version


### Features

- Wide current range
- High voltage ratings up to 1000V
- High surge current capabilities
- Diffused junction
- Hockey Puk version
- Case style DO-200AC (K-PUK)

3800A

### Typical Applications

- Converters
- Power supplies
- High power drives
- Auxiliary system supplies for traction applications

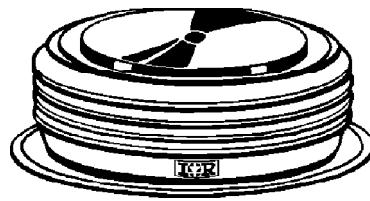

case style DO-200AC (K-PUK)

### Major Ratings and Characteristics

Parameters	SD3000C..K	Units
$I_{F(AV)}$	3800	A
	@ $T_{hs}$	°C
$I_{F(RMS)}$	6230	A
	@ $T_{hs}$	°C
$I_{FSM}$	@ 50Hz	A
	@ 60Hz	A
$I^2t$	@ 50Hz	KA <sup>2</sup> s
	@ 60Hz	KA <sup>2</sup> s
$V_{RRM}$ range	400 to 1000	V
$T_J$	- 40 to 180	°C

**ELECTRICAL SPECIFICATIONS**

## Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage V	$V_{RSM}$ , maximum non-repetitive peak rev. voltage V	$I_{RRM}$ max. @ $T_J = 180^\circ\text{C}$ mA
SD3000C..K	04	400	500	75
	08	800	900	
	10	1000	1100	

## Forward Conduction

Parameter	SD3000C..K	Units	Conditions			
$I_{F(AV)}$ @ Heatsink temperature	3800 (1925)	A	180° conduction, half sine wave Double side (single side) cooled			
	55 (85)	°C				
$I_{F(RMS)}$	6230	A	@ 25°C heatsink temperature double side cooled			
$I_{FSM}$ Max. peak, one-cycle forward, non-repetitive surge current	35800	A	$t = 10\text{ms}$	No voltage reapplied	Sinusoidal halfwave, Initial $T_J = T_J$ max.	
	37500		$t = 8.3\text{ms}$			
	30100		$t = 10\text{ms}$	100% $V_{RRM}$ reapplied		
	31500		$t = 8.3\text{ms}$	reapplied		
$I^2t$ Maximum $I^2t$ for fusing	6410	KA <sup>2</sup> s	$t = 10\text{ms}$	No voltage reapplied	Initial $T_J = T_J$ max.	
	5850		$t = 8.3\text{ms}$			
	4530		$t = 10\text{ms}$	100% $V_{RRM}$ reapplied		
	4135		$t = 8.3\text{ms}$	reapplied		
$I^2\sqrt{t}$	64100	KA <sup>2</sup> /s	$t = 0.1$ to 10ms, no voltage reapplied			
$V_{F(TO)1}$ Low level value of threshold voltage	0.74	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$ , $T_J = T_J$ max.			
$V_{F(TO)2}$ High level value of threshold voltage	0.86		$(I > \pi \times I_{F(AV)})$ , $T_J = T_J$ max.			
$r_{f1}$ Low level value of forward slope resistance	0.08	mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$ , $T_J = T_J$ max.			
$r_{f2}$ High level value of forward slope resistance	0.07		$(I > \pi \times I_{F(AV)})$ , $T_J = T_J$ max.			
$V_{FM}$	1.22	V	$I_{pk} = 6000\text{A}$ , $T_J = T_J$ max, $t_p = 10\text{ms}$ sinusoidal wave			

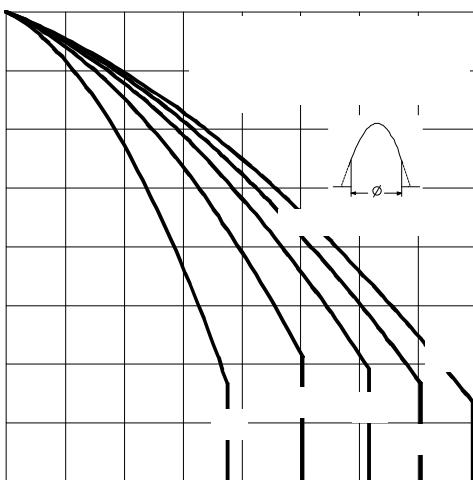


Fig. 3 - Current Ratings Characteristics

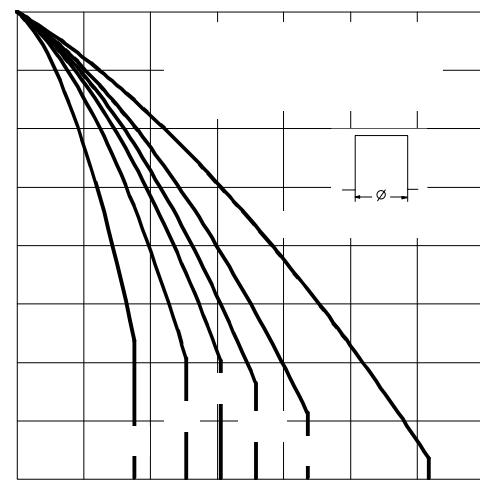


Fig. 4 - Current Ratings Characteristics

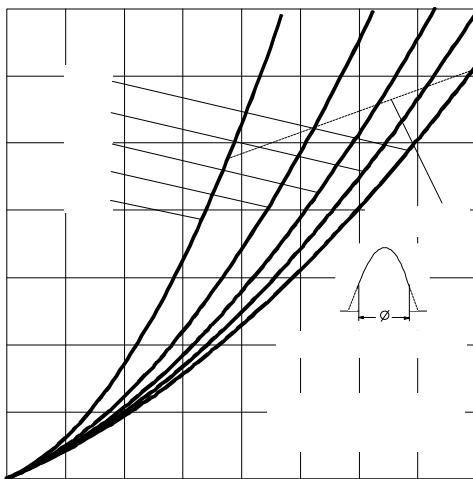


Fig. 5 - Forward Power Loss Characteristics

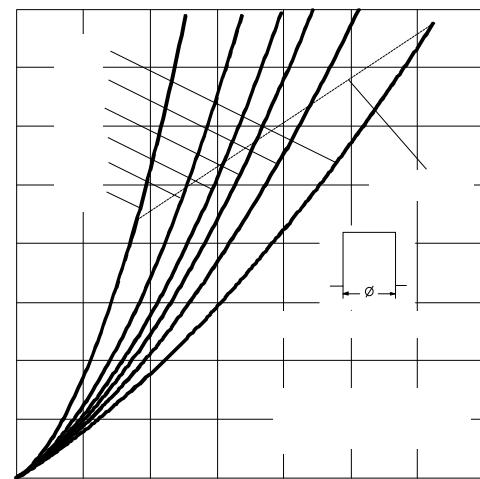


Fig. 6 - Forward Power Loss Characteristics

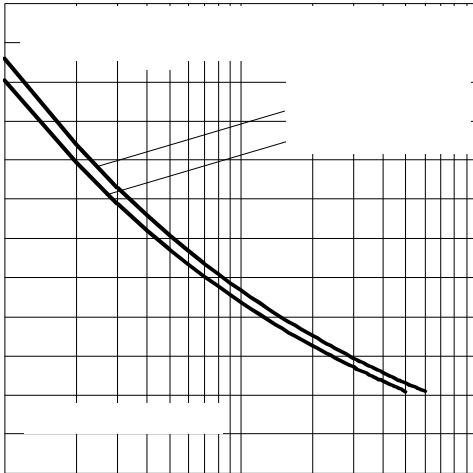


Fig. 7 - Maximum Non-Repetitive Surge Current

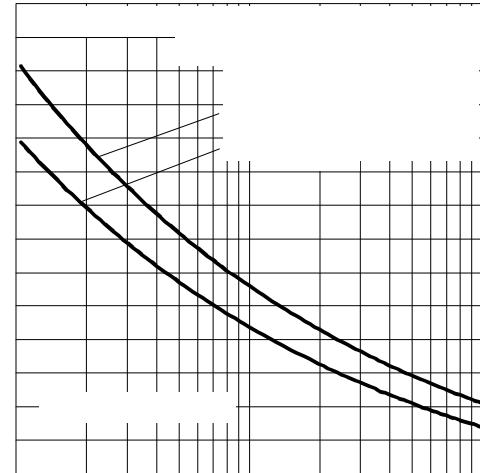


Fig. 8 - Maximum Non-Repetitive Surge Current

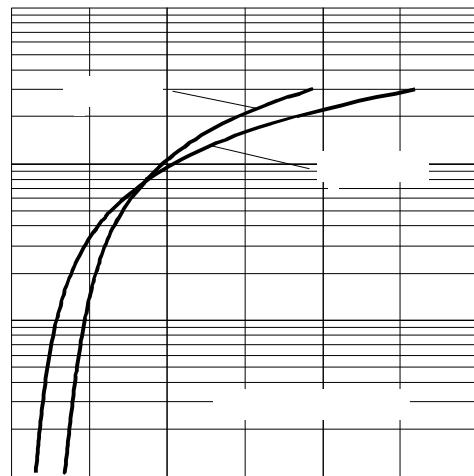


Fig. 9 - Forward Voltage Drop Characteristics

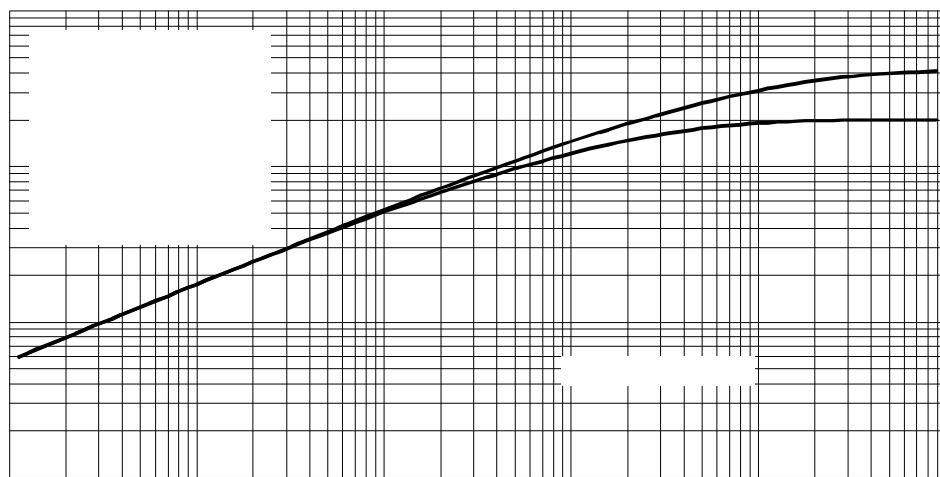


Fig. 10 - Thermal Impedance  $Z_{thJ-hs}$  Characteristics

## Thermal and Mechanical Specifications

Parameter	SD3000C..K	Units	Conditions
$T_J$	Max. junction operating temperature range	-40 to 180 -55 to 200	$^{\circ}\text{C}$
$T_{\text{stg}}$	Max. storage temperature range		
$R_{\text{thJ-hs}}$	Max. thermal resistance, junction to heatsink	0.042	DC operation single side cooled DC operation double side cooled
		0.020	
F	Mounting force, $\pm 10\%$	22250 (2250)	N (Kg)
wt	Approximate weight	425	g
Case style	DO-200AC(K-PUK)	See Outline Table	

 $\Delta R_{\text{thJ-hs}}$  Conduction(The following table shows the increment of thermal resistance  $R_{\text{thJ-hs}}$  when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.002	0.002	0.001	0.001	K/W	$T_J = T_{\text{J max.}}$
120°	0.002	0.002	0.002	0.002		
90°	0.003	0.003	0.003	0.003		
60°	0.004	0.004	0.004	0.004		
30°	0.007	0.007	0.007	0.007		

## Ordering Information Table

Device Code	SD	300	0	C	10	K
	1	2	3	4	5	6
1 - Diode						
2 - Essential part number						
3 - 0 = Standard recovery						
4 - C = Ceramic Puk						
5 - Voltage code: code x 100 = $V_{\text{RRM}}$ (see Voltage Ratings Table)						
6 - K = Puk Case DO-200AC (K-PUK)						

## Outline Table

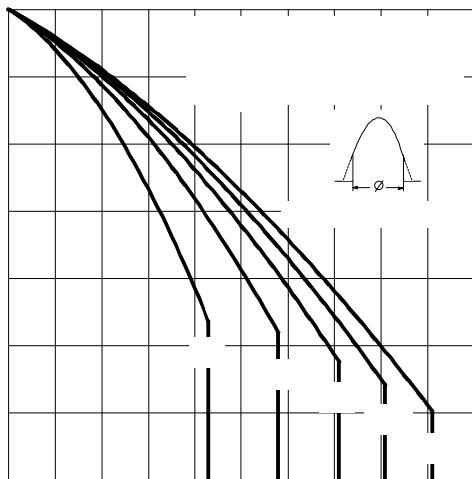
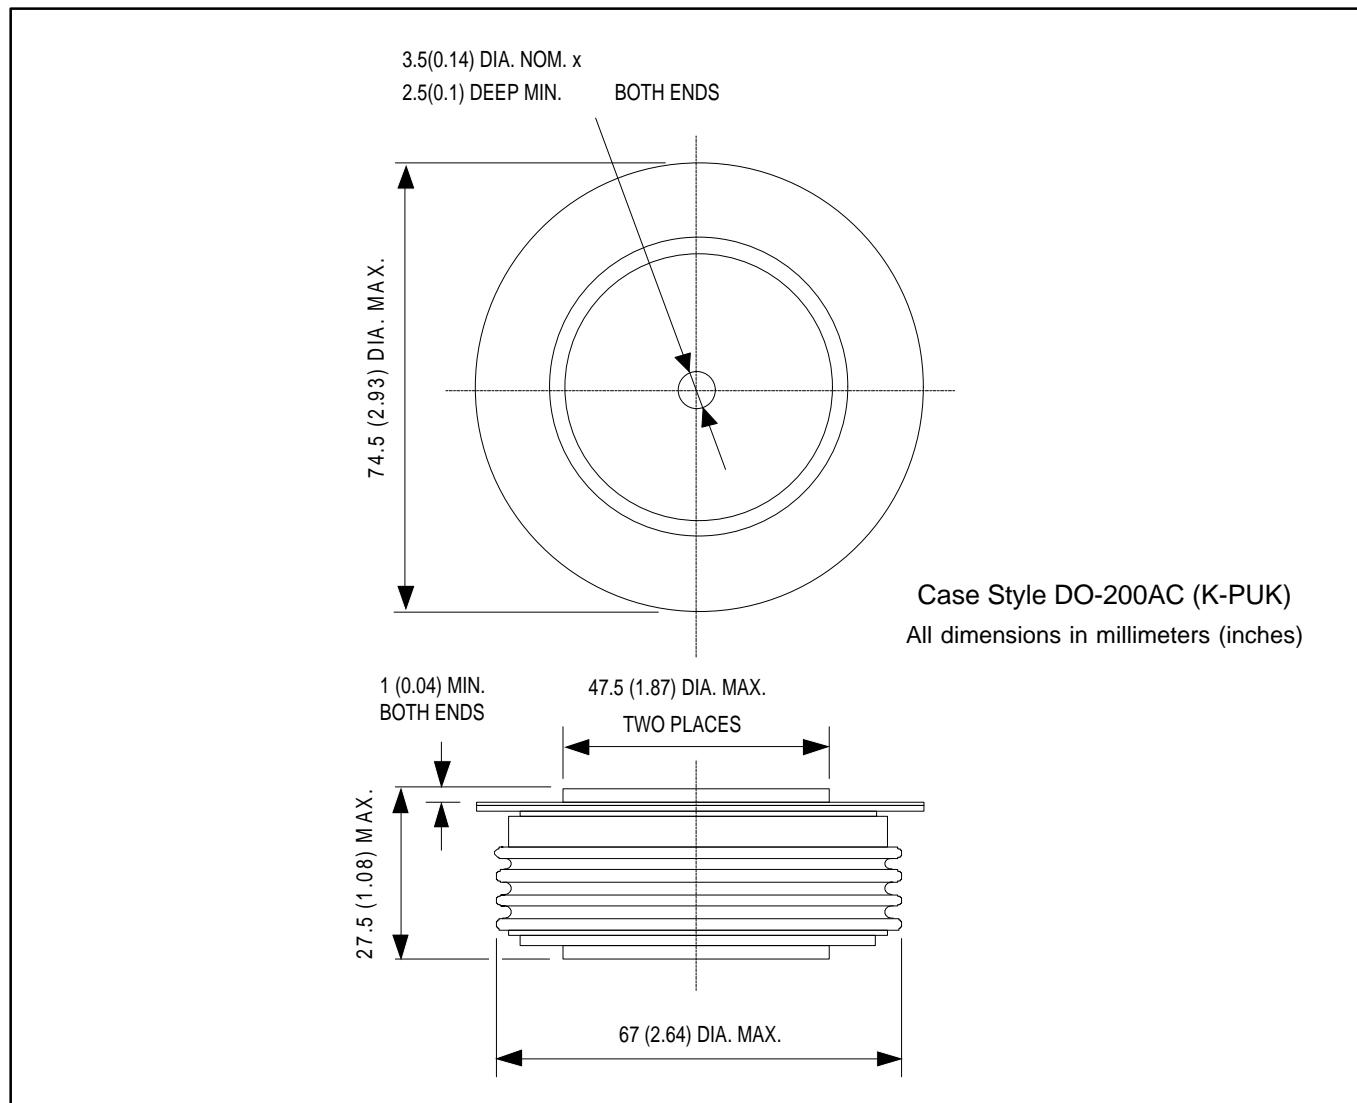


Fig. 1 - Current Ratings Characteristics

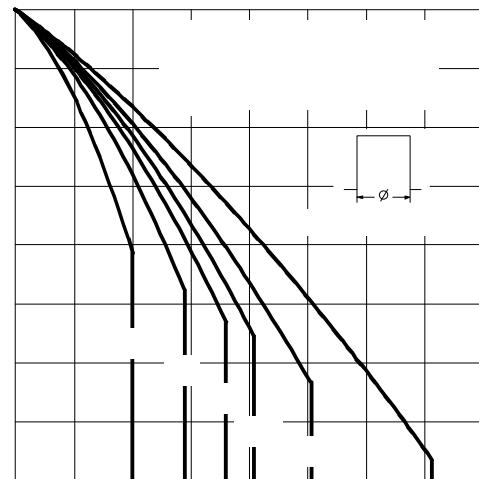


Fig. 2 - Current Ratings Characteristics