
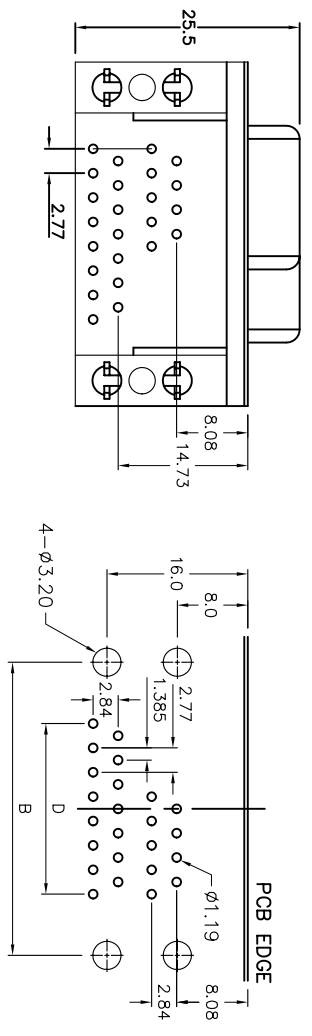


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/29/04	

APPROVED: _____
 DATE: _____ TITLE: _____

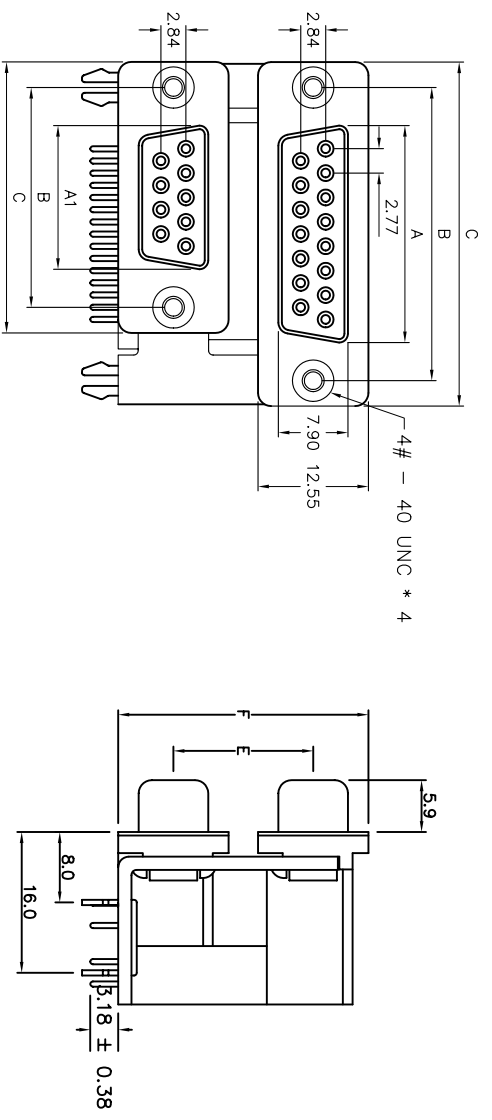

VERTICAL DIMENSION RETIEN CONN		Dim E ±0.15	Dim F ±0.15
A	15.88	28.43	
B	19.05	31.60	
C	22.86	35.41	

SHELL SIZE	Dim A ±0.20	Dim B ±0.25	Dim C ±0.38	Dim D
09 pin	16.33	24.99	30.80	11.08
15 pin	24.66	33.32	39.10	19.39

SPECIFICATIONS:

- Material: PBT, glass reinforced
- Insulator: thermoplastic, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on tails.
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 5 Amps max
 - Insulation resistance: 15 Mohms min @ 500 VDC
 - Dielectric withstanding voltage: 1000 VAC for 1 minute
 - Temperature Rating: Operating temperature: -55°C to +105°C

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL PORT D-SUB, 15P FEMALE OVER
 9P FEMALE, RIGHT ANGLE PCB

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS:		DATE:	
DRAWN	SS	7/29/04	
CHECKED			
APPROVED			
SIZE	PART NO.	SCALE:	REV.
X	DPD-15/09-00-X3	NTS	
REF:			SHEET 1 OF 1