


XF2-5GPOLx - 2.5G BASE-T TRANSFORMER MODULES



- PoE+ Capable
- True Surface Mount Design
- Tape & Reel Packaging Standard, 250 Pcs per 13"Reel
- Flamability Rating: UL94V-0
- Recommended IR Reflow peak temp of 250C Max
- 350uH minimum OCL(Pri) with 8mA bias current
- Sec DCR: 1.40 Ohms Max
- Minimum 1500 Vrms isolation
- Turns Ratio.: Pri/Sec 1CT:1CT+/-3%

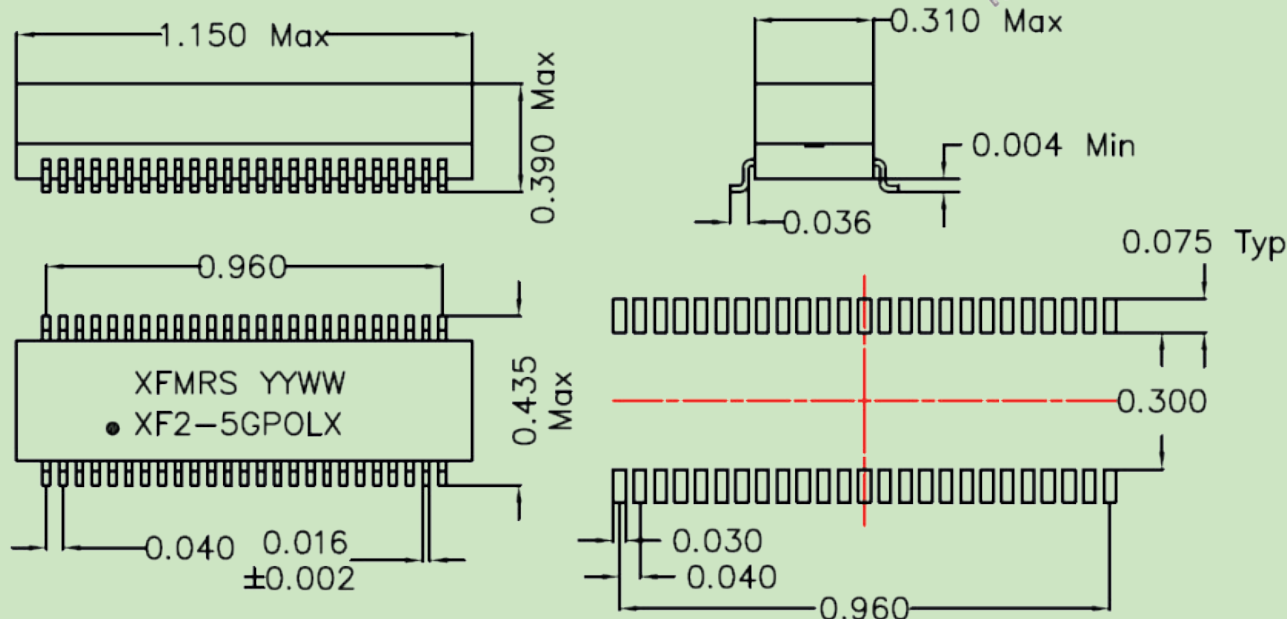


YOUR SUCCESS IS OUR GOAL...

www.XFMRS.com

XFMRS

Schematic:

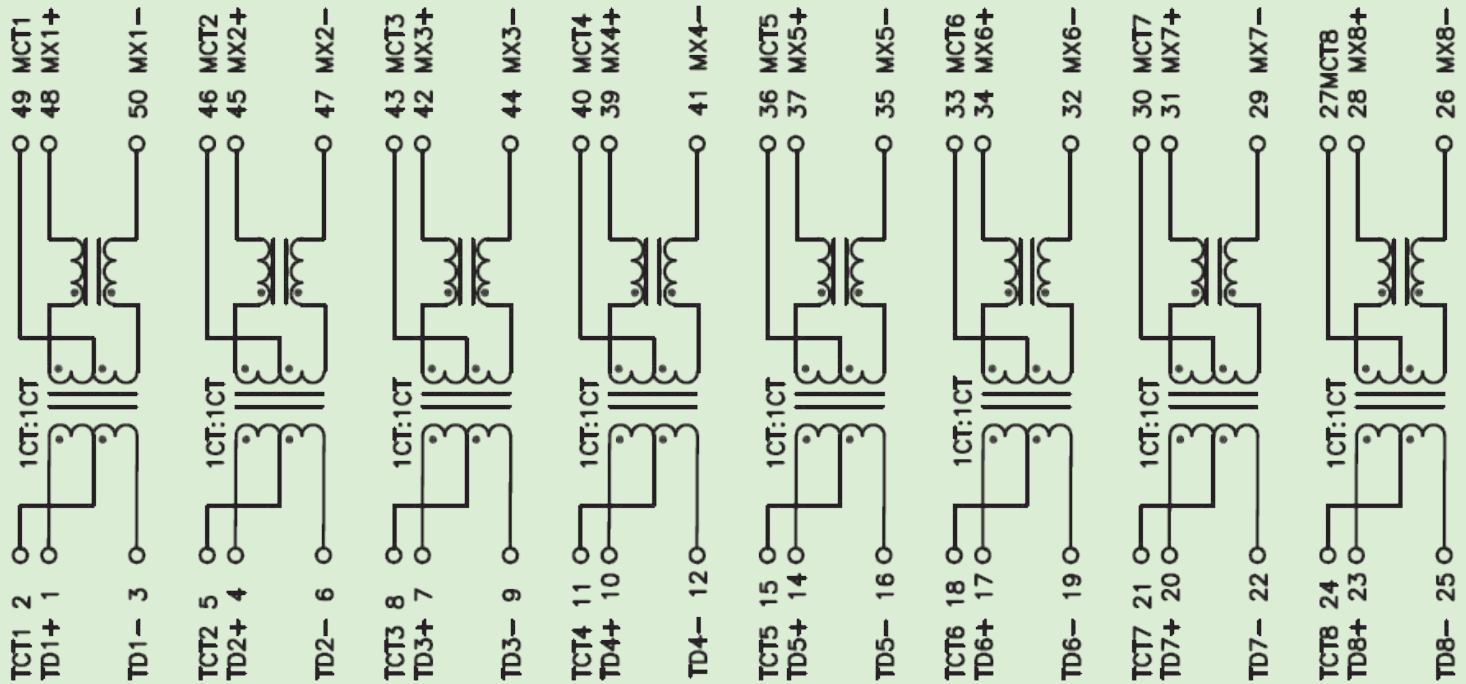

Electrical Specifications: @25°C

Part Number	Insertion Loss			Return Loss			Cross Talk		CCMR		Current Capability	Operating Temperature Range
	1-100MHz	100-125MHz	125-250MHz	1-40MHz	40-100MHz	100-125MHz	1-100MHz	100-125MHz	1-100MHz	100-125MHz		
XF2-5GPOLA	1.0dB Max	1.5dB Max	2.5dB Max	16dB Min	10dB Min	6dB Min	30dB Min	25dB Min	30dB Min	25dB Min	720mA	0°C to +70°C
XF2-5GPOLB	1.0dB Max	1.5dB Max	2.5dB Max	16dB Min	10dB Min	6dB Min	30dB Min	25dB Min	30dB Min	25dB Min	1A	0°C to +70°C
XF2-5GPOLC	1.0dB Max	1.5dB Max	2.5dB Max	16dB Min	10dB Min	6dB Min	30dB Min	25dB Min	30dB Min	25dB Min	1A	-40°C to +85°C

Notes:

OCL: @100KHz 0.1V

YOUR SUCCESS IS OUR GOAL...

CHECK IT OUT!

www.xfmrs.com