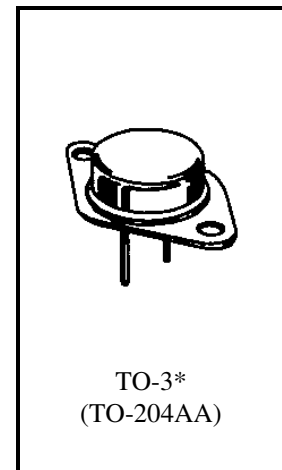


PNP DARLINGTON POWER SILICON TRANSISTOR
Qualified per MIL-PRF-19500/ 505
Devices
2N6286
2N6287
Qualified Level
**JANTX
JANTXV**
MAXIMUM RATINGS

Ratings	Symbol	2N6286	2N6287	Unit
Collector-Emitter Voltage	V_{CEO}	-80	-100	Vdc
Collector-Base Voltage	V_{CBO}	-80	-100	Vdc
Emitter-Base Voltage	V_{EBO}	-7.0		Vdc
Base Current	I_B	-0.5		Adc
Collector Current	I_C	-20		Adc
Total Power Dissipation ⁽¹⁾	P_T	@ $T_C = +25^{\circ}C$	175	W
		@ $T_C = +100^{\circ}C$	87.5	W
Operating & Storage Junction Temperature Range	T_{op}, T_{stg}	-65 to +175		$^{\circ}C$

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.857	$^{\circ}C/W$

 1) Derate linearly @ 1.17 W/ $^{\circ}C$ above $T_C > +25^{\circ}C$


*See appendix A for package outline

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}C$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage $I_C = -100$ mAdc	2N6286 2N6287	$V_{(BR)CEO}$	-80 -100	Vdc
Collector-Emitter Cutoff Current $V_{CE} = -40$ Vdc $V_{CE} = -50$ Vdc	2N6286 2N6287	I_{CEO}	-1.0 -1.0	mAdc
Collector-Emitter Cutoff Current $V_{CE} = -80$ Vdc, $V_{BE} = 1.5$ Vdc $V_{CE} = -100$ Vdc, $V_{BE} = 1.5$ Vdc	2N6286 2N6287	I_{CEX}	-0.5 -0.5	mAdc
Emitter-Base Cutoff Current $V_{EB} = -7.0$ Vdc		I_{EBO}	-2.5	Adc

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
DC CHARACTERISTICS ⁽²⁾				
Forward-Current Transfer Ratio $I_C = -1.0 \text{ Adc}, V_{CE} = -3.0 \text{ Vdc}$ $I_C = -10 \text{ Adc}, V_{CE} = -3.0 \text{ Vdc}$ $I_C = -20 \text{ Adc}, V_{CE} = -3.0 \text{ Vdc}$	h_{FE}	1,500 1,250 300	18,000	
Collector-Emitter Saturation Voltage $I_C = -20 \text{ Adc}, I_B = -200 \text{ mAdc}$ $I_C = -10 \text{ Adc}, I_B = -40 \text{ mAdc}$	$V_{CE(sat)}$		-3.0 -2.0	Vdc
Base-Emitter Saturation Voltage $I_C = -20 \text{ Adc}, I_B = -200 \text{ mAdc}$	$V_{BE(sat)}$		-4.0	Vdc
Base-Emitter Voltage $I_C = -10 \text{ Adc}, V_{CE} = -3.0 \text{ Vdc}$	$V_{BE(on)}$		-2.8	Vdc

DYNAMIC CHARACTERISTICS

Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = -10 \text{ Adc}, V_{CE} = -3.0 \text{ Vdc}, f = 1.0 \text{ MHz}$	$ h_{fe} $	8.0	80	
Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = -10 \text{ Adc}, V_{CE} = -3.0 \text{ Vdc}$	h_{fe}	300		
Output Capacitance $V_{CB} = -10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	C_{obo}		400	pF

SWITCHING CHARACTERISTICS

Turn-On Time $V_{CC} = -30 \text{ Vdc}, I_C = -10 \text{ Adc}, I_B = -40 \text{ mAdc}$	t_{on}		2.0	μs
Turn-Off Time $V_{CC} = -30 \text{ Vdc}, I_C = -10 \text{ Adc}, I_{B1} = I_{B2} = -40 \text{ mAdc}$	t_{off}		10	μs

SAFE OPERATING AREA

DC Tests $T_C = +25^\circ\text{C}, 1 \text{ Cycle}, t = 1.0 \text{ s}$	
Test 1 $V_{CE} = -8.75 \text{ Vdc}, I_C = -20 \text{ Adc}$	All Types
Test 2 $V_{CE} = -30 \text{ Vdc}, I_C = -5.8 \text{ Adc}$	All Types
Test 3 $V_{CE} = -80 \text{ Vdc}, I_C = -100 \text{ mAdc}$	2N6286
$V_{CE} = -100 \text{ Vdc}, I_C = -100 \text{ mAdc}$	2N6287

(2) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.