## Low Power Peak EMI Reducing Solution

#### **Features**

- Generates an EMI optimized clock signal at the output.
- Integrated loop filter components.
- Operates with a 3.3 / 2.5V Supply.
- Operating current less than 5mA.
- Low power CMOS design.
- Input frequency range: 30MHz to 50MHz for 2.5V.
   : 30MHz to 50MHz for 3.3V.
- Generates a 1X low EMI spread spectrum clock of the input frequency.
- Frequency deviation: ±0.75% (Typ) @46MHz Input Frequency.
- Available in 6 pin TSOT-23, 8 pin SOIC and 8 pin TSSOP Packages.

#### **Product Description**

The ASM3P2780A is a versatile spread spectrum frequency modulator designed specifically for a wide range of clock frequencies. The ASM3P2780A reduces electromagnetic interference (EMI) at the clock source, allowing system wide reduction of EMI of all clock dependent signals. The ASM3P2780A allows significant system cost savings by reducing the number of circuit board layers ferrite beads, shielding that are traditionally required to pass EMI regulations.

The ASM3P2780A uses the most efficient and optimized modulation profile approved by the FCC and is implemented by using a proprietary all digital method.

The ASM3P2780A modulates the output of a single PLL in order to "spread" the bandwidth of a synthesized clock, and more importantly, decreases the peak amplitudes of its harmonics. This results in significantly lower system EMI compared to the typical narrow band signal produced by oscillators and most frequency generators. Lowering EMI by increasing a signal's bandwidth is called 'spread spectrum clock generation'.


#### **Applications**

The ASM3P2780A is targeted towards all portable devices with very low power requirements like MP3 players and digital still cameras.


**Key Specifications** 

Description	Specification
Supply voltages	V <sub>DD</sub> = 3.3V / 2.5V
Cycle-to-Cycle Jitter	200pS (Max)
Output Duty Cycle	45/55%
Modulation Rate Equation	F <sub>IN</sub> /1280
Frequency Deviation	±0.75 (Typ) @ 46MHz

#### **Block Diagram**

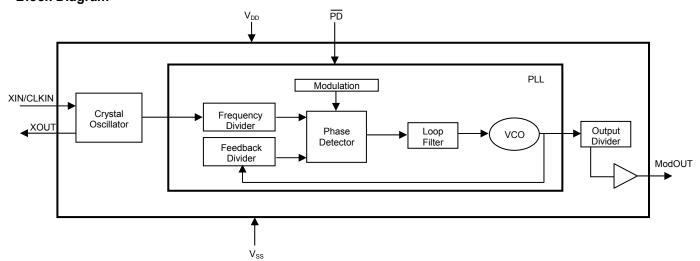

## Pin Configuration (6-pin TSOT- 23 Package)

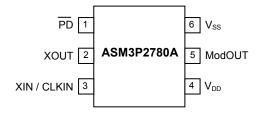


## **Pin Description**

Pin#	Pin Name	Туре	Description
1	— PD	I	Power-down control pin. Pull low to enable power-down mode. Connect to $V_{\text{DD}}$ if not used.
2	XOUT	0	Crystal connection. If using an external reference, this pin must be left unconnected.
3	XIN / CLKIN	ı	Crystal connection or external reference frequency input. This pin has dual functions. It can be connected either to an external crystal or an external reference clock.
4	$V_{DD}$	Р	Power supply for the entire chip.
5	ModOUT	0	Spread spectrum clock output.
6	V <sub>SS</sub>	Р	Ground connection.




## Pin Configuration (8-pin SOIC and TSSOP Packages)

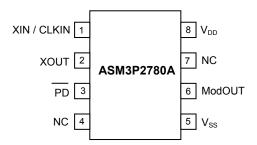

## **Pin Description**

Pin#	Pin Name	Type	Description
1	XIN/CLKIN	I	Crystal connection or external reference frequency input. This pin has dual functions. It can be connected either to an external crystal or an external reference clock.
2	XOUT	0	Crystal connection. If using an external reference, this pin must be left unconnected.
3	— PD	I	Power-down control pin. Pull low to enable power-down mode. Connect to VDD if not used.
4	NC	-	No connect.
5	V <sub>SS</sub>	Р	Ground connection.
6	ModOUT	0	Spread spectrum clock output.
7	NC	-	No connect.
8	$V_{DD}$	Р	Power supply for the entire chip.

#### **Modulation Profile**

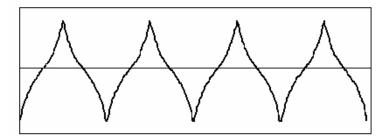

## **Specifications**

Description		Specification
	For 2.5V Supply	
Frequency Range	For 3.3V Supply	30MHz < CLKIN < 50MHz
Modulation Equation		F <sub>IN</sub> /1280
Frequency Deviation		±0.75% (Typ) @ 46MHz



rev 1.5 **Absolute Maximum Ratings** 

Symbol	Parameter	Rating	Unit
$V_{DD},V_{IN}$	Voltage on any pin with respect to Ground	-0.5 to +7.0	V
T <sub>STG</sub>	Storage temperature	-65 to +125	°C
T <sub>A</sub>	Operating temperature	0 to 70	°C
Ts	Max. Soldering Temperature (10 sec)	260	°C
TJ	Junction Temperature	150	°C
$T_DV$	Static Discharge Voltage (As per JEDEC STD22- A114-B)	2	KV

Note: These are stress ratings only and are not implied for functional use. Exposure to absolute maximum ratings for prolonged periods of time may affect device reliability

## DC Electrical Characteristics for 2.5V Supply

(Test condition: All parameters are measured at room temperature (+25°C) unless otherwise stated)

Parameter	Min	Тур	Max	Unit
Input low voltage	V <sub>SS</sub> - 0.3	-	0.8	V
Input high voltage	2.0	-	V <sub>DD</sub> + 0.3	V
Input low current	-	-	-35	μA
Input high current	-	-	35	μA
XOUT output low current (@0.6V, V <sub>DD</sub> =2.5V)	-	3	-	mA
XOUT output high current (@1.8V, V <sub>DD</sub> =2.5V)	-	3	-	mA
Output low voltage ( $V_{DD}$ = 2.5 V, $I_{OL}$ = 8mA)	-	-	0.6	V
Output high voltage (V <sub>DD</sub> = 2.5 V, I <sub>OH</sub> = 8mA)	1.8	-	-	V
Static supply current*	-	-	10	uA
Dynamic supply current (2.5V, 46MHz and no load)	-	4.0	-	mA
Operating Voltage	2.375	2.5	2.625	V
t <sub>ON</sub> Power-up time (first locked cycle after power-up)**		-	5	mS
Output impedance	-	50	-	Ω
	Input low voltage Input high voltage Input low current Input high current  XOUT output low current (@0.6V, V <sub>DD</sub> =2.5V)  XOUT output high current (@1.8V, V <sub>DD</sub> =2.5V)  Output low voltage (V <sub>DD</sub> = 2.5 V, I <sub>OL</sub> = 8mA)  Output high voltage (V <sub>DD</sub> = 2.5 V, I <sub>OH</sub> = 8mA)  Static supply current*  Dynamic supply current (2.5V, 46MHz and no load)  Operating Voltage  Power-up time (first locked cycle after power-up)**	Input low voltage $V_{SS}$ - 0.3Input high voltage2.0Input low current-Input high current-XOUT output low current (@0.6V, $V_{DD}$ =2.5V)-XOUT output high current (@1.8V, $V_{DD}$ =2.5V)-Output low voltage ( $V_{DD}$ = 2.5 V, $I_{OL}$ = 8mA)-Output high voltage ( $V_{DD}$ = 2.5 V, $I_{OH}$ = 8mA)1.8Static supply current*-Dynamic supply current (2.5V, 46MHz and no load)-Operating Voltage2.375Power-up time (first locked cycle after power-up)**-	Input low voltage $V_{SS}$ - 0.3 -  Input high voltage $2.0$ -  Input low current -  Input high current -  XOUT output low current (@0.6V, $V_{DD}$ =2.5V) -  XOUT output high current (@1.8V, $V_{DD}$ =2.5V) -  Output low voltage ( $V_{DD}$ = 2.5 V, $I_{OL}$ = 8mA) -  Output high voltage ( $V_{DD}$ = 2.5 V, $I_{OH}$ = 8mA) 1.8 -  Static supply current* -  Dynamic supply current (2.5V, 46MHz and no load) -  Operating Voltage 2.375 2.5  Power-up time (first locked cycle after power-up)** -	Input low voltage $V_{SS}$ - 0.3       -       0.8         Input high voltage       2.0       - $V_{DD}$ + 0.3         Input low current       -       -       -35         Input high current       -       -       35         XOUT output low current (@0.6V, $V_{DD}$ =2.5V)       -       3       -         XOUT output high current (@1.8V, $V_{DD}$ =2.5V)       -       3       -         Output low voltage ( $V_{DD}$ = 2.5 V, $V_{DD}$ = 8mA)       -       -       0.6         Output high voltage ( $V_{DD}$ = 2.5 V, $V_{DD}$ = 8mA)       1.8       -       -         Static supply current*       -       -       10         Dynamic supply current (2.5V, 46MHz and no load)       -       4.0       -         Operating Voltage       2.375       2.5       2.625         Power-up time (first locked cycle after power-up)**       -       -       5

### **AC Electrical Characteristics for 2.5V Supply**

	arameter	Min	Тур	Max	Unit
Input frequency		30	-	50	MHz
Output frequency		30	-	50	MHz
Fraguency Doviation	Input Frequency = 30MHz	-	± 1.10	-	%
Input Frequency = 50MHz		-	± 0.65	-	70
Output rise time (measured from 0.7V to 1.7V)		0.7	1.3	1.6	nS
Output fall time (measured from 1.7V to 0.7V)		0.4	0.8	1.0	nS
Jitter (cycle to cycle)		-	-	200	pS
Output duty cycle		45	50	55	%
	Output frequency  Frequency Deviation  Output rise time (measure Output fall time (measure Jitter (cycle to cycle)	Output frequency  Frequency Deviation  Input Frequency = 30MHz Input Frequency = 50MHz Output rise time (measured from 0.7V to 1.7V)  Output fall time (measured from 1.7V to 0.7V)  Jitter (cycle to cycle)	Output frequency  Frequency Deviation  Input Frequency = 30MHz Input Frequency = 50MHz Output rise time (measured from 0.7V to 1.7V)  Output fall time (measured from 1.7V to 0.7V)  Jitter (cycle to cycle)  30	Output frequency         30         -           Frequency Deviation         Input Frequency = 30MHz   - ± 1.10           ± 1.10             Input Frequency = 50MHz   - ± 0.65           - ± 0.65             Output rise time (measured from 0.7V to 1.7V)         0.7         1.3           Output fall time (measured from 1.7V to 0.7V)         0.4         0.8           Jitter (cycle to cycle)         -         -	Output frequency         30         -         50           Frequency Deviation         Input Frequency = 30MHz         -         ± 1.10         -           Input Frequency = 50MHz         -         ± 0.65         -           Output rise time (measured from 0.7V to 1.7V)         0.7         1.3         1.6           Output fall time (measured from 1.7V to 0.7V)         0.4         0.8         1.0           Jitter (cycle to cycle)         -         -         -         200

 $<sup>^{\</sup>star}$  XIN /CLKIN pin and PD pin are pulled low  $^{\star\star}$  V<sub>DD</sub> and XIN/CLKIN input are stable, PD pin is made high from low.

DC Electrical Characteristics for 3.3V Supply (Test condition: All parameters are measured at room temperature (+ 25°C) unless otherwise stated)


Symbol	Parameter	Min	Тур	Max	Unit
V <sub>IL</sub>	Input low voltage	V <sub>SS</sub> - 0.3	-	0.8	V
$V_{IH}$	Input high voltage	2.0	-	V <sub>DD</sub> + 0.3	V
I <sub>IL</sub>	Input low current	-	-	-35	μA
I <sub>IH</sub>	Input high current	-	-	35	μA
I <sub>XOL</sub>	XOUT output low current (@0.4V, V <sub>DD</sub> =3.3V)	-	3	-	mA
I <sub>XOH</sub>	XOUT output high current (@2.5V, V <sub>DD</sub> =3.3V)	-	3	-	mA
$V_{OL}$	Output low voltage (V <sub>DD</sub> = 3.3 V, I <sub>OL</sub> = 8mA)	-	-	0.4	V
$V_{OH}$	Output high voltage (V <sub>DD</sub> = 3.3 V, I <sub>OH</sub> = 8mA)	2.5	•	-	V
$I_{DD}$	Static supply current*	-	-	10	uA
I <sub>CC</sub>	Dynamic supply current (3.3V, 46MHz and no load)	-	5.0	-	mA
$V_{DD}$	Operating Voltage	2.7	3.3	3.6	V
t <sub>ON</sub>	Power-up time (first locked cycle after power-up)**	-	-	5	mS
Zout	Output impedance	-	45	-	Ω

**AC Electrical Characteristics for 3.3V Supply** 

Symbol	P	Parameter				Unit
CLKIN	Input frequency		30	-	50	MHz
ModOUT	Output frequency	Output frequency		-	50	MHz
f <sub>d</sub>	Frequency Deviation	Input Frequency = 30MHz	-	±1.10	-	%
·u	Input Frequency = 50MHz		-	± 0.65	-	,,,
t <sub>LH</sub> *	Output rise time (measur	Output rise time (measured from 0.8 to 2.0V)		1.1	1.4	nS
t <sub>HL</sub> *	Output fall time (measure	Output fall time (measured at 2.0V to 0.8V)		0.8	1.1	nS
t <sub>JC</sub>	Jitter (cycle to cycle)	Jitter (cycle to cycle)		-	200	pS
t <sub>D</sub>	Output duty cycle		45	50	55	%
*t <sub>LH</sub> and t <sub>HL</sub> are measured	into a capacitive load of 15pF		*			•

<sup>\*</sup> XIN /CLKIN pin and  $\overline{PD}$  pin are pulled low \*\* V<sub>DD</sub> and XIN/CLKIN input are stable, PD pin is made high from low.

# **Typical Crystal Oscillator Circuit**

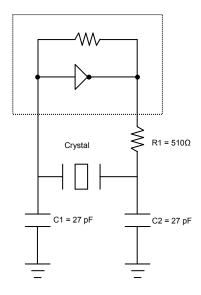

# **Typical Crystal Specifications**


Fundamental AT cut parallel resonant crystal					
Nominal frequency	33MHz				
Frequency tolerance	± 50ppm or better at 25°C				
Operating temperature range	-25°C to +85°C				
Storage temperature	-40°C to +85°C				
Load capacitance	18pF				
Shunt capacitance	7pF maximum				
ESR	25Ω				



rev 1.5

## **Package Information**

# 6-pin TSOT-23 Package

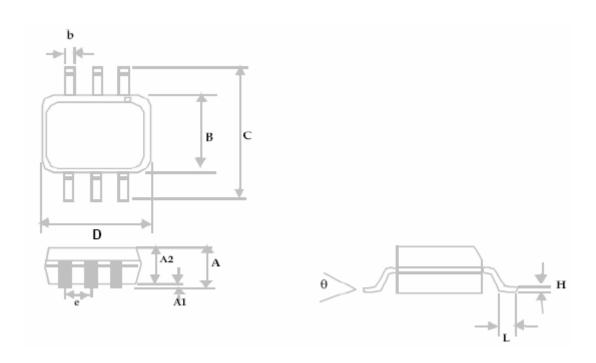


	Dimensions				
Symbol	In	ches	Milli	meters	
	Min	Max	Min	Max	
Α		0.04		1.00	
A1	0.00	0.004	0.00	0.10	
A2	0.033	0.036	0.84	0.90	
b	0.012	0.02	0.30	0.50	
Н	0.00	05 BSC	0.127 BSC		
D	0.11	14 BSC	2.90 BSC		
В	0.0	6 BSC	1.60 BSC		
е	0.0374 BSC		0.950 BSC		
С	0.11 BSC		2.80	0 BSC	
L	0.0118	0.02	0.30	0.50	
θ	0°	4°	0°	4°	



rev 1.5

# 8-Pin SOIC Package

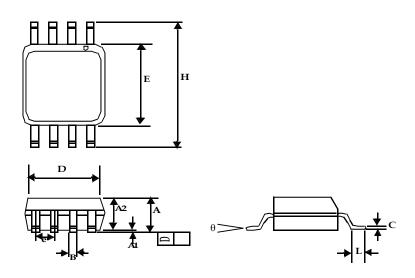



	Dimensions				
Symbol	Inc	hes	Millimeters		
	Min	Max	Min	Max	
A1	0.004	0.010	0.10	0.25	
А	0.053	0.069	1.35	1.75	
A2	0.049	0.059	1.25	1.50	
В	0.012	0.020	0.31	0.51	
С	0.007	0.010	0.18	0.25	
D	0.193	BSC	4.90 BSC		
E	0.154	BSC	3.9	1 BSC	
е	0.050	BSC	1.27 BSC		
Н	0.236 BSC		6.00	0 BSC	
L	0.016	0.050	0.41	1.27	
θ	0°	8°	0°	8°	



rev 1.5

# 8-Pin TSSOP Package

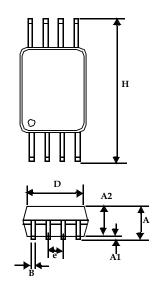



	Dimensions				
Symbol	Inches		Millimeters		
	Min	Max	Min	Max	
Α		0.043		1.10	
A1	0.002	0.006	0.05	0.15	
A2	0.033	0.037	0.85	0.95	
В	0.008	0.012	0.19	0.30	
С	0.004	0.008	0.09	0.20	
D	0.114	0.122	2.90	3.10	
E	0.169	0.177	4.30	4.50	
е	0.026 BSC		0.65 BSC		
Н	0.252 BSC		6.40 BSC		
L	0.020	0.028	0.50	0.70	
θ	0°	8°	0°	8°	




rev 1.5

## **Ordering Information**

Part Number	Marking	Package Type	Temperature
ASM3P2780AF-06OR	G4LL	6-Pin TSOT-23, TAPE & REEL, Pb Free	Commercial
ASM3P2780AF-08TT	3P2780AF	8-Pin TSSOP, TUBE, Pb Free	Commercial
ASM3P2780AF-08TR	3P2780AF	8-Pin TSSOP, TAPE & REEL, Pb Free	Commercial
ASM3P2780AF-08ST	3P2780AF	8-Pin SOIC, TUBE, Pb Free	Commercial
ASM3P2780AF-08SR	3P2780AF	8-Pin SOIC, TAPE & REEL, Pb Free	Commercial
ASM3P2780AG-06OR	G3LL	6-Pin TSOT-23, TAPE & REEL, Green	Commercial
ASM3P2780AG-08TT	3P2780AG	8-Pin TSSOP, TUBE, Green	Commercial
ASM3P2780AG-08TR	3P2780AG	8-Pin TSSOP, TAPE & REEL, Green	Commercial
ASM3P2780AG-08ST	3P2780AG	8-Pin SOIC, TUBE, Green	Commercial
ASM3P2780AG-08SR	3P2780AG	8-Pin SOIC, TAPE & REEL, Green	Commercial
ASM3P2780A-06OR	G1LL	6-Pin TSOT-23, TAPE & REEL	Commercial
ASM3P2780A-08TT	3P2780A	8-Pin TSSOP, TUBE	Commercial
ASM3P2780A-08TR	3P2780A	8-Pin TSSOP, TAPE & REEL	Commercial
ASM3P2780A-08ST	3P2780A	8-Pin SOIC, TUBE	Commercial
ASM3P2780A-08SR	3P2780A	8-Pin SOIC, TAPE & REEL	Commercial
ASM3I2780AF-06OR	G5LL	6-Pin TSOT-23, TAPE & REEL, Pb Free	Industrial
ASM3I2780AF-08TT	3I2780AF	8-Pin TSSOP, TUBE, Pb Free	Industrial
ASM3I2780AF-08TR	3I2780AF	8-Pin TSSOP, TAPE & REEL, Pb Free	Industrial
ASM3I2780AF-08ST	3I2780AF	8-Pin SOIC, TUBE, Pb Free	Industrial
ASM3I2780AF-08SR	3I2780AF	8-Pin SOIC, TAPE & REEL, Pb Free	Industrial
ASM3I2780AG-06OR	G6LL	6-Pin TSOT-23, TAPE & REEL, Green	Industrial
ASM3I2780AG-08TT	3I2780AG	8-Pin TSSOP, TUBE, Green	Industrial
ASM3I2780AG-08TR	3I2780AG	8-Pin TSSOP, TAPE & REEL, Green	Industrial
ASM3I2780AG-08ST	3I2780AG	8-Pin SOIC, TUBE, Green	Industrial
ASM3I2780AG-08SR	3I2780AG	8-Pin SOIC, TAPE & REEL, Green	Industrial
ASM3I2780A-06OR	G2LL	6-Pin TSOT-23, TAPE & REEL	Industrial
ASM3I2780A-08TT	3I2780A	8-Pin TSSOP, TUBE	Industrial
ASM3I2780A-08TR	3I2780A	8-Pin TSSOP, TAPE & REEL	Industrial
ASM3I2780A-08ST	3I2780A	8-Pin SOIC, TUBE	Industrial
ASM3I2780A-08SR	3I2780A	8-Pin SOIC, TAPE & REEL	Industrial



#### **Device Ordering Information**

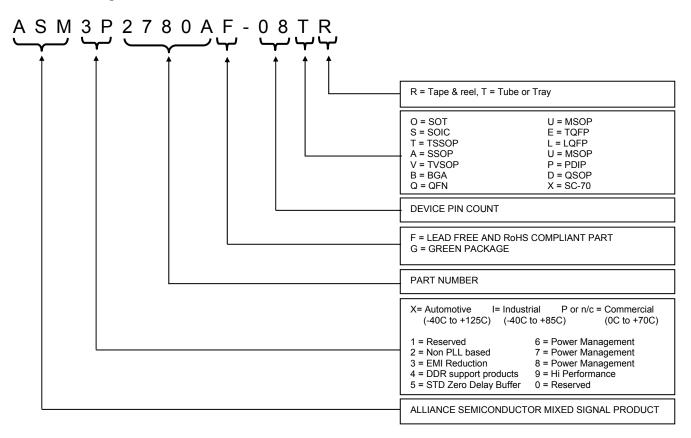

Licensed under U.S Patent Nos 5,488,627 and 5,631,921



Alliance Semiconductor Corporation 2575 Augustine Drive, Santa Clara, CA 95054 Tel# 408-855-4900 Fax: 408-855-4999 www.alsc.com Copyright © Alliance Semiconductor All Rights Reserved Preliminary Information Part Number: ASM3P2780A Document Version: v1.5

Note: This product utilizes US Patent #6,646,463 Impedance Emulator Patent issued to Alliance Semiconductor, dated 11-11-2003

© Copyright 2003 Alliance Semiconductor Corporation. All rights reserved. Our three-point logo, our name and Intelliwatt are trademarks or registered trademarks of Alliance. All other brand and product names may be the trademarks of their respective companies. Alliance reserves the right to make changes to this document and its products at any time without notice. Alliance assumes no responsibility for any errors that may appear in this document. The data contained herein represents Alliance's best data and/or estimates at the time of issuance. Alliance reserves the right to change or correct this data at any time, without notice. If the product described herein is under development, significant changes to these specifications are possible. The information in this product data sheet is intended to be general descriptive information for potential customers and users, and is not intended to operate as, or provide, any guarantee or warrantee to any user or customer. Alliance does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of Alliance products including liability or warranties related to fitness for a particular purpose, merchantability, or infringement of any intellectual property rights, except as express agreed to in Alliance's Terms and Conditions of Sale (which are available from Alliance). All sales of Alliance products are made exclusively according to Alliance's Terms and Conditions of Sale. The purchase of products from Alliance does not convey a license under any patent rights, copyrights; mask works rights, trademarks, or any other intellectual property rights of Alliance or third parties. Alliance does not authorize its products for use as critical components in life-supporting systems where a malfunction or failure may reasonably be expected to result in significant injury to the user, and the inclusion of Alliance products in such life-supporting systems implies that the manufacturer assumes all risk of such use and agrees to indemnify Alliance against all claims arising from such use.