

GP1600FSM12

Single Switch IGBT Module

Advance Information

DS5451-1.2 October 2001

FEATURES

- High Thermal Cycling Capability
- 1600A Per Module
- Non Punch Through Silicon
- Isolated MMC Base with AIN Substrates

APPLICATIONS

- High Reliability Inverters
- Motor Controllers
- Traction Drives
- Resonant Converters

The Powerline range of high power modules includes half bridge, chopper, dual and single switch configurations covering voltages from 600V to 3300V and currents up to 2400A.

The GP1600FSM12 is a singlel switch 1200V, n channel enhancement mode, insulated gate bipolar transistor (IGBT) module. The IGBT has a wide reverse bias safe operating area (RBSOA) ensuring reliability in demanding applications. This device is optimised for traction drives and other applications requiring high thermal cycling capability or very high reliability.

The module incorporates an electrically isolated base plate and low inductance construction enabling circuit designers to optimise circuit layouts and utilise earthed heat sinks for safety.

ORDERING INFORMATION

Order As:

GP1600FSM12

Note: When ordering, please use the complete part number.

KEY PARAMETERS

 $\begin{array}{lll} \textbf{V}_{\text{CES}} & \textbf{1200V} \\ \textbf{V}_{\text{CE(sat)}} & \textbf{(typ)} & \textbf{2.7V} \\ \textbf{I}_{\text{C}} & \textbf{(max)} & \textbf{1600A} \\ \textbf{I}_{\text{C(PK)}} & \textbf{(max)} & \textbf{3200A} \end{array}$

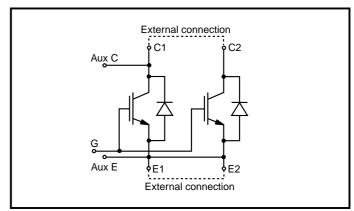


Fig.1 Single switch circuit diagram

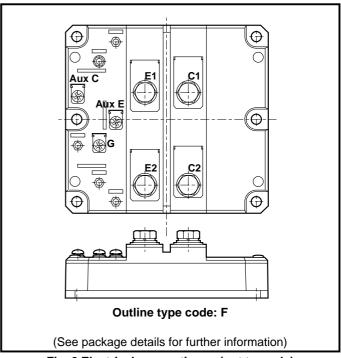


Fig. 2 Electrical connections - (not to scale)



ABSOLUTE MAXIMUM RATINGS

Stresses above those listed under 'Absolute Maximum Ratings' may cause permanent damage to the device. In extreme conditions, as with all semiconductors, this may include potentially hazardous rupture of the package. Appropriate safety precautions should always be followed. Exposure to Absolute Maximum Ratings may affect device reliability.

T_{case} = 25°C unless stated otherwise

Symbol	Parameter	Test Conditions	Max.	Units
V _{CES}	Collector-emitter voltage	$V_{GE} = 0V$	1200	V
V_{GES}	Gate-emitter voltage	-	±20	V
I _c	Collector current	DC, T _{case} = 82°C	1600	Α
I _{CM}		1ms, T _{case} = 112°C	3200	Α
P _{max}	Maximum power dissipation	T _{case} = 25°C (Transistor)	13.9	kW
V _{isol}	Isolation voltage	Commoned terminals to base plate. AC RMS, 1 min, 50Hz	2500	V

THERMAL AND MECHANICAL RATINGS

Symbol	Parameter	Conditions	Min.	Max.	Units
R _{th(j-c)}	Thermal resistance - transistor	DC junction to case	-	9	°C/kW
R _{th(j-c)}	Thermal resistance - diode	DC junction to case -	-	20	°C/kW
R _{th(c-h)}	Thermal resistance - Case to heatsink (per module)	Mounting torque 5Nm (with mounting grease)	-	8	°C/kW
T _j	Junction temperature	Transistor	-	150	°C
		Diode	-	125	°C
T _{stg}	Storage temperature range	-	-40	125	°C
-	Screw torque	Mounting - M6	-	5	Nm
		Electrical connections - M4	-	2	Nm
		Electrical connections - M8	-	10	Nm



ELECTRICAL CHARACTERISTICS

T_{case} = 25°C unless stated otherwise.

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Units
I _{CES}	Collector cut-off current	$V_{GE} = 0V, V_{CE} = V_{CES}$	-	-	2	mA
		$V_{GE} = 0V, V_{CE} = V_{CES}, T_{case} = 125^{\circ}C$	-	-	75	mA
I _{GES}	Gate leakage current	$V_{GE} = \pm 20V, V_{CE} = 0V$	-	-	8	μΑ
$V_{\text{GE(TH)}}$	Gate threshold voltage	$I_{\rm C}$ = 120mA, $V_{\rm GE}$ = $V_{\rm CE}$	4.5	-	6.5	V
V	Collector-emitter saturation voltage	V _{GE} = 15V, I _C =1600A	-	2.7	3.5	V
V _{CE(SAT)}		V _{GE} = 15V, I _C = 1600A, T _{case} = 125°C	-	3.2	4.0	V
I _F	Diode forward current	DC	-	-	1600	Α
I _{FM}	Diode maximum forward current	t _p = 1ms	-	-	3200	Α
V _F	Diode forward voltage	I _F =1600A	-	2.2	2.4	V
		I _F =1600A, T _{case} = 125°C	-	2.3	2.5	V
C _{ies}	Input capacitance	V _{CE} = 25V, V _{GE} = 0V, f = 1MHz	-	180	-	nF
L _M	Module inductance	-	-	15	-	nH



INDUCTIVE SWITCHING CHARACTERISTICS

T_{case} = 25°C unless stated otherwise


Symbol	Parameter	Conditions	Min.	Тур.	Max.	Units
t _{d(off)}	Turn-off delay time	$I_{c} = 1600A$ $V_{GE} = \pm 15V$ $V_{CE} = 600$ $R_{G(ON)} = R_{G(OFF)} = 3.3\Omega$ $L \sim 100nH$	-	1650	1800	ns
t _f	Fall time		-	200	250	ns
E _{OFF}	Turn-off energy loss		-	350	450	mJ
t _{d(on)}	Turn-on delay time		-	1600	1750	ns
t _r	Rise time		-	450	550	ns
E _{on}	Turn-on energy loss		-	160	200	mJ
Q _{rr}	Diode reverse recovery charge	$I_{F} = 1600A$ $V_{R} = 50\%V_{CES}$, $dI_{F}/dt = 2000A/\mu s$	-	100	130	μC

T_{case} = 125°C unless stated otherwise.

t _{d(off)}	Turn-off delay time	I _C = 1600A	-	1900	2100	ns
t _f	Fall time		-	250	300	ns
E _{OFF}	Turn-off energy loss	$V_{GE} = \pm 15V$	-	400	500	mJ
t _{d(on)}	Turn-on delay time	$V_{CE} = 600$ $R_{G(ON)} = R_{G(OFF)} = 3.3\Omega$ $L \sim 100 \text{nH}$	-	1750	2000	ns
t,	Rise time		-	500	550	ns
E _{on}	Turn-on energy loss		-	250	350	mJ
Q _{rr}	Diode reverse recovery charge	$I_F = 1600A$ $V_R = 50\%V_{CES}$, $dI_F/dt = 2000A/\mu s$	-	250	350	μC



CURVES

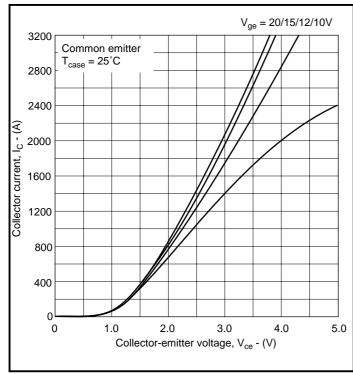

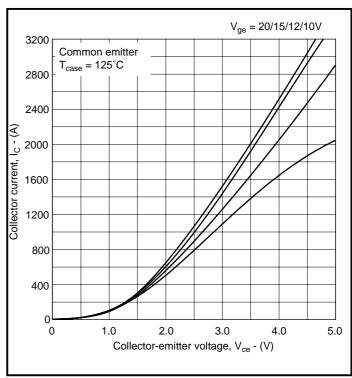
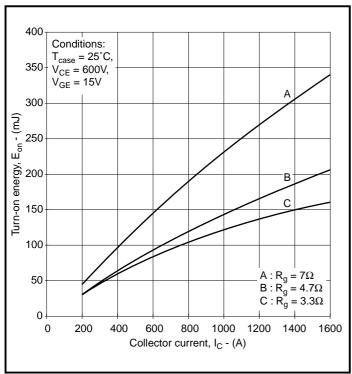



Fig.5 Typical output characteristics

Fig.6 Typical output characteristics





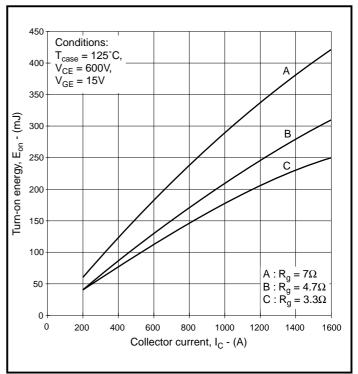
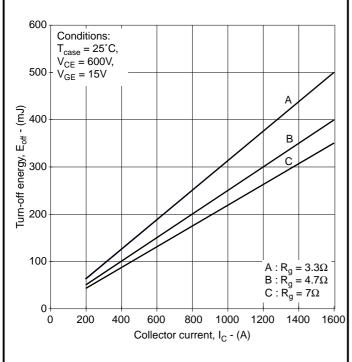


Fig.8 Typical turn-on energy vs collector current





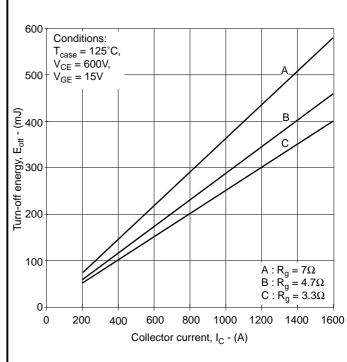


Fig.9 Typical turn-off energy vs collector current

Fig.10 Typical turn-off energy vs collector current

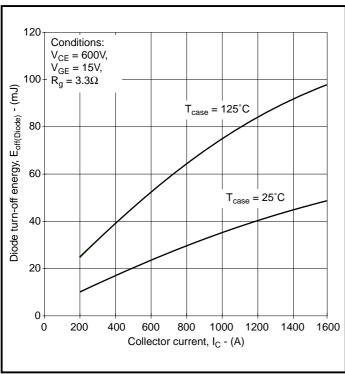


Fig.11 Typical diode turn-off energy vs collector current

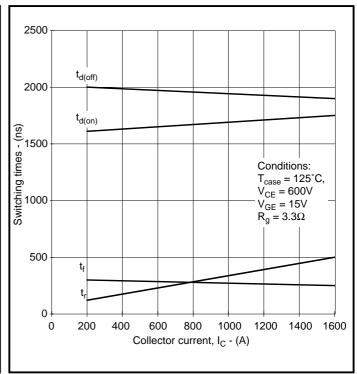
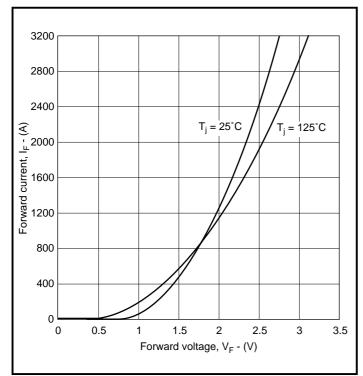


Fig.12 Typical switching times





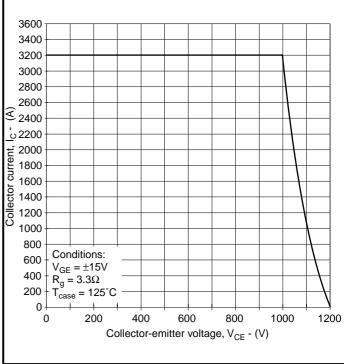
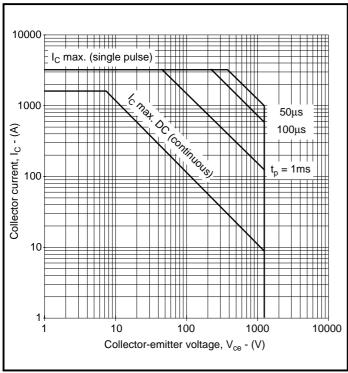



Fig.13 Diode typical forward characteristics

Fig.14 Reverse bias safe operating area





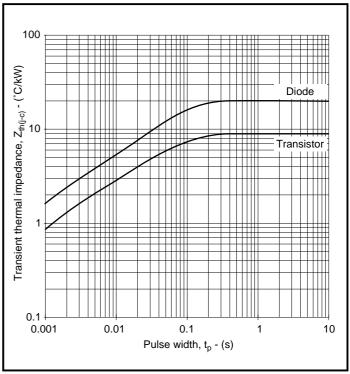


Fig.16 Transient thermal impedance




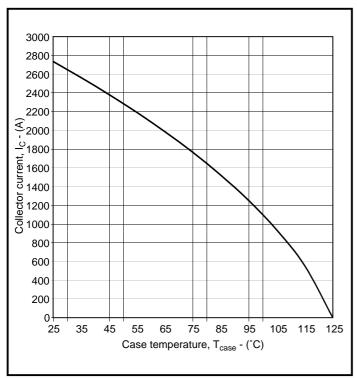


Fig.17 DC current rating vs case temperature



PACKAGE DETAILS

For further package information, please contact your nearest Customer Service Centre. All dimensions in mm, unless stated otherwise. DO NOT SCALE.

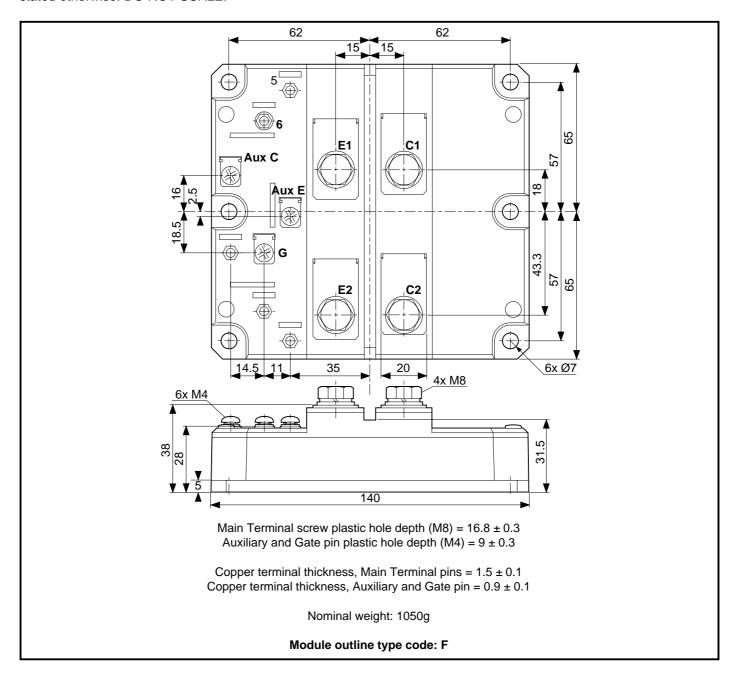



POWER ASSEMBLY CAPABILITY

The Power Assembly group was set up to provide a support service for those customers requiring more than the basic semiconductor, and has developed a flexible range of heatsink / clamping systems in line with advances in device types and the voltage and current capability of our semiconductors.

We offer an extensive range of air and liquid cooled assemblies covering the full range of circuit designs in general use today. The Assembly group continues to offer high quality engineering support dedicated to designing new units to satisfy the growing needs of our customers.

Using the up to date CAD methods our team of design and applications engineers aim to provide the Power Assembly Complete solution (PACs).

HEATSINKS

Power Assembly has it's own proprietary range of extruded aluminium heatsinks. They have been designed to optimise the performance or our semiconductors. Data with respect to air natural, forced air and liquid cooling (with flow rates) is available on request.

For further information on device clamps, heatsinks and assemblies, please contact your nearest Sales Representative or the factory.



http://www.dynexsemi.com

e-mail: power_solutions@dynexsemi.com

HEADQUARTERS OPERATIONS
DYNEX SEMICONDUCTOR LTD

Doddington Road, Lincoln. Lincolnshire. LN6 3LF. United Kingdom. Tel: 00-44-(0)1522-500500

Fax: 00-44-(0)1522-500500

DYNEX POWER INC.

99 Bank Street, Suite 410, Ottawa, Ontario, Canada, K1P 6B9 Tel: 613.723.7035

Fax: 613.723.1518

Toll Free: 1.888.33.DYNEX (39639)

CUSTOMER SERVICE CENTRES

Mainland Europe Tel: +33 (0)1 58 04 91 00. Fax: +33 (0)1 46 38 51 33

North America Tel: (613) 723-7035. Fax: (613) 723-1518.

UK, Scandinavia & Rest Of World Tel: +44 (0)1522 502901 / 502753. Fax: +44 (0)1522 500020

SALES OFFICES

Mainland Europe Tel: +33 (0)1 58 04 91 00. Fax: +33 (0)1 46 38 51 33

North America Tel: (613) 723-7035. Fax: (613) 723-1518. Toll Free: 1.888.33.DYNEX (39639) /

Tel: (949) 733-3005. Fax: (949) 733-2986.

 $\textbf{UK, Scandinavia \& Rest Of World Tel: } + 44\ (0)1522\ 502901\ /\ 502753.\ Fax: \\ + 44\ (0)1522\ 500020$

These offices are supported by Representatives and Distributors in many countries world-wide.

© Dynex Semiconductor 2001 Publication No. DS5451-1 Issue No. 1.2 October 2001 TECHNICAL DOCUMENTATION – NOT FOR RESALE. PRINTED IN UNITED KINGDOM

Datasheet Annotations:

Dynex Semiconductor annotate datasheets in the top right hard corner of the front page, to indicate product status. The annotations are as follows:-

Target Information: This is the most tentative form of information and represents a very preliminary specification. No actual design work on the product has been started.

Preliminary Information: The product is in design and development. The datasheet represents the product as it is understood but details may change.

No Annotation: The product parameters are fixed and the product is available to datasheet specification.

Advance Information: The product design is complete and final characterisation for volume production is well in hand.

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior notice the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.

All brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.

10/10

Caution: This device is sensitive to electrostatic discharge. Users should follow ESD handling procedures.