

Rev. 1.4

FEATURES

- 2.5V~5.5V Power supply.
- Thermal shutdown Protection.
- Low current shutdown mode
- No capacitors and networks or bootstrap capacitors required
- Low noise during turn-on and turn-off transitions
- Headphone amplifier mode.
- Shutdown pin high active.
- Lead free and green package available. (RoHS Compliant)
- Space Saving Package
 - -- 8-pin MSOP package.

GENERAL DESCRIPTION

The LY8893 is a 1.4 Watt audio power amplifier. And the LY8893 primarily designed for high quality application in other portable communication device. It is capable of driving 8 Ω speaker load at a continuous average output of 1.4W / 10% distortion (THD+N) from a 5.0V power supply.

LY8893


A feature of the LY8893 amplifier to switch BTL mode and headphone mode (single-ended) is accomplished using the headphone sense pin. And the LY8893 audio amplifier features low power consumption shutdown mode. It is achieved by driving the shutdown pin with logic high. Besides the LY8893 has an internal thermal shutdown protection feature.


The LY8893 amplifier was designed specifically to provide high quality output power with a minimal amount of external components. The LY8893 does not require output capacitors, and the LY8893 is ideally suited for other low voltage applications or portable electronic devices where minimal power consumption is a primary requirement.

APPLICATION

- Portable electronic devices
- Mobile Phones
- PDAs

PIN CONFIGURATION



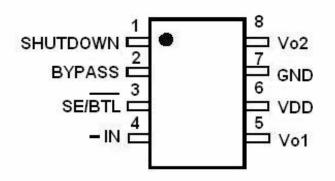





Rev. 1.4

PIN DESCRIPTION

SYMBOL	PIN No.	DESCRIPTION		
OTMBOL	MSOP			
SHUTDOWN	1	Shutdown the device.(when HIGH level is active the pin)		
BYPASS	2	Bypass pin		
SE/BTL	3	SE and BTL select pin.(when HIGH level is SE mode, when LOW level is BTL mode.)		
-IN	4	Audio input		
Vo1	5	Negative output		
Vdd	6	Power supply		
GND	7	Ground		
Vo2	8	Positive output		

APPLICATION CIRCUIT

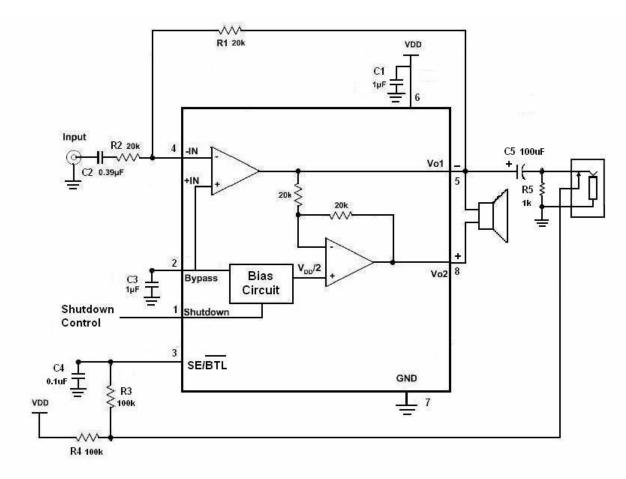





Rev. 1.4

ABSOLUTE MAXIMUN RATINGS*

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	Vdd	6.0	V
Operating Temperature	Та	-40 to 85 (I grade)	°C
Input Voltage	Vi	-0.3V to VDD +0.3V	V
Storage Temperature	Тѕтс	-65 to 150	°C
Power Dissipation	PD	Internally Limited	W
ESD Susceptibility	Vesd	2000	V
Junction Temperature	Тјмах	150	°C
Soldering Temperature (under 10 sec)	TSOLDER	260	°C

DC ELECTRICAL CHARACTERISTICS (VDD=5V, TA=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Power Supply Current	מס	V_{IN} = 0V, I _O = 0A, No Load	-	3.5	9.0	mA
Power Supply Current	UUI	V_{IN} = 0V, I _O = 0A, 8 Ω Load	-	4.0	10.0	mA
Shutdown Current	Isd	Vshutdown = 0V	-	0.1	2.0	μA
HP Sense high input voltage	Vih		0.8xVdd	-	-	V
HP Sense low input voltage	VIL		-	-	0.2xV _{DD}	V
Wake-up time	Τwu	Bypass cap. = 1.0uF	-	176		ms
Output Offset Voltage	Vos		-	7.0	50.0	mV
		THD = 10% , f = 1 kHz RL = 8Ω, HP Sense < 0.2xV _{DD}		1.4		W
Output Power	Po	THD = 1% , f = 1 kHz RL = 8Ω, HP Sense < 0.2xV _{DD}	-	1.0	-	w
		THD = 1% (max), f = 1kHz, RL = 32Ω, HP Sense > 0.8xV _{DD}	-	90		mW
Total Harmonic Distortion+ Noise	THD+N	Po = 0.4 Wrms; f = 1kHz	-	0.13		%
Power Supply Rejection Ratio	PSRR	Vripple = 200mV sine p-p Input terminated with 10Ω to GND	-	62 (f = 217Hz) 66 (f = 1kHz)	-	dB
Thermal Shutdown Temperature	Tsd		150	170	190	°C
Shut Down Time	TSDT	8 Ω load		1.0		ms




1.4 Watt Audio power Amplifier with Active-high shutdown mode

Rev. 1.4

DC ELECTRICAL CHARACTERISTICS (VDD=3V, TA=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Dower Supply Current	1	V_{IN} = 0V, I _O = 0A, No Load	-	3.0	8.0	mA
Power Supply Current	IDD	V_{IN} = 0V, I _O = 0A, 8 Ω Load	-	3.5	9.0	mA
Shutdown Current	Isd	Vshutdown = 0V	-	0.1	2.0	μA
HP Sense high input voltage	Vih		0.8xVdd	-	-	V
HP Sense low input voltage	VIL		-	-	$0.2xV_{DD}$	V
Output Offset Voltage	Vos		-	7.0	50.0	mV
Wake-up time	Τwu		-	114		ms
	Po	THD = 10% , f = 1 kHz RL = 8Ω, HP Sense < 0.2xV _{DD}		0.46		W
Output Power		THD = 1% , f = 1 kHz RL = 8Ω, HP Sense < 0.2xV _{DD}	-	0.375		W
		THD = 1% (max), f = 1kHz, RL = 32Ω , HP Sense > $0.8xV_{DD}$	-	35		mW
Total Harmonic Distortion+ Noise	THD+N	Po = 0.25 Wrms , f = 1kHz	-	0.13	-	%
Power Supply Rejection Ratio	PSRR	V_{ripple} = 200mV sine p-p Input terminated with 10 Ω to GND	-	56 (f = 217Hz) 62 (f = 1kHz)	-	dB
Thermal Shutdown Temperature	Tsd		150	170	190	°C

ORDERING INFORMATION

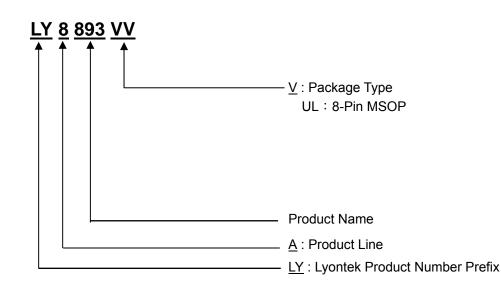

Lyontek Inc. reserves the rights to change the specifications and products without notice. 5F, No. 2, Industry E . Rd. IX, Science-Based Industrial Park, Hsinchu 300, Taiwan TEL: 886-3-6668838 FAX: 886-3-6668836





LY8893 1.4 Watt Audio power Amplifier with Active-high shutdown mode


PACKAGE OUTLINE DIMENSION


Rev. 1.4

8 pin 25.6 mil MSOP Package Outline Dimension









SYMBOLS	MIN,	NOM.	MAX.	
A		—	1.10	
A1	0.00	-	0.15	
A2	0.75	0.85	0.95	
D	3.00 BSC			
E	4.90 BSC			
E1	3.00 BSC			
L	0.40	0.60	0.80	
L1	0.95 REF			
θ,	0	_	8	
UNIT : MM				

- NOTES: 1.JEDEC OUTLINE : MO-187 AA 2.DIMENSION 'D' DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. 3.DIMENSION 'E1' DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 PER SIDE. 4.DIMENSION '0.22' DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 MM TOTAL IN EXCESS OF THE '0.22' DIMENSION AT MAXIMUM MATERIAL CONDITION, DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT. MINIMUM SPAC BETWEEN PROTRUSION AND ADJACENT LEAD IS 0.07 MM. 5.DIMENSIONS 'D' AND 'E1' TO BE DETERMINED AT DATUM PLANE □.

Lyontek Inc. reserves the rights to change the specifications and products without notice. 5F, No. 2, Industry E . Rd. IX, Science-Based Industrial Park, Hsinchu 300, Taiwan TEL: 886-3-6668838 FAX: 886-3-6668836