


# GBL005 THRU GBL10

## GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current - 4.0 Amperes

### Case Type GBL

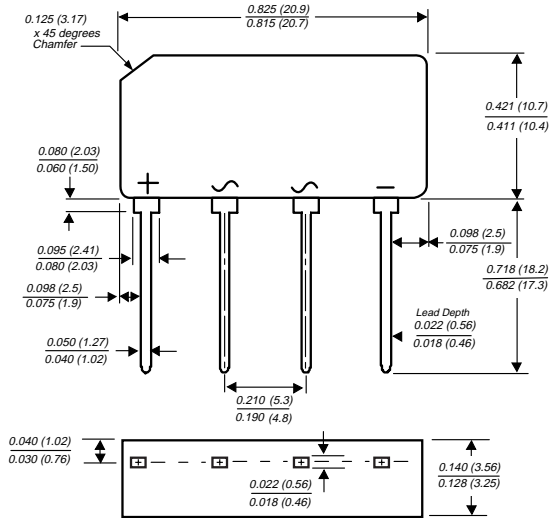


Polarity shown on front side of case: positive lead by beveled corner

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ This series is UL listed under the Recognized Component Index, file number E54214
- ◆ Glass passivated chip junctions
- ◆ High case dielectric strength
- ◆ Typical  $I_R$  less than  $0.1\mu A$
- ◆ High surge current capability
- ◆ Ideal for printed circuit boards
- ◆ High temperature soldering guaranteed:  
260°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension



### MECHANICAL DATA

**Case:** Molded plastic body over passivated junctions  
**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026

**Mounting Position:** Any

**Weight:** 0.071 ounce, 2.0 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.


	SYMBOLS	GBL 005	GBL 01	GBL 02	GBL 04	GBL 06	GBL 08	GBL 10	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified output current at	$I_{(AV)}$	4.0 3.0						Amps	
Peak forward surge current, single half sine-wave superimposed on rated load (JEDEC Method) $T_J=150^\circ C$	$I_{FSM}$	150.0						Amps	
Rating for fusing ( $t < 8.3ms$ )	$I^2t$	93.0						$A^2sec$	
Maximum instantaneous forward drop per leg at 4.0 Amperes	$V_F$	1.1						Volts	
Maximum DC reverse current at rated DC blocking voltage per leg	$I_R$	5.0 500.0						$\mu A$	
Typical junction capacitance per leg	$C_J$	95.0				40.0			$pF$
Typical thermal resistance per leg	$R_{\theta JA}$ $R_{\theta JL}$	22.0 3.5				$^\circ C/W$			
Operating junction storage and temperature range	$T_J, T_{STG}$	-55 to +150						$^\circ C$	

#### NOTES:


- (1) Unit mounted on 3.0 x 3.0 x 0.11" thick (7.5 x 7.5 x 0.3cm) Al. plate
- (2) Unit mounted on P.C.B. at 0.375" (9.5mm) lead length and 0.5 x 0.5" (12 x 12mm) copper pads
- (3) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

# RATINGS AND CHARACTERISTICS CURVES GBL005 THRU GBL10


**FIG. 1 - DERATING CURVES OUTPUT RECTIFIED CURRENT**

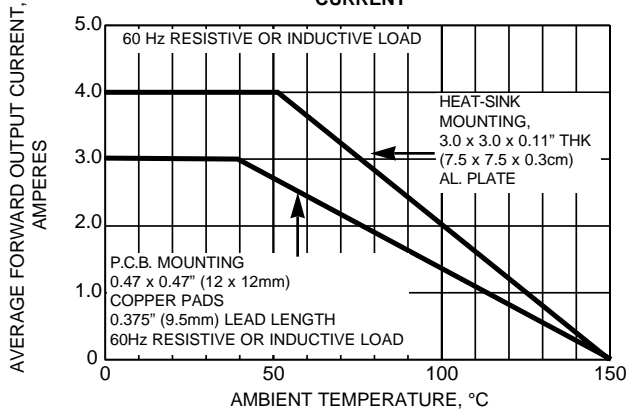


**FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG**

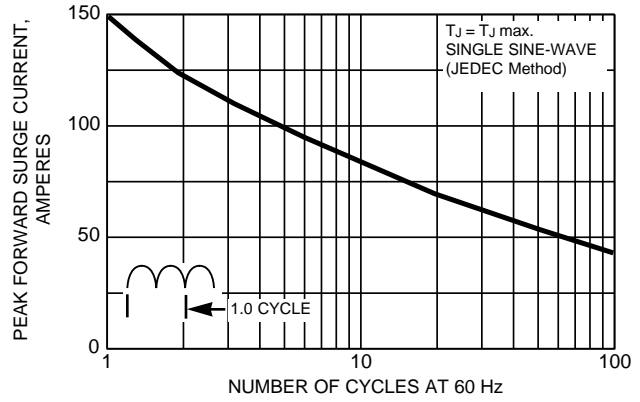


**FIG. 3 - TYPICAL FORWARD VOLTAGE CHARACTERISTICS PER LEG**

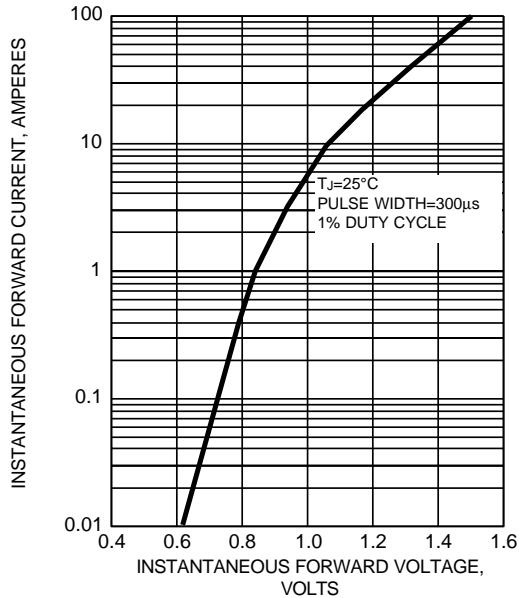

**FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG**

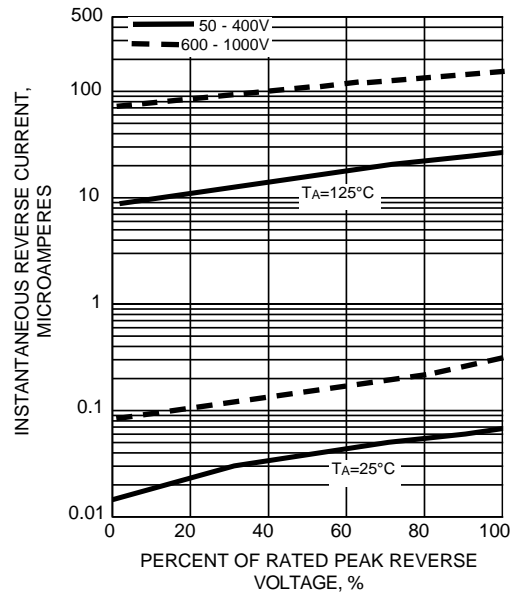

**FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER LEG**

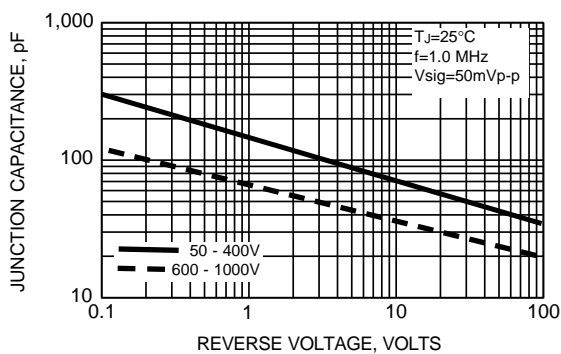

**FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG**

