



XVT9001

**19.200 MHz
VCTCXO**



- **Voltage Controlled Temperature Compensated Crystal Oscillator**
- **Excellent Frequency Stability & Low Phase**
- **3.2 x 2.5 x 1.3 mm Surface-Mount Case**
- **Complies with Directive 2002/95/EC (RoHS)**



Electrical Characteristics

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Nominal Frequency	Fo			19.20000		MHz
Storage Temperature Range			-40		+85	°C
Operating Temperature Range			-20		+70	°C
Power Supply Voltage	Vcc			2.8		V
Output Voltage with Load 10 pF 10 KΩ	Vout		0.8			V _{P-P}
Output Waveform			Clipped Sinewave			
Power Supply Current	Icc				2.0	mA
Control Voltage	Vcon			1.4±1.0		V
Control Voltage Input Impedance			100K			ohms
Frequency Tolerance (Vcon=1.4 V) after Two Reflows			±2 ppm max @ 25 °C ±3 °C			
Frequency Stability versus:						
Temperature (-20 to 70 °C)				±2.5		ppm
Load varied 10 pF 10 KΩ ±10%				±0.2		ppm
Supply Voltage varied 2.8±5%				±0.2		ppm
Vcon Frequency Control Range (1.4 ±1.0 V)			±8		±14	ppm
Start Up Time (90% of final RF level in V _{P-P})					2.0	ms
Harmonics					-5.0	dBc
Standard Shipping Quantity on 180 mm (7") Reel				1000		units
Lid Symbolization (in addition to Lot and/or Date Codes)			TBD			



CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.






Notes:

1. The design, manufacturing process, and specifications of this device are subject to change without notice.

SM3225-4 Case

4-Terminal Surface-Mount Seam Weld Case


3.2 x 2.5 mm Nominal Footprint

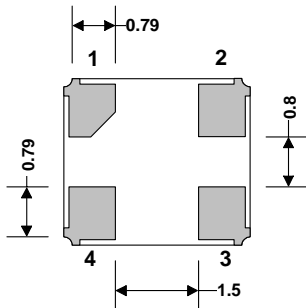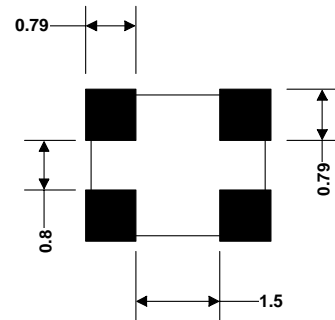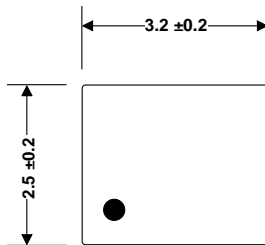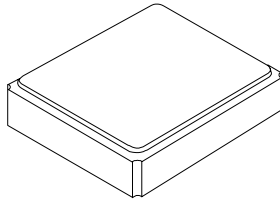


Dimensions in mm

Pin	Connection
1	Vcon
2	GND/CASE GND
3	Output
4	Vcc

Application Circuit

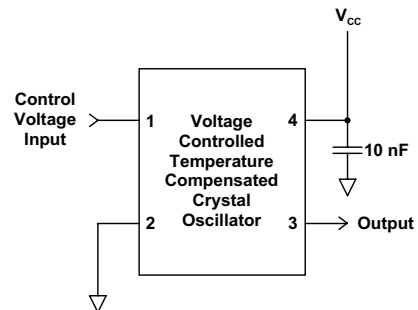


Reel Dimensions

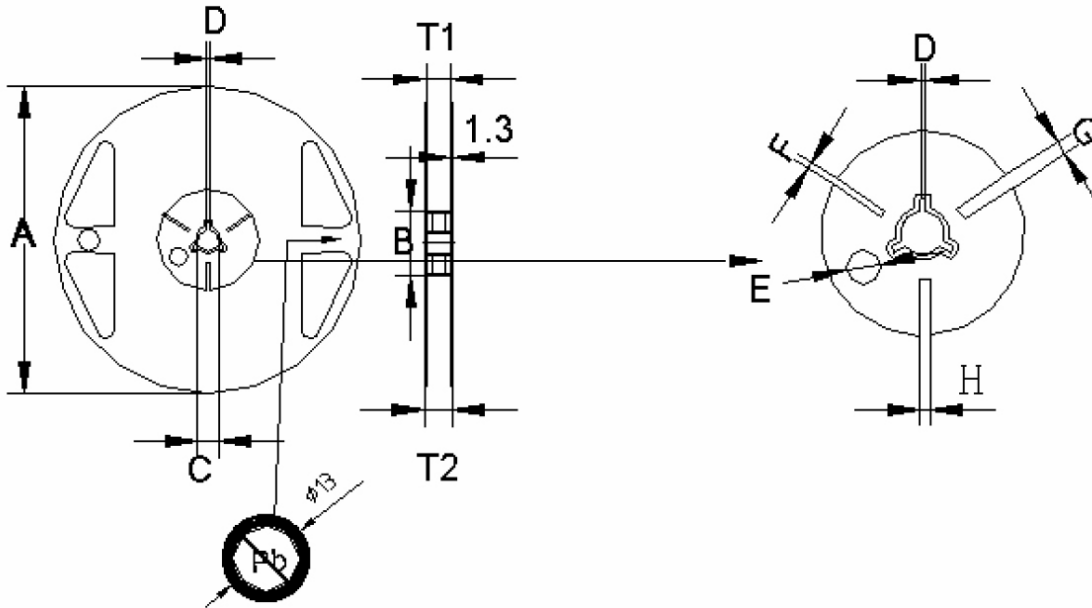

mm	A	B	C	D	E	F	G	H	T1	T2	T3
Dimension	180	60	13.0	2.0	9.1	2.9	4.9	3.9	9.0	11.4	1.2
Tolerance	±1.0	+1.0/-0.0	±0.2	±0.5	±0.5	±0.5	±0.5	±0.5	±0.3	±1.0	±0.1

Tape Dimensions

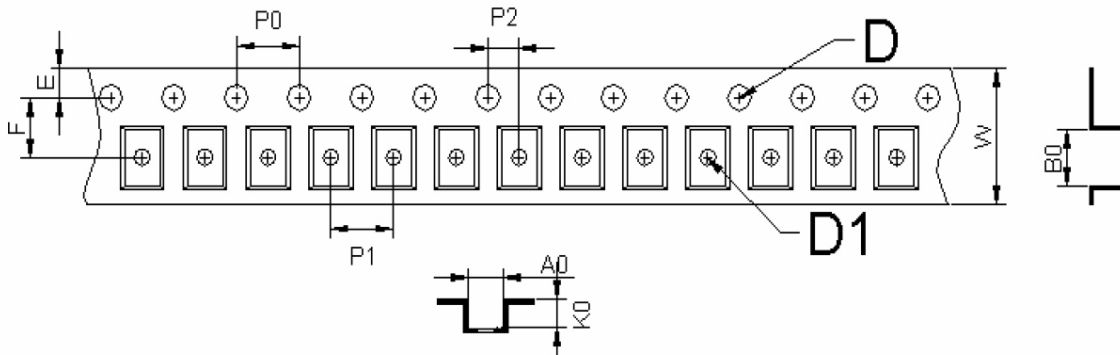

mm	A0	B0	W	F	E	P0	P1	P2	D1	D	K0	t
Dimension	2.80	3.71	8.00	3.50	1.75	4.00	4.00	2.00	1.50	1.00	1.75	0.25
Tolerance	±0.10	±0.10	+0.30/-0.10	±0.05	±0.10	±0.10	±0.10	±0.05	+0.10/-0.00	+0.25/-0.00	±0.10	±0.02