



SECCION E-E

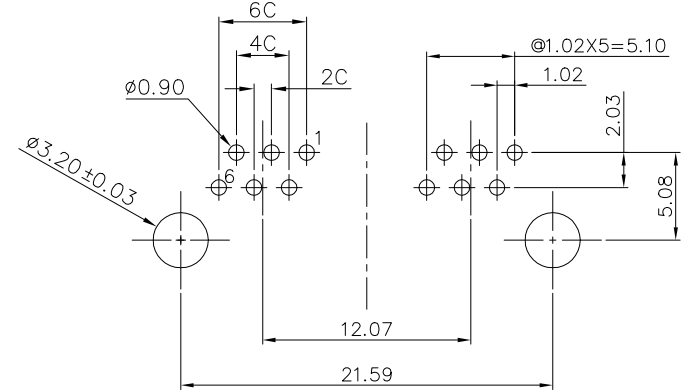

PC Board Layout Component Side Shown

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		Drawing Modify	sammy 11/23/01	
△		Drawing Modify	sammy 03/13/02	
△		Drawing Modify	sammy 09/16/02	
△		Add P/N	sammy 02/23/05	

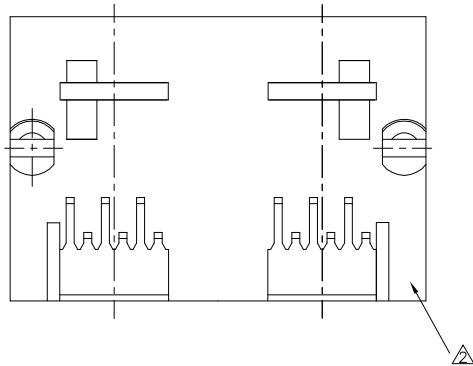

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : 1: CONTACT AREA- SELECTIVE GOLD PLATING.
2: TAILS- 150u" TIN-LEAD MIN OVER 50u" NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: E566X-W0AXXX

- 2-6P2C
- 4-6P4C
- 6-6P6C
- 1- 3u" 2- 6u"
- 3-15u" 4-30u"
- 5-50u"

- 7F-FR52 BK
- LF-FR52 GREY

DETACHED LISTS	← MM (INCH) →		DFTO WHF	DATE 08/25/01
	TOLERANCES EXCEPT AS NOTED		CHKD QIANPU	DATE 2005/2/24
	MM		MFO	DATE
	.0 ± 0.2	±	APPVLUSHENQ	DATE 2005/2/24
.00 ± 0.15	±	MATERIAL :		
.000 ± 0.075	±	QT'Y :		
ANGLES ± 0.5		FINISH :		SCALE : 3.5 : 1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SHEET OF

FULL RISE ELECTRONIC CO., LTD

TITLE
RJ11 DUAL PORT PCB JACK

DRAWING NO. GE563068
/PART NO. SEE NOTE

SIZE A3 REV 4