



TNC Female Bulkhead Mount Connector Solder Attachment Terminal IP67 Rated

RF Connectors Technical Data Sheet

PE45130

Configuration

- TNC Female Connector
- MIL-STD-348A
- 50 Ohms
- Straight Body Geometry
- Terminal Interface Type
- Solder Attachment
- Bulkhead

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz
VSWR			1.5:1	
Operating Voltage (AC)			500	Vrms

Mechanical Specifications

Size	
Length	1.23 in [31.24 mm]
Width/Dia.	0.571 in [14.50 mm]
Weight	0.041 lbs [18.6 g]


Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold
Insulation	Teflon	
Outer Conductor	Brass	Tri-Metal 80µ in. minimum
Body	Brass	Tri-Metal 80µ in. minimum

Environmental Specifications

Temperature Operating Range	-65 to 165 deg C
-----------------------------	------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and [TNC Female Bulkhead Mount Connector Solder Attachment Terminal IP67 Rated PE45130](#)

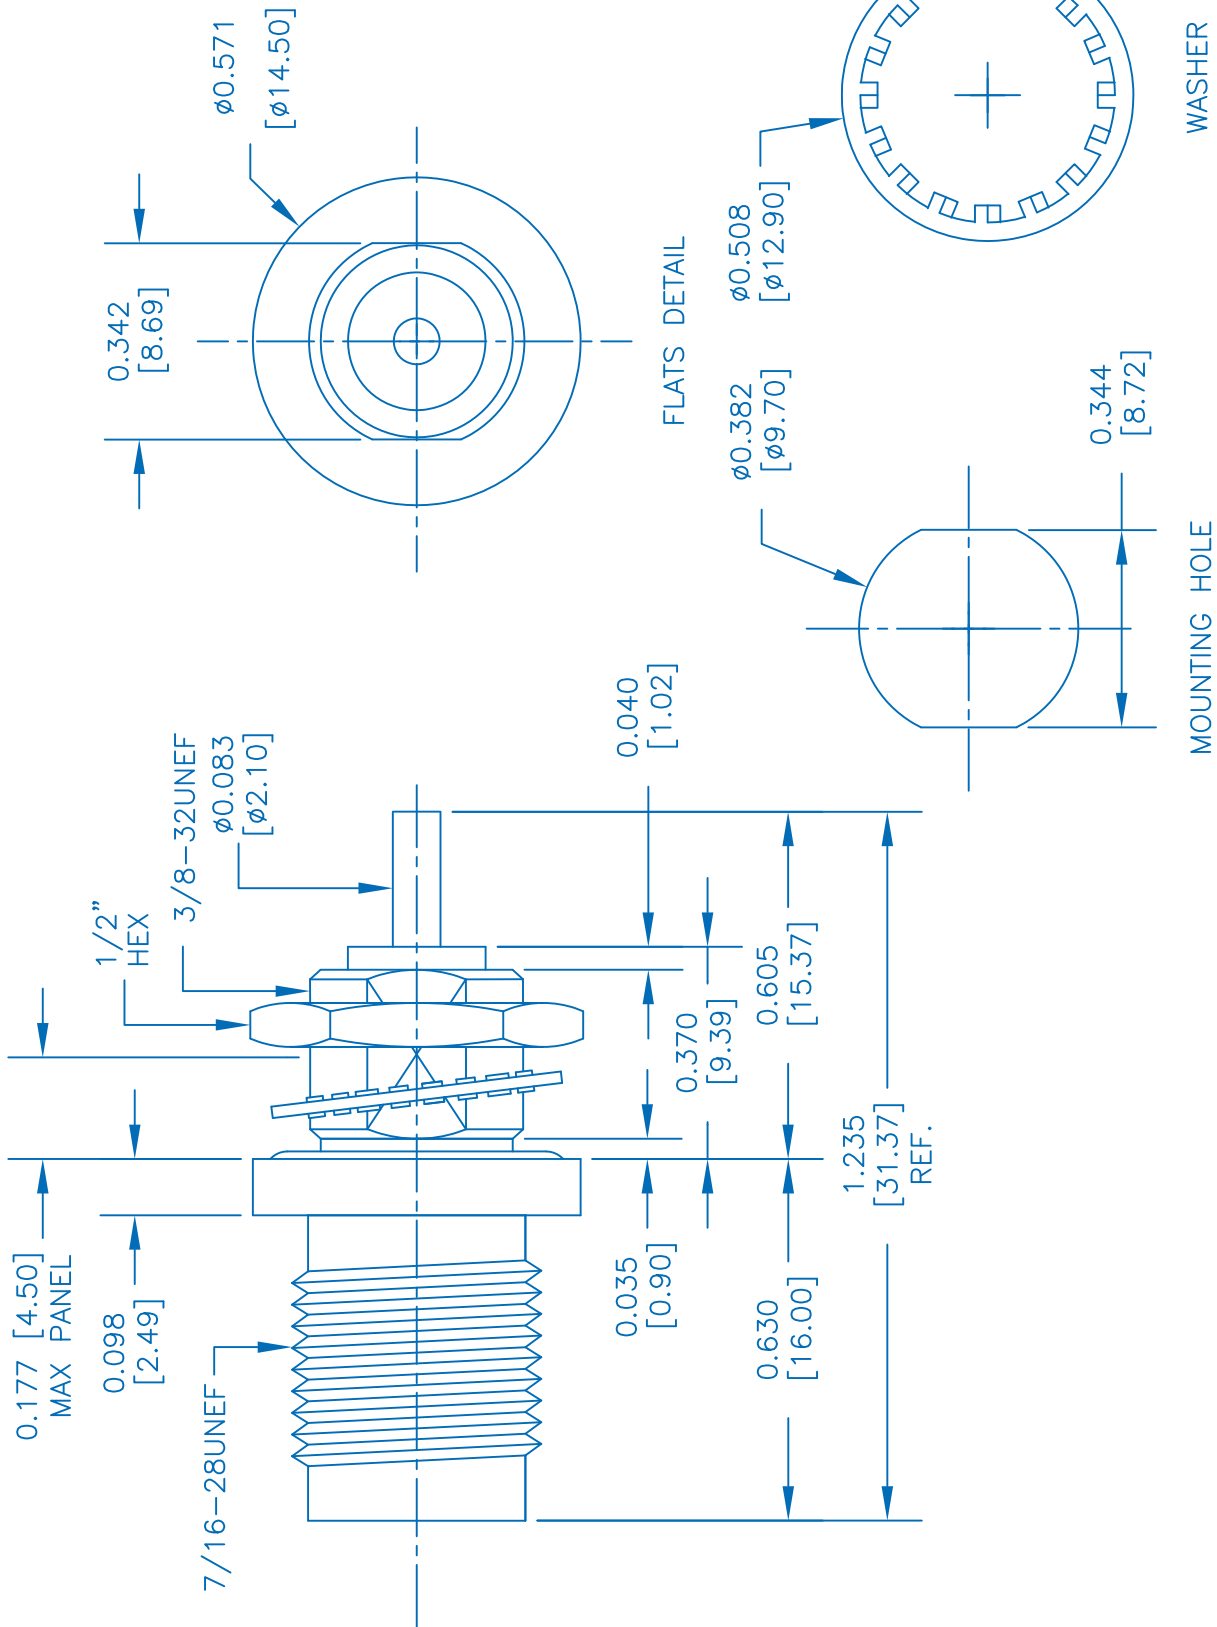

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	PE45130		
FSCM NO.	53919	CAD FILE	020315
SCALE	N/A	SIZE A	200

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com