



SAW Components

SAW Rx 4in1 input/output duplex filter

GSM850 / GSM900 / GSM1800 / GSM1900

Series/type:	B9838
Ordering code:	B39202B9838P810
Date:	December 18,2014
Version:	2.1

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.


Data sheet


Application


- Low-loss 4in1 RF filter for mobile telephone GSM 1900, GSM 1800, GSM 900 and GSM 850 systems, receive path (Rx)
- Usable passband:
 - Filter 1 (GSM 1900): 60 MHz
 - Filter 2 (GSM 1800): 75 MHz
 - Filter 3 (GSM 900): 35 MHz
 - Filter 4 (GSM 850): 25 MHz
- Unbalanced to balanced operation for all filters
- Impedance transformation from 50 Ω to 150 Ω for all filters
- Low amplitude ripple
- Suitable for GPRS class 1 to 12


Features

- Package size 1.8 x 1.4 x 0.4 mm³
- RoHS compatible
- Approx. weight 0.004g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitive Level 3**

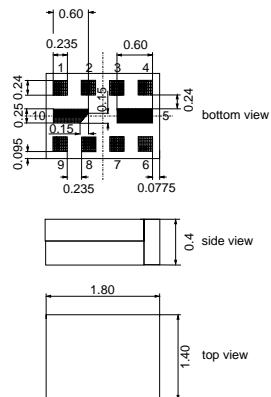
Pin configuration

- 1 Input [Diplex Filter 1 & 3]
- 4 Input [Diplex Filter 2 & 4]
- 6,7 Output, balanced [Diplex Filter 3 & 4]
- 8,9 Output, balanced [Diplex Filter 1 & 2]
- 2,3,5,10 To be grounded



Data sheet


Characteristics of Filter 1 (GSM1900)

Temperature range for specification: $T = -20\text{ }^{\circ}\text{C to }+85\text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega \parallel 6.3\ \text{nH}$
 Terminating load impedance: $Z_L = 150\ \Omega \parallel 9.0\ \text{nH}$

		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	1960.0	—	MHz
Maximum insertion attenuation	α_{\max}	—	2.3	3.4	dB
1930.0 ... 1990.0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0.6	1.7	dB
1930.0 ... 1990.0 MHz					
Input VSWR		—	1.8	2.4	
1930.0 ... 1990.0 MHz					
Output VSWR		—	2.0	2.5	
1930.0 ... 1990.0 MHz					
CMRR ($S_{21}-S_{31} / S_{21}+S_{31}$)		16	21	—	dB
1930.0 ... 1990.0 MHz					
Attenuation	α				
0.2 ... 1000.0 MHz		45	50	—	dB
1000.0 ... 1510.0 MHz		35	45	—	dB
1510.0 ... 1805.0 MHz		30	39	—	dB
1805.0 ... 1850.0 MHz		26	32	—	dB
1850.0 ... 1890.0 MHz		23	37	—	dB
1890.0 ... 1910.0 MHz		8	16	—	dB
2010.2 ... 2070.0 MHz		6	19	—	dB
2070.0 ... 2400.0 MHz		22	27	—	dB
2400.0 ... 3000.0 MHz		30	36	—	dB
3000.0 ... 6000.0 MHz		30	38	—	dB


Maximum ratings of Filter 1

Operable temperature range	T	-40/+85	°C	
Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	5 ¹⁾	V	
ESD voltage	V _{ESD}	50 ²⁾	V	Machine Model
		325 ³⁾	V	Human Body Model
		600 ⁴⁾	V	Charged Device Model
Input power at				
GSM850, GSM900	P _{IN}	13	dBm	effective power in the on-state, duty cycle 4:8
GSM1800, GSM1900	P _{IN}	13	dBm	
Tx bands				

1) 168h Damp Heat Steady State acc. to IEC 60068-2-67 Cy.

2) acc. to JESD22-A115B (MM - Machine Model), 10 negative and 10 positive pulses.


3) acc. to JESD22-A114F (HBM - Human Body Model), 1 negative & 1 positive pulses.

4) acc. to JESD22-C101C (CDM - Field Induced Charged Device Model), 3 negative & 3 positive pulses.


Data sheet



Transfer function of filter 1 - narrowband

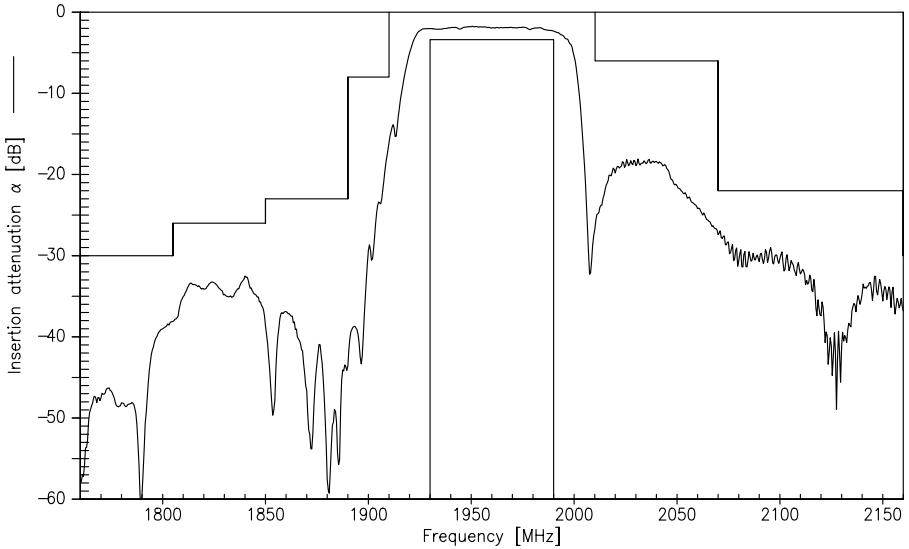

Transfer function of filter 1 - wideband

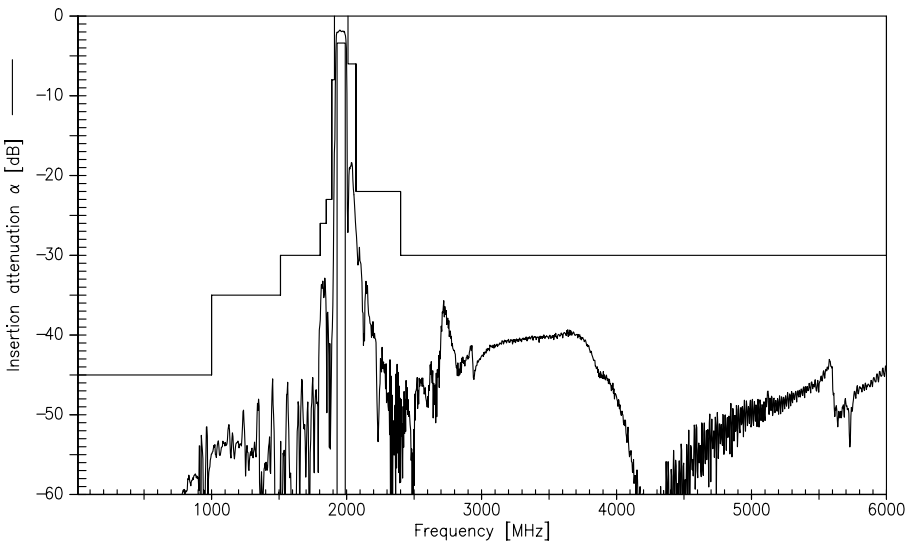


SAW Components **B9838**
SAW Rx 4in1 input/output duplex filter **881.5 / 942.5 / 1842.5 / 1960.0 MHz**

Data sheet




Smith Charts filter 1


S₁₁ function

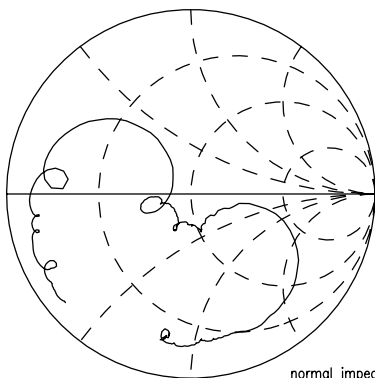


normal impedance: 50.00 Ω

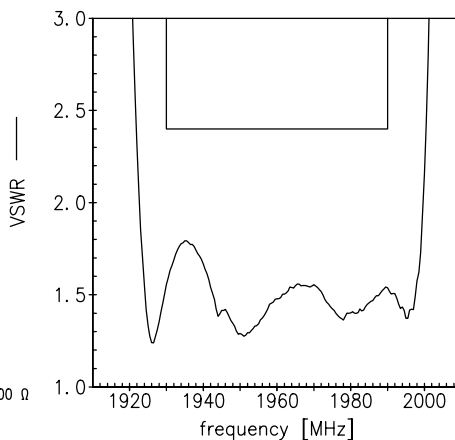

S₂₂ function

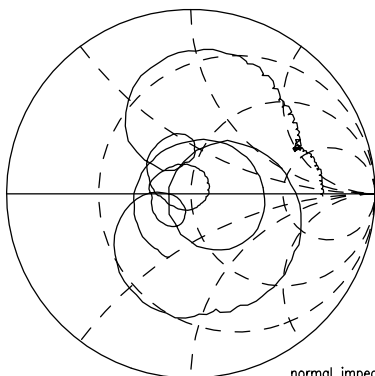

normal impedance: 150.0 Ω

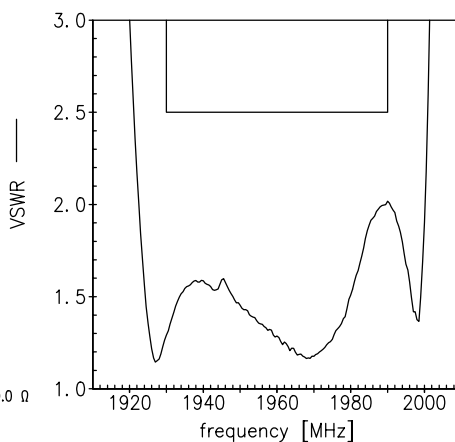

Data sheet


Characteristics of Filter 2 (GSM1800)

Temperature range for specification: $T = -20\text{ }^{\circ}\text{C to }+85\text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\Omega \parallel 6.3\text{ nH}$
 Terminating load impedance: $Z_L = 150\Omega \parallel 9.0\text{ nH}$

		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	1842.5	—	MHz
Maximum insertion attenuation	α_{\max}	—	2.3	3.4	dB
1805.0 ... 1880.0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0.9	2.0	dB
1805.0 ... 1880.0 MHz					
Input VSWR		—	2.0	2.5	
1805.0 ... 1880.0 MHz					
Output VSWR		—	1.9	2.4	
1805.0 ... 1880.0 MHz					
CMRR ($ S_{21}-S_{31} / S_{21}+S_{31} $)		17	21	—	dB
1805.0 ... 1880.0 MHz					
Attenuation	α				
10.0 ... 824.0 MHz		45	58	—	dB
824.0 ... 940.0 MHz		41	52	—	
940.0 ... 1690.0 MHz		27	40	—	dB
1690.0 ... 1705.0 MHz		27	40	—	
1705.0 ... 1785.0 MHz		10	16	—	dB
1920.0 ... 1980.2 MHz		20	27	—	
1980.2 ... 2030.0 MHz		24	36	—	dB
2030.0 ... 2650.0 MHz		28	36	—	
2650.0 ... 6000.0 MHz		30	42	—	dB


Maximum ratings of filter 2

Operable temperature range	T	-40/+85	°C	
Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	5 ¹⁾	V	
ESD voltage	V _{ESD}	50 ²⁾	V	Machine Model
		325 ³⁾	V	Human Body Model
		600 ⁴⁾	V	Charged Device Model
Input power at				
GSM850, GSM900	P _{IN}	13	dBm	effective power in the on-state, duty cycle 4:8
GSM1800, GSM1900	P _{IN}	13	dBm	
Tx bands				

1) 168h Damp Heat Steady State acc. to IEC 60068-2-67 Cy.

2) acc. to JESD22-A115B (MM - Machine Model), 10 negative and 10 positive pulses.


3) acc. to JESD22-A114F (HBM - Human Body Model), 1 negative & 1 positive pulses.

4) acc. to JESD22-C101C (CDM - Field Induced Charged Device Model), 3 negative & 3 positive pulses.


Data sheet



Transfer function of filter 2 - narrowband

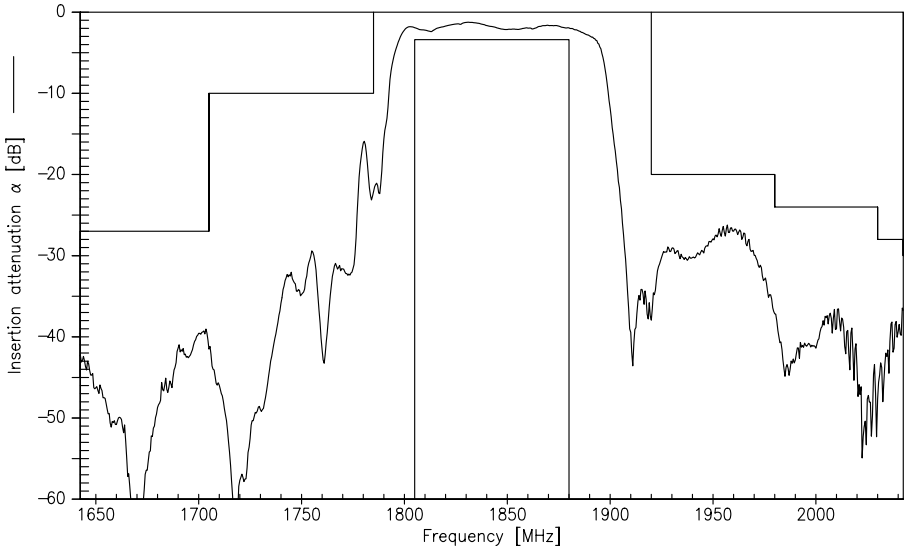

Transfer function of filter 2 - wideband


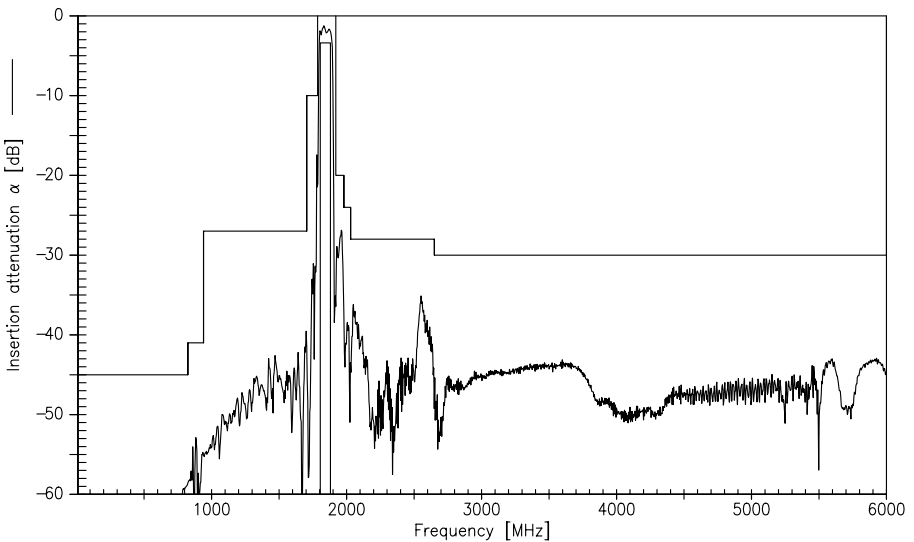


Data sheet





Smith Charts filter 2

S₁₁ function

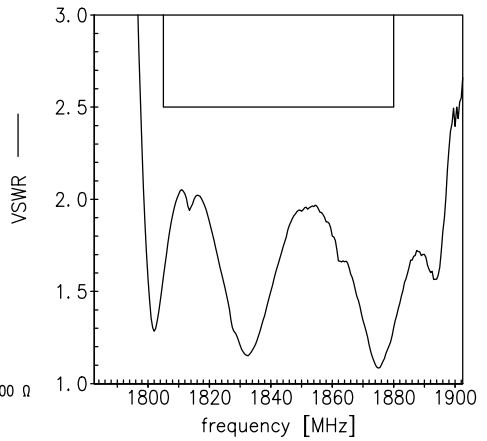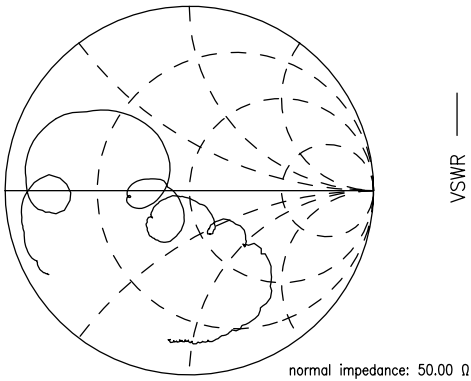

S₂₂ function

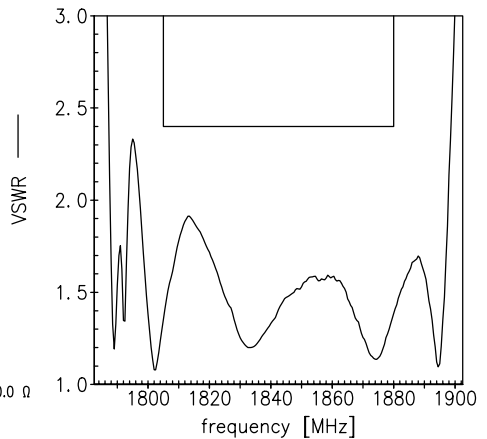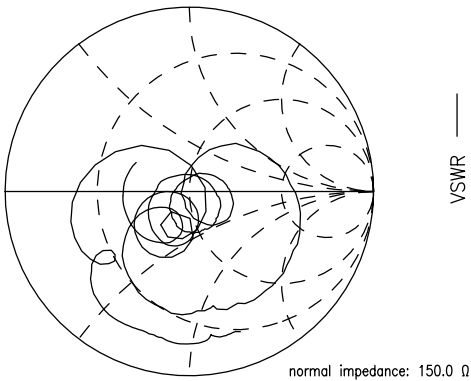

Data sheet


Characteristics of Filter 3 (GSM 900)

Temperature range for specification: $T = -20\text{ }^{\circ}\text{C to }+85\text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\Omega \parallel 6.3\text{nH}$
 Terminating load impedance: $Z_L = 150\Omega \parallel 21\text{nH}$

		min.	typ. @ 25°C	max.	
Center frequency	f_C	—	942.5	—	MHz
Maximum insertion attenuation	α_{\max}	—	2.2	3.1	dB
925.0 ... 960.0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0.9	1.8	dB
925.0 ... 960.0 MHz					
Input VSWR		—	1.8	2.4	
925.0 ... 960.0 MHz					
Output VSWR		—	1.6	2.3	
925.0 ... 960.0 MHz					
CMRR ($S_{21}-S_{31} / S_{21}+S_{31}$)		17	21	—	dB
925.0 ... 960.0 MHz					
Attenuation	α				
10.0 ... 480.0 MHz		45	73	—	dB
480.0 ... 850.0 MHz		30	47	—	
850.0 ... 905.0 MHz		21	31	—	dB
905.0 ... 915.0 MHz		10	17	—	
980.2 ... 1000.0 MHz		18	24	—	dB
1000.0 ... 1850.0 MHz		28	36	—	
1850.0 ... 1920.0 MHz		35	45	—	dB
1920.0 ... 3300.0 MHz		28	42	—	
3300.0 ... 6000.0 MHz		28	38	—	dB


Maximum ratings of Filter 3

Operable temperature range	T	-40/+85	°C	
Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	5 ¹⁾	V	
ESD voltage	V _{ESD}	50 ²⁾	V	Machine Model
		325 ³⁾	V	Human Bodel Model
		600 ⁴⁾	V	Charged Device Model
Input power at				
	GSM 850, GSM 900	P _{IN}	13	dBm
GSM 1800, GSM 1900	P _{IN}	13	dBm	
Tx bands				

¹⁾ 168h Damp Heat Steady State acc. to IEC 60068-2-67 Cy.

²⁾ acc. to JESD22-A115B (MM - Machine Model), 10 negative and 10 positive pulses.


³⁾ acc. to JESD22-A114F (HBM - Human Body Model), 1 negative & 1 positive pulses.

⁴⁾ acc. to JESD22-C101C (CDM - Field Induced Charged Device Model), 3 negative & 3 positive pulses.


Data sheet



Transfer function of filter 3 - narrowband

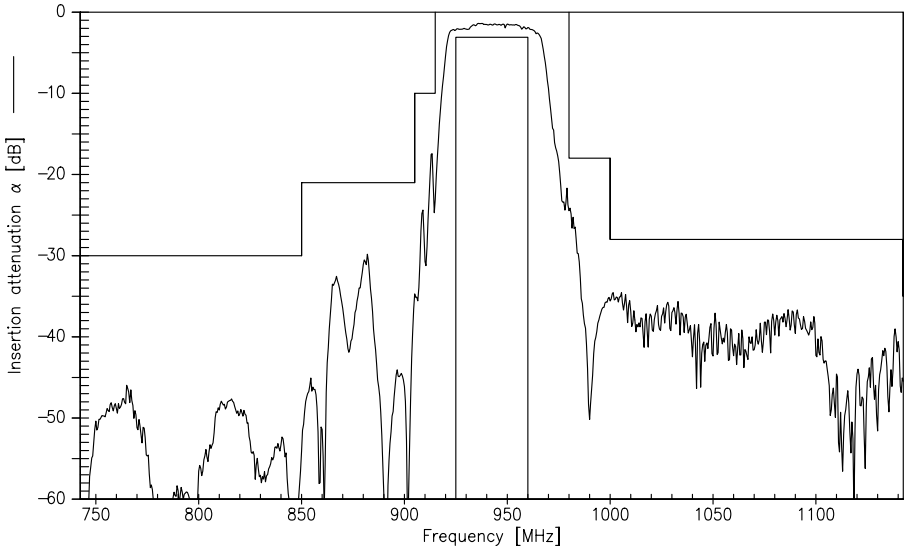

Transfer function of filter 3 - wideband


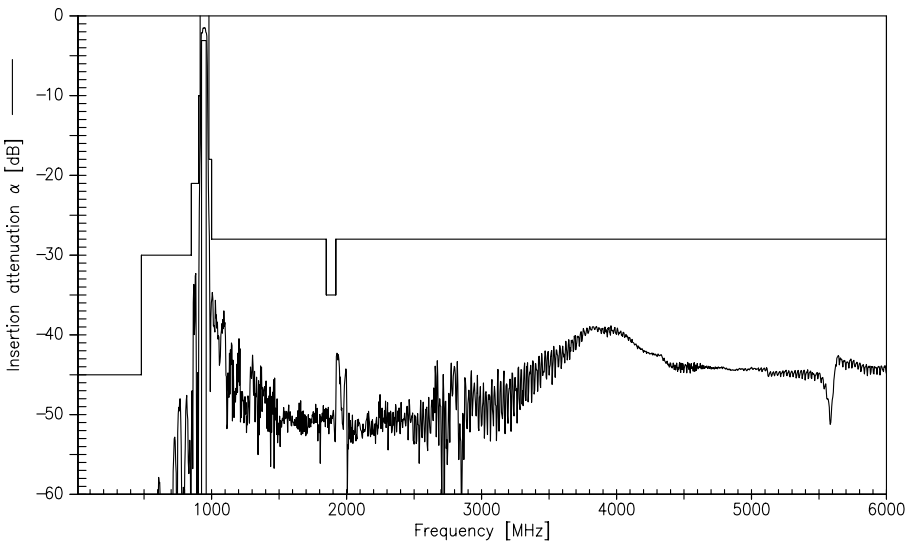


Data sheet





Smith Charts filter 3

S_{11} function

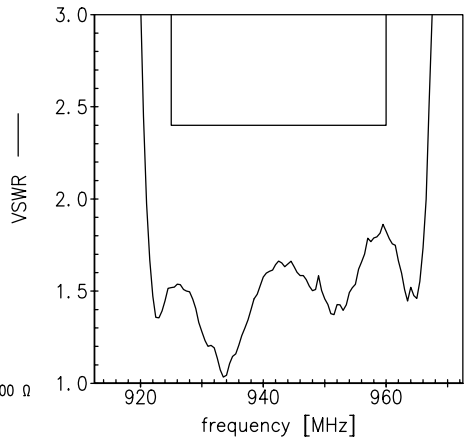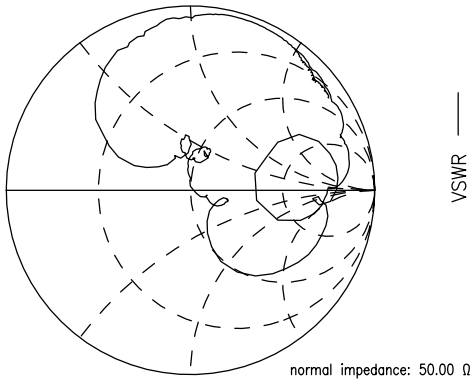

S_{22} function

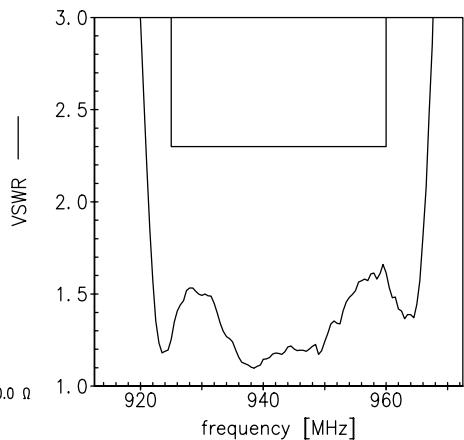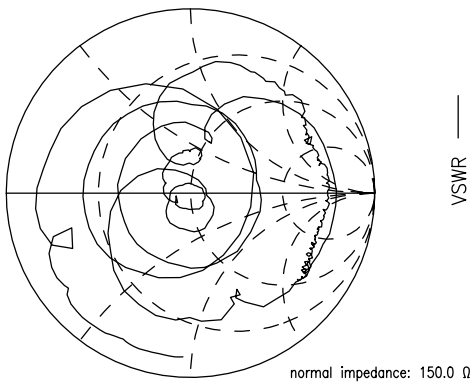

Data sheet


Characteristics of Filter 4 (GSM 850)

Temperature range for specification: $T = -20\text{ °C to }+85\text{ °C}$
 Terminating source impedance: $Z_S = 50\Omega \parallel 6.3\text{ nH}$
 Terminating load impedance: $Z_L = 150\Omega \parallel 21\text{ nH}$

		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	881.5	—	MHz
Maximum insertion attenuation	α_{\max}	—	1.8	2.8	dB
869.0 ... 894.0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0.5	1.5	dB
869.0 ... 894.0 MHz					
Input VSWR		—	1.8	2.4	
869.0 ... 894.0 MHz					
Output VSWR		—	1.7	2.3	
869.0 ... 894.0 MHz					
Common mode rejection ratio		17	23	—	dB
869.0 ... 894.0 MHz					
Attenuation	α				
10.0 ... 447.0 MHz		45	68	—	dB
447.0 ... 800.0 MHz		30	46	—	dB
800.0 ... 849.0 MHz		26	32	—	dB
914.2 ... 940.0 MHz		20	25	—	dB
940.0 ... 1000.0 MHz		24	41	—	dB
1000.0 ... 1850.0 MHz		28	41	—	dB
1850.0 ... 1920.0 MHz		35	42	—	dB
1920.0 ... 6000.0 MHz		28	35	—	dB

SAW Components	B9838
SAW Rx 4in1 input/output diplex filter	881.5 / 942.5 / 1842.5 / 1960.0 MHz

Data sheet



Maximum ratings of Filter 4

Operable temperature range	T	-40/+85	°C	
Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	5 ¹⁾	V	
ESD voltage	V _{ESD}	50 ²⁾	V	Machine Model
		325 ³⁾	V	Human Body Model
		600 ⁴⁾	V	Charged Device Model
Input power at				
GSM 850, GSM 900	P _{IN}	13	dBm	effective power in the on-state, duty cycle 4:8
GSM 1800, GSM 1900	P _{IN}	13	dBm	
Tx bands				

¹⁾ 168h Damp Heat Steady State acc. to IEC 60068-2-67 Cy.

²⁾ acc. to JESD22-A115B (MM - Machine Model), 10 negative and 10 positive pulses.


³⁾ acc. to JESD22-A114F (HBM - Human Body Model), 1 negative & 1 positive pulses.

⁴⁾ acc. to JESD22-C101C (CDM - Field Induced Charged Device Model), 3 negative & 3 positive pulses.


Data sheet



Transfer function of filter 4 - narrowband

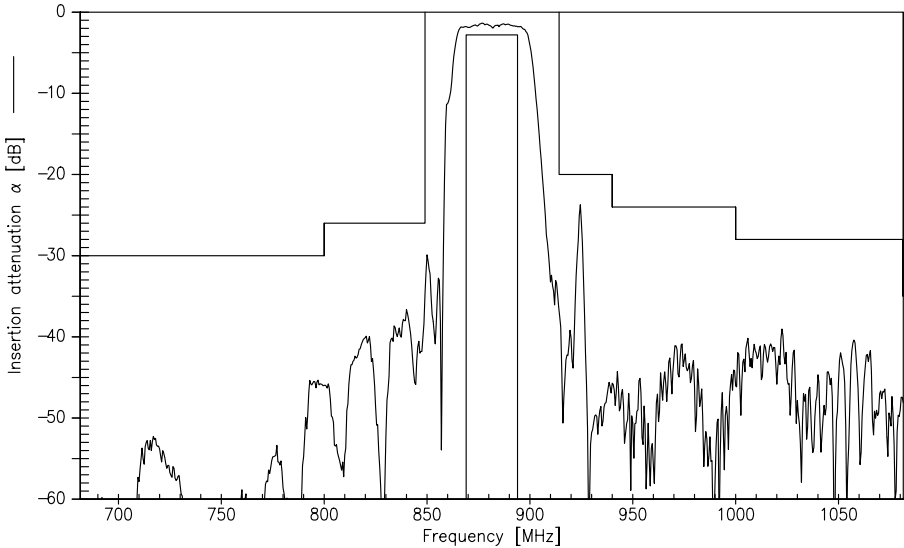

Transfer function of filter 4 - wideband


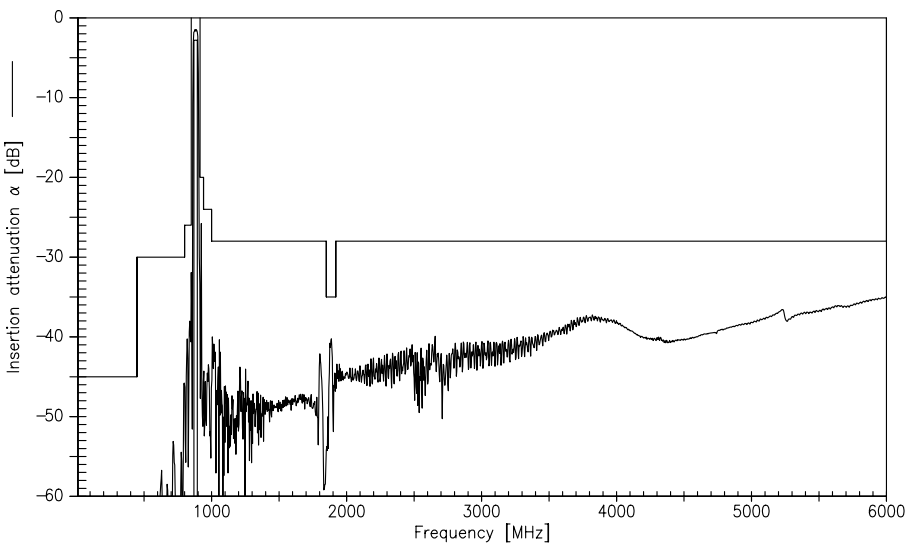


Data sheet





Smith Charts filter 4

S₁₁ function

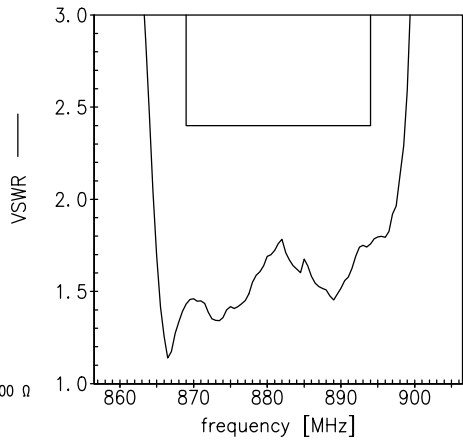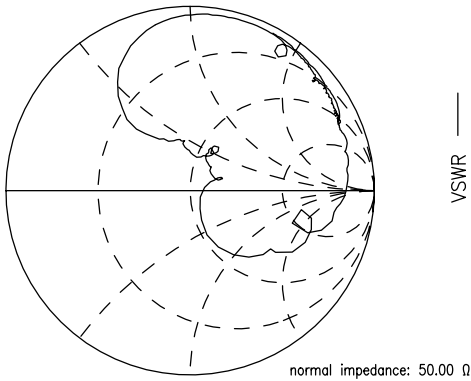

S₂₂ function

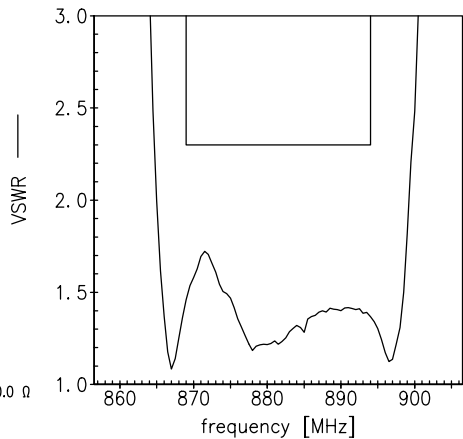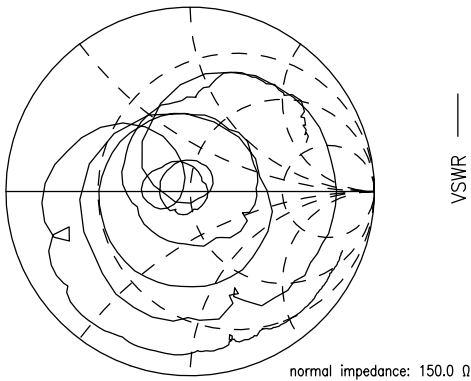

SAW Components	B9838
SAW Rx 4in1 input/output duplex filter	881.5 / 942.5 / 1842.5 /

Data sheet



References

Type	B9838
Ordering code	B39202B9838P810
Marking and package	C61157-A8-A43
Packaging	F61074-V8259-Z000
Date codes	L_1126
S-parameters	B9838_LB_NB.s4p, B9838_LB_WB.s4p B9838_UB_NB.s4p, B9838_UB_WB.s4p see file header for port/pin assignment table.
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8th, 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.
Matching coils	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm for a large variety of matching coils.

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG
Systems, Acoustics, Waves Business Group
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2014. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the “General Terms of Delivery for Products and Services in the Electrical Industry” published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, TFAP, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.